



Features

- DELTAWING 1200 4K DALI EM is a ceiling and wall surface, suspended LED luminaire with opal diffuser, 1160x160x60mm dimensions, 38W system power, 4,600lm flux and 121lm/W efficacy, CRi (Ra) >80, 4000K (Neutral White) CCT, chromaticity tolerance of 3-step MacAdam ellipse, DALI dimmable driver and 3hrs emergency with LiFePO4 battery, RAL9003 finishing, L70B50 100khrs / L80B50 80khrs lifespan, IK06 impact resistance, IP44 ingress protection rating (in ceiling surface installation), Electrical protection Class I, Glow wire test 850°C.

Product Overview


Cap/Base

N/A


Control gear type

LED driver constant current

Photometry

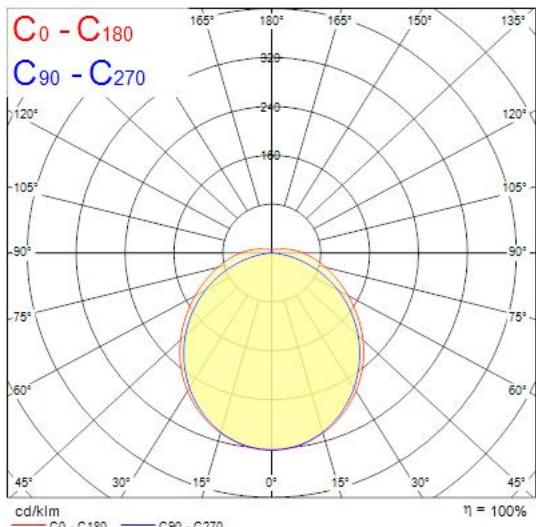

Technical drawings

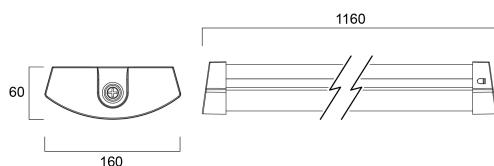

Light your world