

Two-way diverter for bath rim or tile edge installation - Chrome

SERIES SPECIFIC

29 140 670 Product version from 6/30/2015




- automatic bath/shower diverter
- hole diameter 32 mm
- rosette 60 x 60 mm
- 1/2" connection
- max. flow 64.9 l/min at 3 bar flow pressure
- WRAS


	Chrome	29 140 670-00
	Brushed Platinum	29 140 670-06
	Platinum	29 140 670-08
	Dark Chrome	29 140 670-19
	Brushed Light Gold (PVD)	29 140 670-27
	Brushed Durabrass (23kt Gold)	29 140 670-28
	Matte Black	29 140 670-33
	Brushed Gold (PVD)	29 140 670-37
	Brushed Dark Brass (PVD)	29 140 670-39
	Brushed Bronze (PVD)	29 140 670-42
	Brushed Dark Bronze (PVD)	29 140 670-43
	Brushed Champagne (22kt Gold)	29 140 670-46
	Champagne (22kt Gold)	29 140 670-47
	Brushed Chrome	29 140 670-93
	Brushed Dark Platinum	29 140 670-99

29 140 670 Product version from 6/30/2015

mm [inches]

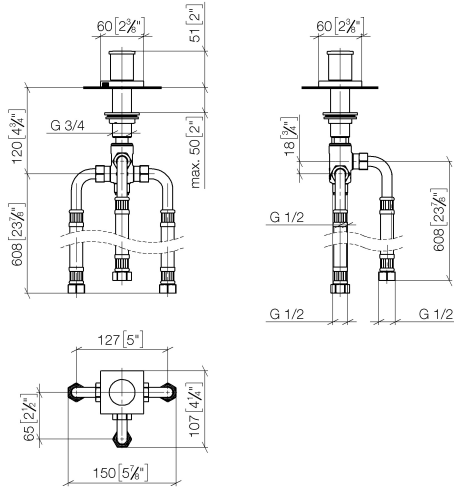

Flow rate chart

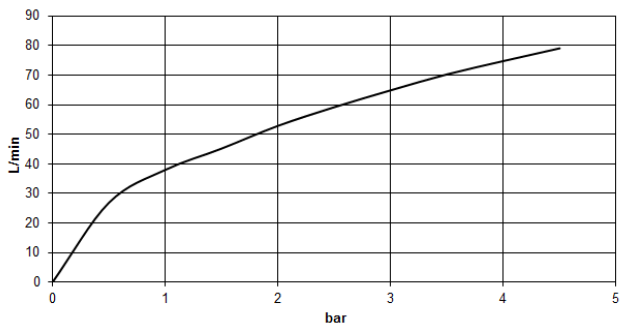

Codes & Standards

ASME A112.18.1	cUPC	DIN 4109	ISO 3822
----------------	------	----------	----------

Scottish Water Byelaws	UK Water Supply Regulations	Ü-Zeichen
---------------------------	--------------------------------	-----------



Two-way diverter for bath rim or tile edge installation - Chrome

SERIES SPECIFIC


29 140 670 Product version from 6/30/2015

Certificates and sustainability

WRAS_1911	LGA_29	IAPMO_4976	EPD-DOR-20230287 -IBA1-EN Environmental.prod uct-declarat
-----------	--------	------------	--

29 140 670 Product version from 6/30/2015

Parts for other
finishes can be found
here: Brushed
Platinum

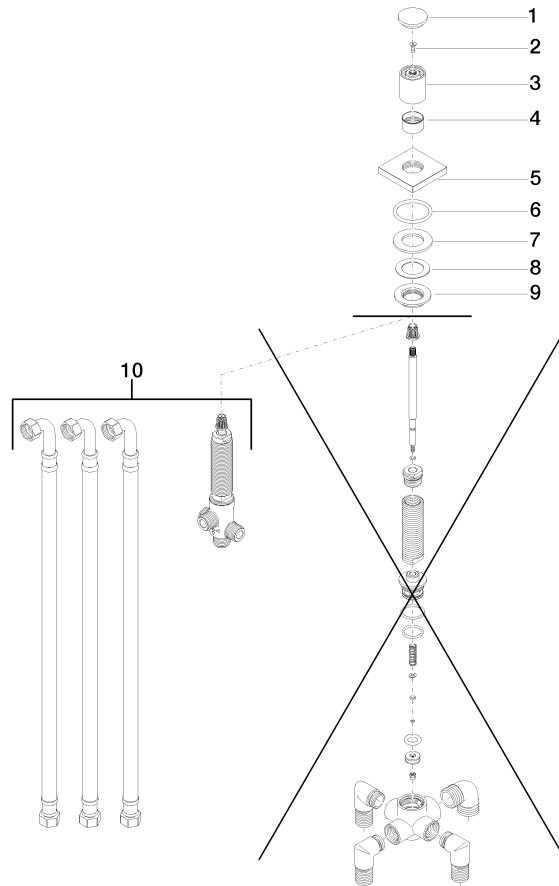

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
	5 09 27 67 006-00	Rosette 60 x 60 x 9 mm - Chrome	1.00	20
	1 09 20 71 003-00	Cover Ø 36 x 9,5 mm - Chrome	1.00	20
	7 09 14 05 014 90	Washer NBR 70 48,0 x 27,0 x 3,0 mm -	1.00	14
	8 09 14 40 002 90	Washer Vf 3110 41,0 x 27,0 x 1,0 mm -	1.00	14
	3 09 20 71 002-00	Handle for 2-way diverter Ø 32 x 36 mm - Chrome	1.00	20
	10 90 17 09 051 00 90	Diverter Spare part for 04.17.09.041.15.90 716x133x80 mm -	1.00	14
	9 09 23 10 004 90	Mounting with collar Screw connection 3/4" -	1.00	14
	2 90 30 30 014 00 90	Mounting Countersunk screw with hexagon socket M4 x 12 mm -	1.00	14
	4 09 16 01 012-00	Ring Ø 26,5 x 15 mm - Chrome	1.00	20
	6 90 14 10 043 00 90	O-Ring 40,0 x 4,0 mm -	1.00	14