


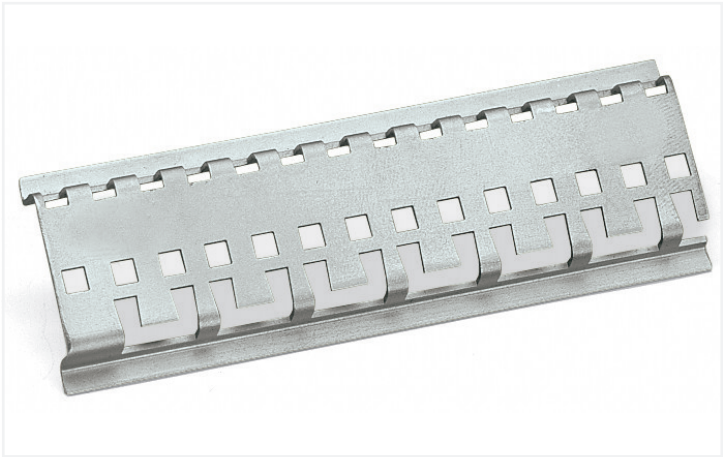

Color: silver-colored

Physical data		
Width	1000 mm / 39.37 inches	

Material data		
Color	silver-colored	
Fire load	0 MJ	
Weight	256 g	

Commercial data		
eCl@ss 10.0	27-40-06-02	
eCl@ss 9.0	27-40-06-02	
ETIM 8.0	EC001285	
ETIM 7.0	EC001285	
PU (SPU)	1 pcs	
Packaging type	Box	
Country of origin	IT	
GTIN	4045454701109	
Customs tariff number	72169180000	

Environmental Product Compliance		
RoHS Compliance Status	Compliant,No Exemption	



Downloads

Environmental Product Compliance

Compliance Search			
Environmental Product Compliance 790-145			↓

Documentation

Bid Text			
790-145	19.02.2019	xml 2.53 KB	↓
790-145	31.08.2017	doc 23.00 KB	↓

CAD/CAE-Data

CAD data	
2D/3D Models 790-145	↓

CAE data	
EPLAN Data Portal 790-145	↓
WSCAD Universe 790-145	↓
ZUKEN Portal 790-145	↓

1 Compatible Products

1.1 Optional Accessories


1.1.1 Shield termination

1.1.1.1 Shield termination




Item No.: [790-144](#)
Stand off; for carrier rail; suitable for M5 size screw; with special perforations


Installation Notes




Securing a spacer sleeve to a specialty slotted DIN-rail.




Securing an additional shield clamping saddle.



Tightening/removing a shield clamping saddle.



After connection, tighten the knurled screw to complete the installation.
Recommended tightening torque: 0.5 Nm



To remove the clamping saddle, unscrew until ratcheted mechanism is released, then slightly tip saddle and remove the clamping saddle.