




Features

- START eco Downlight is an integrated LED surface mounted downlight with built-in non dimmable driver; 12W; 950Lm; 79Lm/W; 4000K.

Product Overview

Product name	START eco Downlight 165 950lm 840 Surface
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Fixture luminous flux (lm)	950
Luminaire efficacy (lm/W)	79
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	12
Electrical protection	Class II
LED Flickering Rate	Medium (21% - 40%)
Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK02
Product EAN number	5410288541068
Warranty	3 years

Photometry

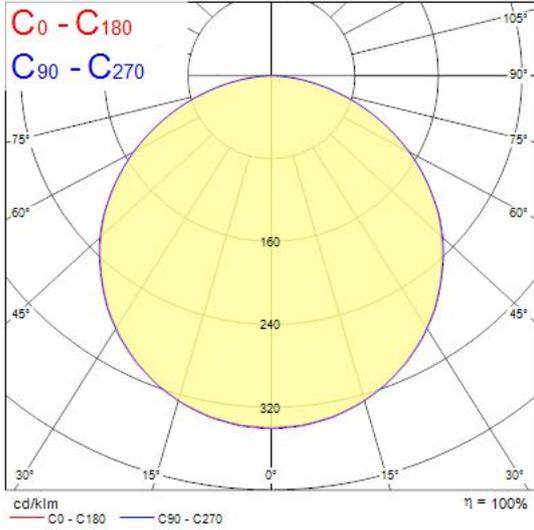

Technical drawings

