


Walraven W-LX-H Concrete Screw

(L0355)

ultimate performance zinc-plated concrete screws for anchoring in cracked and non-cracked concrete

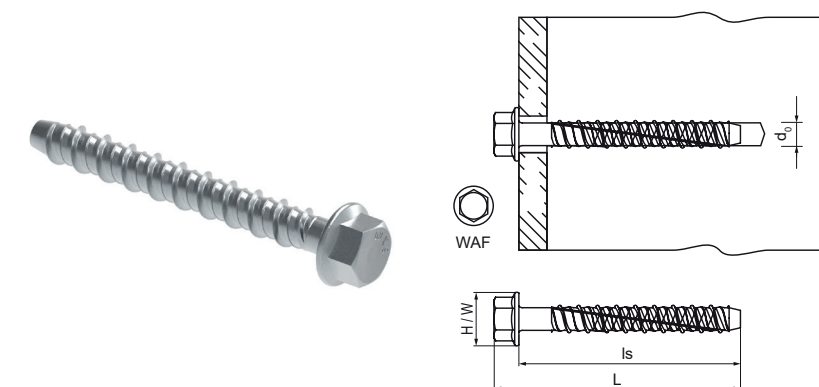

Features & benefits

- very high load capacity
- up to 3 anchoring depths provide maximum installation and design flexibility
- reduced edge and anchor spacing distances
- unique tip and thread geometry prevents concrete spalling
- material: steel
- zinc plated
- fire resistance class R30-R120
- seismic performance categories C1 and C2 (Ø 8/10/14)
- complies with VdS CEA 4001:2014-04 (05) and VdS CEA 4001:2018-01 (06) for applications with sprinkler systems in concrete elements
- substrate type: cracked concrete, non-cracked concrete, precast pre-stressed hollow core slabs
- for loads and more information, refer to the product data sheets and/or the ETA reports

Product Number	Screw Length	Anchor Size	Width Across Flats	Drill Hole Diameter	Total Width x Total Height x Total Length
Reference letter	Ls		WAF	d0	W x H x L
Unit description	mm		mm	mm	mm x mm x mm
62430304	40	6	10	6	13 x 13 x 46.6
62430306	60	6	10	6	13 x 13 x 66.6
62430308	75	6	10	6	12.9 x 12.9 x 81.6
62430406	60	8	13	8	15.8 x 15.8 x 68.1
62430408	75	8	13	8	16 x 16 x 83.1
62430409	90	8	13	8	16 x 16 x 98.1
62430410	100	8	13	8	16 x 16 x 108.1
62430412	120	8	13	8	16 x 16 x 128.1
62430507	65	10	15	10	21 x 21 x 74.2
62430509	90	10	15	10	21 x 21 x 99.2
62430510	100	10	15	10	21 x 21 x 109.2
62430512	120	10	15	10	21 x 21 x 129.2
62430608	75	12	16	12	24.3 x 24.3 x 86.5
62430610	100	12	16	12	24.3 x 24.3 x 111.5
62430713	135	14	19	14	29 x 29 x 148