

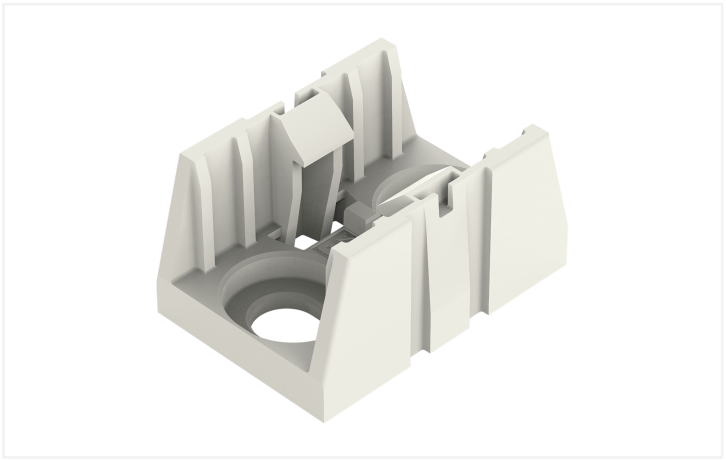


Color: white

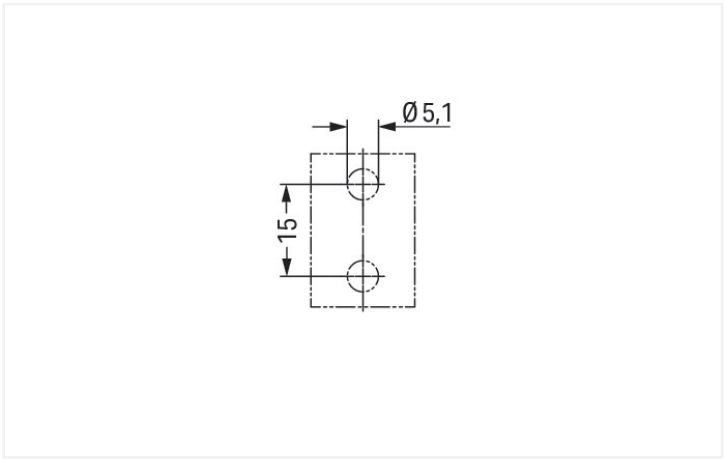

Dimensions in mm

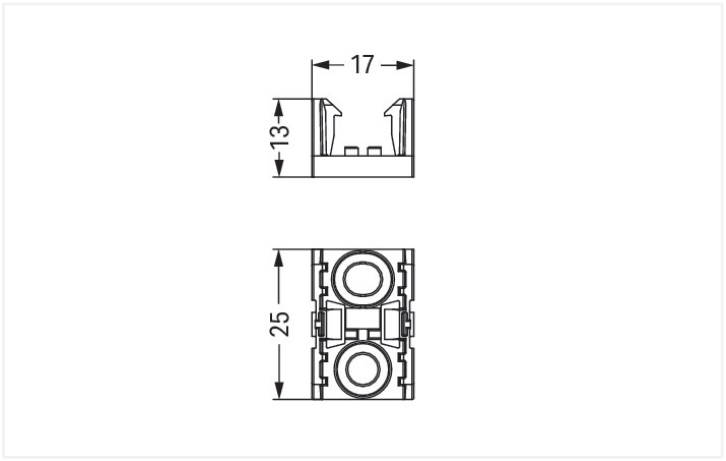

Dimensions in mm

Mounting accessories *WINSTA*® MINI 2-pole

With the mounting accessories from the *WINSTA*® MINI product line, error-free electrical installation is guaranteed. An extensive range of accessories complements the WINSTA® product line from WAGO. Thanks to its particularly small dimensions, our *WINSTA*® MINI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology is very suitable in very tight spaces, i.e., for installations when very little room is available.

WINSTA® MINI solutions for your electrical installation – protected against mismating and maintenance-free

The WINSTA® Pluggable Connection System allows pluggable electrical installation. This significantly reduces the need for servicing and lowers costs. Choose durability and quality – with protection against mismating from WAGO makes the installation of electrical components visibly easier.

- consistent IP40 protection
- convenient installation and commissioning

Notes

General safety information	**NOTICE: Observe installation and safety instructions!** • Nur von Elektrofachkraft oder einer für die Tätigkeit elektrisch unterwiesenen Person (EUP nach DIN VDE 0105-100) anzuwenden! • Nicht unter Spannung/Last installieren! • Nur für bestimmungsgemäßen Gebrauch einsetzen! • Nationale Vorschriften/Normen/Richtlinien beachten! • Technische Daten der Produkte beachten! • Auf die richtige Polbelegung achten! • Keine beschädigten/verschmutzten Komponenten verwenden! • Leiterarten, -querschnitte, Abisolierlängen und Leitungsdurchmesser beachten! • Leiter bis zum Anschlag einführen! • Nur mit Verriegelungsklinke und Zugentlastung verwenden! • Originalzubehör verwenden! **To be sold only with installation instructions!**

Connection Data

Connection 1

Pole number	2

Physical data

Width	17 mm / 0.669 inches
Height	13 mm / 0.512 inches
Depth	25 mm / 0.984 inches

Mechanical data

Variable coding	No
Mounting type	Screw mount
Suitable	for distribution connectors (except T-distribution connectors); 2-pole

Material data

Note (material data)	Information on material specifications can be found here
Color	white
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.088 MJ
Weight	1.6 g

Environmental requirements

Processing temperature	-5 … +40 °C
Continuous operating temperature	-35 … +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Continued on next page

Commercial data

Product Group	20 (Winsta)
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454684617
Customs tariff number	39269097900

Product Classification

UNSPSC	39121311
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 9.0	EC002863
ETIM 10.0	EC002863
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 890-1672

Documentation

Bid Text

890-1672	11.03.2015	doc 21.50 KB	
890-1672	19.02.2019	xml 2.55 KB	

CAD/CAE-Data

CAD data

2D/3D Models 890-1672

CAE data

WSCAD Universe 890-1672

ZUKEN Portal 890-1672