

### Features

- Quantum is a range of recessed integrated LED panels for general indoor lighting applications such as breakout areas, offices and meeting rooms. With the help of DIP Switch multiple lumen outputs can be set up in 4 steps (29W 3700lm, 31W 4000lm, 33W 4300lm, 35W 4500lm). Lumen output using EM kit: ~500lm. Max. drive current: 700mA; Lifespan: 120.000Hrs L70:B50; 4000K; CRI 90; Efficacy up to: 130Lm/W; Glare control <19; IK03; IP54 (from the front); Class II; Tp(a) rated diffuser that self-extinguishes within 5 sec when a flame has been removed.


### Product Overview

<b>Product name</b>	Quantum IP54 600x600 Multipower 4500lm 940
<b>Technology</b>	LED (3 SDCM)
<b>Cap/Base</b>	N/A
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling recessed mounting
<b>General application</b>	Office, Education
<b>ETIM Class</b>	EC002892
<b>E-number FI</b>	4279441
<b>Fixture luminous flux (lm)</b>	4500
<b>Luminaire efficacy (lm/W)</b>	129
<b>Correlated colour temperature (k)</b>	4000
<b>Light colour</b>	Neutral White
<b>CRI (Ra)</b>	90
<b>Colour Variation Initial (SDCM)</b>	3
<b>Beam Angle (°)</b>	85
<b>Glare control</b>	< 19
<b>Photobiological Risk Group</b>	RG0
<b>Total power consumption (W)</b>	35


Light your world

Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9003
IP rating	IP54/20
IK rating	IK03
Product EAN number	5410288446486
Warranty	5 years
Dimming method	N/A
Useful luminous flux (#use)	4500

#### Photometry

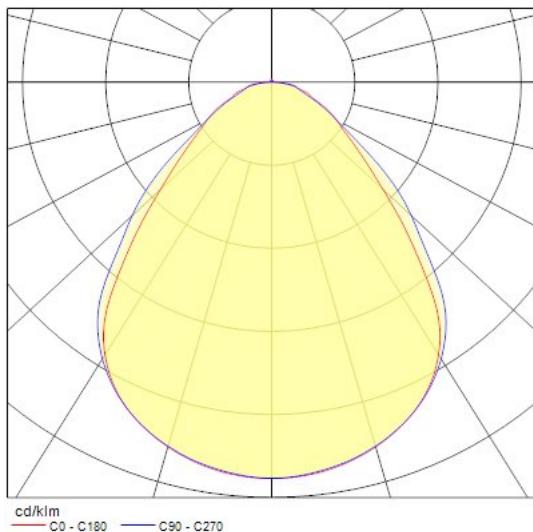

#### Technical drawings

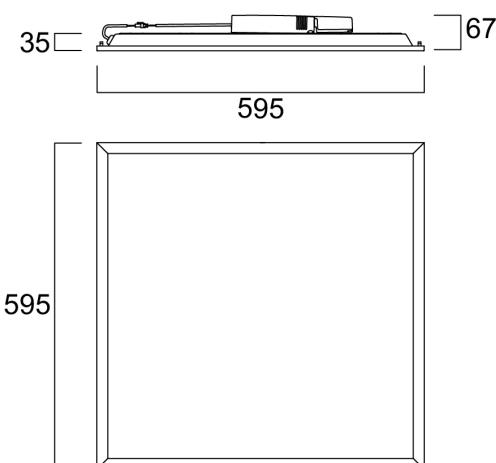

Light your world