


START Downlight Flat IP44 Dimmable 108MM Round Recessed

Start Downlight Flat 108 IP44 550LM 830 DIM

0054118

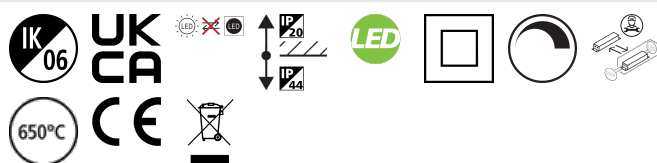

PRODUCT OVERVIEW

Product name	Start Downlight Flat 108 IP44 550LM 830 DIM
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
E-number FI	4278490
Warranty	5 years
Fixture luminous flux (lm)	550
Luminaire efficacy (lm/W)	78
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	7
Electrical protection	Class II
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK06
Product EAN number	5410288541181

DATA TABLE

General data

Product name	Start Downlight Flat 108 IP44 550LM 830 DIM
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting

START Downlight Flat IP44 Dimmable 108MM Round Recessed

Start Downlight Flat 108 IP44 550LM 830 DIM

0054118

Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
E-number FI	4278490
Warranty	5 years

Optical data

Fixture luminous flux (lm)	550
Luminaire efficacy (lm/W)	78
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 28
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	7
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.9
Electrical protection	Class II
Control gear type	LED driver constant current
Drive current (mA)	180
Inrush Current (A)	2.35
Inrush Duration (µs)	120
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	133
Max. products per 20A B Breaker	267
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	1.5

Lifetime data

Lifespan L70 B50	78000
Lifespan L80 B20	43000
Lifespan L80 B10	42000
Lifespan L90 B10	23000

Physical data

Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK06
Diffuser finish	Opal
Diffuser material	PS Polystyrene
Nominal Product Diameter (mm)	120

START Downlight Flat IP44 Dimmable 108MM Round Recessed

Start Downlight Flat 108 IP44 550LM 830 DIM
0054118

Weight (kg)	0.237
-------------	-------


Packaging

Single packaging type	Carton
Product EAN number	5410288541181
Packaging single width (cm)	12.5
Packaging single depth (cm)	4.2
DUN14 (outer)	15410288541188
Packaging outer length / height (cm)	39.0

Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

PHOTOMETRY

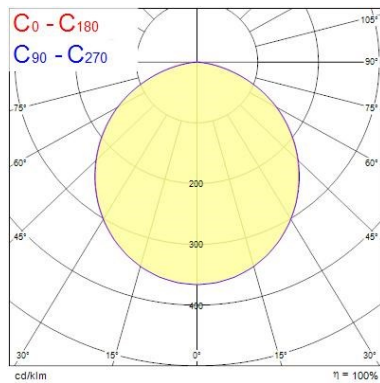

Distance [m]	Cone diameter [m]	E [lx]	E (C90) [lx]	E (C0) [lx]	Illuminance [lx]
0.5	1.42	208	77	78	
	1.41				
1.0	2.85	201	19	20	
	2.81				
1.5	4.27	90	9	9	
	4.22				
2.0	5.69	50	5	5	
	5.63				
2.5	7.11	32	3	3	
	7.04				
3.0	8.54	22	2	2	
	8.44				

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 109.2°)
— C90 - C270 (Half beam angle: 109.8°)

TECHNICAL DRAWINGS

