
Data Sheet | Item Number: 890-1622

Mounting plate; 2-pole; for distribution connectors; black


https://www.wago.com/890-1622



Color: ■ black



Dimensions in mm

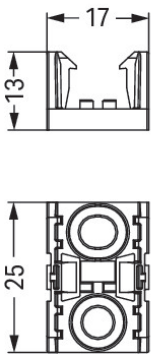

Dimensions in mm

Mounting accessories *WINSTA*® MINI 2-pole

Put your trust in proven sustainability for the electrical installation in your project: The mounting accessories from the *WINSTA*® MINI product line. With WAGO, you benefit from a large selection of expansions for the WINSTA® product line. *WINSTA*® MINI is our response to the trend toward miniaturisation. Our smallest pluggable connection system is primarily suited for lights, for example, since as a result of LED technology; due to complex systems, these offer less and less space for the connection technology.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

The WINSTA® Pluggable Connection System allows pluggable electrical installation. This saves time, lowers costs, and reduces the need for servicing. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with protection against mismating from WAGO.

- consistent IP40 protection
- fast, secure installation

Notes

General safety information	**NOTICE: Observe installation and safety instructions!** • Nur von Elektrofachkraft oder einer für die Tätigkeit elektrisch unterwiesenen Person (EUP nach DIN VDE 0105-100) anzuwenden! • Nicht unter Spannung/Last installieren! • Nur für bestimmungsgemäßen Gebrauch einsetzen! • Nationale Vorschriften/Normen/Richtlinien beachten! • Technische Daten der Produkte beachten! • Auf die richtige Polbelegung achten! • Keine beschädigten/verschmutzten Komponenten verwenden! • Leiterarten, -querschnitte, Abisolierlängen und Leitungsdurchmesser beachten! • Leiter bis zum Anschlag einführen! • Nur mit Verriegelungsklinke und Zugentlastung verwenden! • Originalzubehör verwenden! **To be sold only with installation instructions!**

Connection Data

Connection 1

Pole number	2

Physical data

Width	17 mm / 0.669 inches
Height	13 mm / 0.512 inches
Depth	25 mm / 0.984 inches

Mechanical data

Variable coding	No
Mounting type	Screw mount
Suitable	for distribution connectors (except T-distribution connectors); 2-pole

Material data

Note (material data)	Information on material specifications can be found here
Color	black
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.049 MJ
Weight	1.6 g

Environmental requirements

Processing temperature	-5 … +40 °C
Continuous operating temperature	-35 … +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Continued on next page

Commercial data

Product Group	20 (Winsta)
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454684600
Customs tariff number	39269097900

Product Classification

UNSPSC	39121311
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 9.0	EC002863
ETIM 10.0	EC002863
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 890-1622

Documentation

Bid Text

890-1622	11.03.2015	doc 21.50 KB	
890-1622	19.02.2019	xml 2.55 KB	

CAD/CAE-Data

CAD data

2D/3D Models 890-1622

CAE data

WSCAD Universe 890-1622

ZUKEN Portal 890-1622