
Data Sheet | Item Number: 890-624

Mounting plate; 4-pole; for distribution connectors; Plastic; black


https://www.wago.com/890-624



Color: ■ black

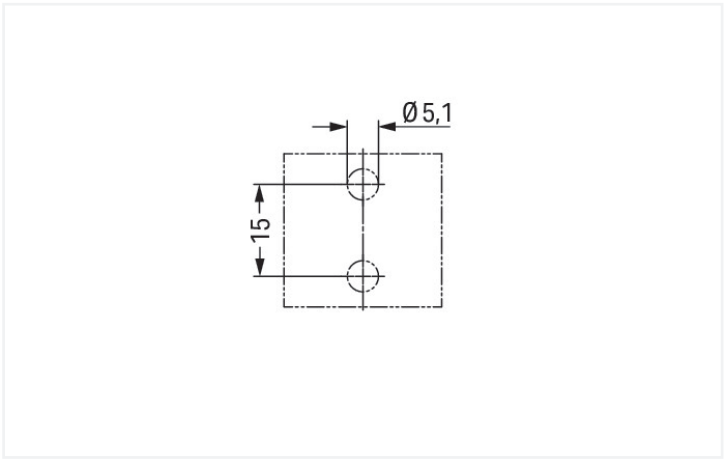

Dimensions in mm

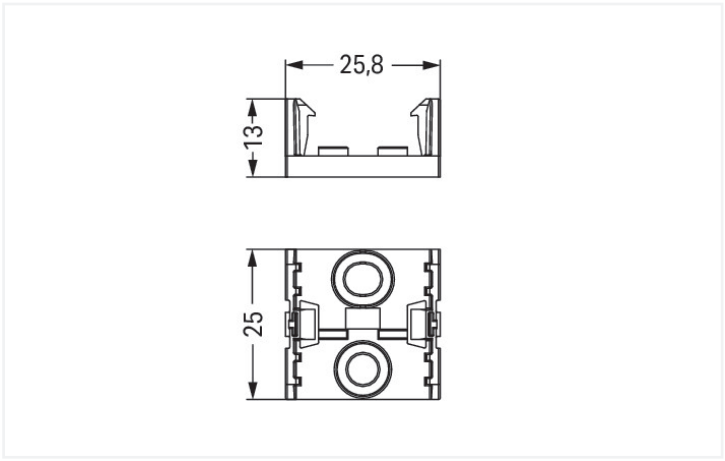

Dimensions in mm

Mounting accessories *WINSTA*® MINI 4-pole

Implement your installation project without difficulty: The mounting accessories from the *WINSTA*® MINI product line is the product of your choice for error-free electrical installation. You can rely on the quality of WINSTA® components from WAGO for your electrical installation accessories too. Due to its particularly small dimensions, our *WINSTA*® MINI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology is very suitable in very tight spaces, i.e., for connections when very little room is available.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

The WINSTA® Pluggable Connection System is perfectly tailored to the very strict requirements of building installation. It makes electrical installation pluggable, and thus more efficient, more reliable, and error-free. Using this pre-assembled system reduces assembly times and installation errors at the construction site. Now you can also cut installation expenses without compromising safety and quality: with protection against mismating reduces the need for servicing and prevents unnecessary downtime.

- compact design for conductors with a cross-section up to 1.5 mm²
- fast, secure installation

Notes

General safety information	**NOTICE: Observe installation and safety instructions!** • Nur von Elektrofachkraft oder einer für die Tätigkeit elektrisch unterwiesenen Person (EUP nach DIN VDE 0105-100) anzuwenden! • Nicht unter Spannung/Last installieren! • Nur für bestimmungsgemäßen Gebrauch einsetzen! • Nationale Vorschriften/Normen/Richtlinien beachten! • Technische Daten der Produkte beachten! • Auf die richtige Polbelegung achten! • Keine beschädigten/verschmutzten Komponenten verwenden! • Leiterarten, -querschnitte, Abisolierlängen und Leitungsdurchmesser beachten! • Leiter bis zum Anschlag einführen! • Nur mit Verriegelungsklinke und Zugentlastung verwenden! • Originalzubehör verwenden! **To be sold only with installation instructions!**

Connection Data

Connection 1

Pole number	4

Physical data

Width	25.8 mm / 1.016 inches
Height	13 mm / 0.512 inches
Depth	25 mm / 0.984 inches

Mechanical data

Mounting type	Screw mount
Suitable	for distribution connectors (except T-distribution connectors); 4-pole

Material data

Note (material data)	Information on material specifications can be found here
Color	black
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.064 MJ
Weight	2.1 g

Environmental requirements

Processing temperature	-5 … +40 °C
Continuous operating temperature	-35 … +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Continued on next page

Commercial data

Product Group	20 (Winsta)
PU (SPU)	50 (50) pcs
Packaging type	Box
Country of origin	DE
GTIN	4055143838559
Customs tariff number	39269097900

Product Classification

UNSPSC	39121321
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 9.0	EC002863
ETIM 10.0	EC002863
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

Approvals for marine applications

Approval	Standard	Certificate Name
LR Lloyds Register	EN 61535	LR23317167TA

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 890-624

Documentation

Bid Text

890-624	11.03.2015	doc 21.50 KB
890-624	19.02.2019	xml 2.55 KB

Continued on next page

CAD/CAE-Data

CAD data	CAE data
2D/3D Models 890-624	WSCAD Universe 890-624
	ZUKEN Portal 890-624