


## START Downlight Flat IP44 Dimmable 108MM Round Recessed

*Start Downlight Flat 108 IP44 600LM 840 DIM*

0054119

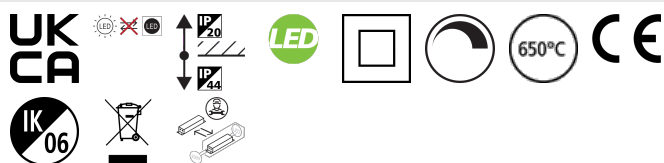

### PRODUCT OVERVIEW

Product name	Start Downlight Flat 108 IP44 600LM 840 DIM
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
E-number FI	4278491
Warranty	5 years
Fixture luminous flux (lm)	600
Luminaire efficacy (lm/W)	85
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	7
Electrical protection	Class II
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK06
Product EAN number	5410288541198

### PHOTOMETRY


## START Downlight Flat IP44 Dimmable 108MM Round Recessed

Start Downlight Flat 108 IP44 600LM 840 DIM  
0054119

Distance (m)	Cone diameter (m)	E07	E07	E07
0.5	1.41 1.43	881	86	82
1.0	2.81 2.86	220	21	21
1.5	4.22 4.28	96	9	9
2.0	5.63 5.71	56	5	5
2.5	7.04 7.14	36	3	3
3.0	8.44 8.57	24	2	2

Distance (m)      Cone diameter (m)      Illuminance (lx)

— C0 - C180 (Half beam angle: 109.2°)  
— C90 - C270 (Half beam angle: 109.2°)

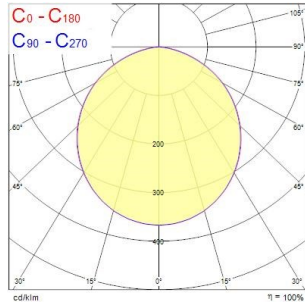

### TECHNICAL DRAWINGS

