
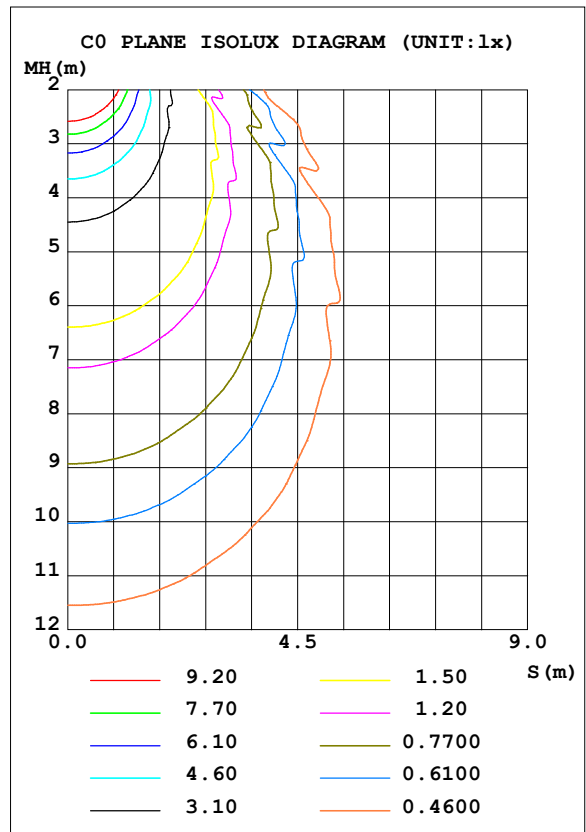


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:6.0000V I:0.280A P:1.6800W PF:1.0000 Freq:0Hz Lamp Flux:230.367x1 lm		
NAME: 600-021	TYPE:	WEIGHT:1
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:326*94mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 137.12 lm/W			
MODEL	600-021	I _{max} (cd)	65.29	S/MH (C0/180)	1.14
NOMINAL POWER (W)	6	LOR (%)	100.0	S/MH (C90/270)	1.50
RATED VOLTAGE (V)	5.8~6	TOTAL FLUX (lm)	230.37	η UP, DN (C0-180)	0.7, 50.5
NOMINAL FLUX (lm)	230.367	CIE CLASS	DIRECT	UP, DN (C180-360)	0.7, 48.1
LAMPS INSIDE	1	η up (%)	1.4	CIBSE SHR NOM	1.50
TEST VOLTAGE (V)	6	down (%)	98.6	CIBSE SHR MAX	1.55

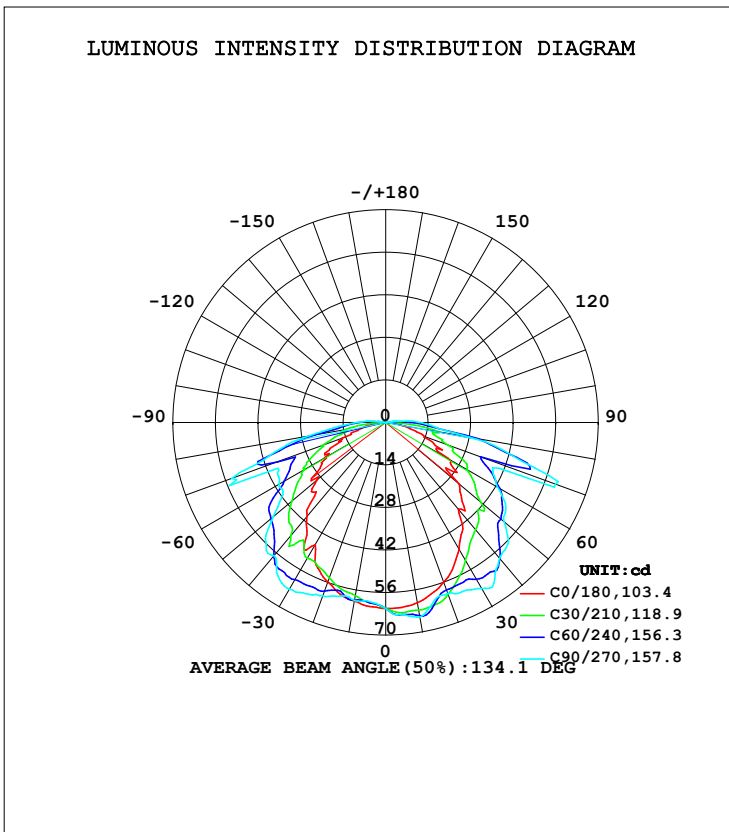

C Range: 0 - 360DEG

γ

Test Speed: HIGH

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	60.18	63.38	65.02	63.75	59.66	58.39	59.51	58.46	0- 10	5.840	5.840	2.53,2.53
20	55.90	58.90	59.90	58.95	55.80	55.97	60.68	56.29	10- 20	16.83	22.67	9.84,9.84
30	48.28	55.01	63.15	54.28	46.46	55.50	63.39	55.41	20- 30	26.19	48.86	21.2,21.2
40	37.22	54.06	58.36	54.40	40.38	54.62	57.24	54.20	30- 40	33.82	82.68	35.9,35.9
50	31.69	46.35	50.95	47.95	29.55	46.51	48.47	45.86	40- 50	36.91	119.6	51.9,51.9
60	23.75	38.50	42.48	37.99	23.23	39.22	40.57	41.81	50- 60	35.18	154.8	67.2,67.2
70	13.49	29.95	59.40	30.45	15.27	26.49	53.92	27.44	60- 70	31.41	186.2	80.8,80.8
80	5.182	27.26	28.04	27.69	5.577	21.53	25.36	21.48	70- 80	28.94	215.1	93.4,93.4
90	0.7906	5.778	11.18	6.293	0.7935	5.351	9.388	5.613	80- 90	12.05	227.2	98.6,98.6
100	1.339	0.2430	3.902	0.6802	1.656	0.5858	2.740	0.2872	90-100	3.102	230.3	100,100
110	0	0	0	0	0	0	0	0	100-110	0.0878	230.4	100,100
120	0	0	0	0	0	0	0	0	110-120	0	230.4	100,100
130	0	0	0	0	0	0	0	0	120-130	0	230.4	100,100
140	0	0	0	0	0	0	0	0	130-140	0	230.4	100,100
150	0	0	0	0	0	0	0	0	140-150	0	230.4	100,100
160	0	0	0	0	0	0	0	0	150-160	0	230.4	100,100
170	0	0	0	0	0	0	0	0	160-170	0	230.4	100,100
180	0	0	0	0	0	0	0	0	170-180	0	230.4	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:songfucheng
 Test Date:2019-10-16

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:6.0000V I:280.00A P:1.6800W PF:1.0000 Freq:0Hz Lamp Flux:230.367x1 lm		
NAME: 600-021	TYPE:	WEIGHT:1
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:326*94mm	Shielding Angle:

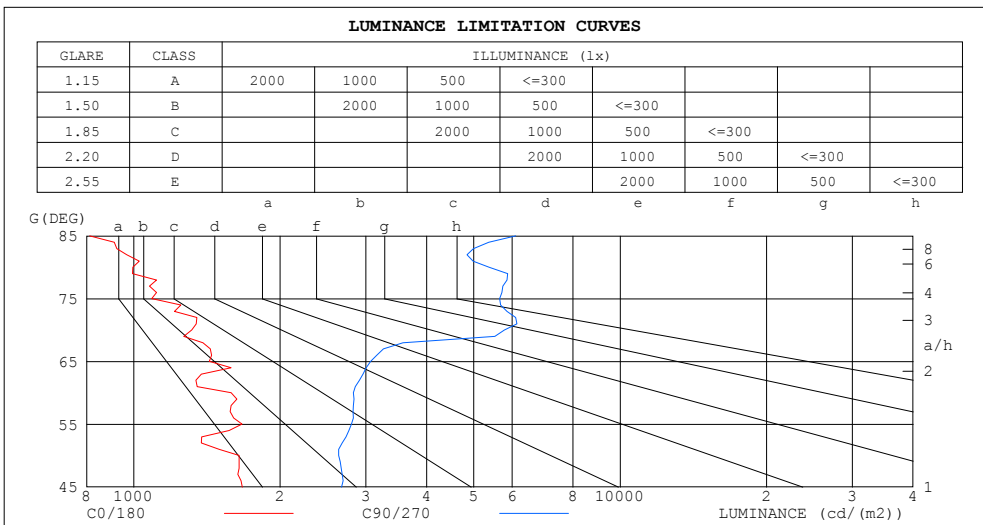

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	811	6097
80	996	5377
75	1089	5653
70	1317	5783
65	1430	3068
60	1586	2829
55	1670	2804
50	1646	2639
45	1672	2674


C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:songfucheng
 Test Date:2019-10-16

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:6.0000V I:280.00A P:1.6800W PF:1.0000 Freq:0Hz Lamp Flux:230.367x1 lm		
NAME: 600-021	TYPE:	WEIGHT:1
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:326*94mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	.00	.95	.90	.98	.93	.88	.93	.89	.85	.89	.85	.82	.85	.82	.80	.77
2.0	.85	.77	.71	.83	.76	.70	.79	.73	.68	.76	.71	.66	.72	.68	.64	.62
3.0	.74	.65	.57	.72	.64	.57	.69	.61	.55	.66	.59	.54	.63	.58	.53	.51
4.0	.65	.55	.48	.63	.54	.47	.61	.53	.46	.58	.51	.46	.56	.50	.45	.42
5.0	.58	.48	.40	.56	.47	.40	.54	.46	.40	.52	.45	.39	.50	.43	.38	.36
6.0	.52	.42	.35	.50	.41	.35	.48	.40	.34	.47	.39	.34	.45	.38	.33	.31
7.0	.47	.37	.31	.46	.37	.30	.44	.36	.30	.42	.35	.30	.41	.34	.29	.27
8.0	.42	.33	.27	.42	.33	.27	.40	.32	.27	.39	.32	.26	.37	.31	.26	.24
9.0	.39	.30	.24	.38	.30	.24	.37	.29	.24	.36	.29	.24	.34	.28	.23	.22
10.0	.36	.27	.22	.35	.27	.22	.34	.27	.22	.33	.26	.21	.32	.26	.21	.19

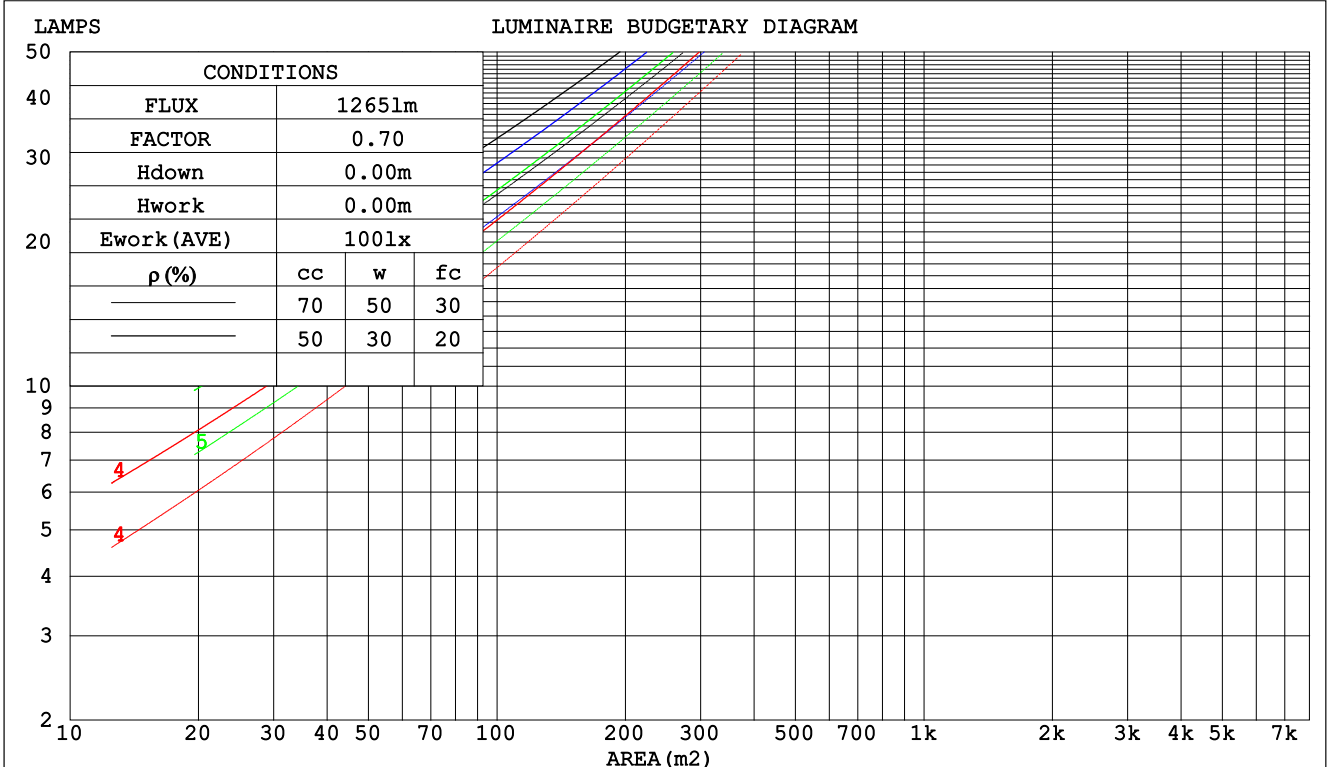

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:songfucheng
 Test Date:2019-10-16

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:6.0000V I:280.00A P:1.6800W PF:1.0000 Freq:0Hz Lamp Flux:230.367x1 lm														
NAME: 600-021					TYPE:					WEIGHT:1				
SPEC.:					DIM.:					SERIAL No.:				
MFR.:					SUR.:326*94mm					Shielding Angle:				

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.378	.215	.068	.370	.211	.067	.356	.204	.065	.343	.198	.063	.331	.192	.062	
2.0	.338	.185	.057	.331	.182	.056	.318	.177	.055	.306	.172	.054	.295	.167	.053	
3.0	.303	.161	.048	.297	.159	.048	.286	.155	.047	.275	.151	.046	.265	.147	.045	
4.0	.274	.142	.042	.268	.140	.042	.258	.137	.041	.249	.134	.040	.240	.130	.040	
5.0	.249	.127	.037	.244	.125	.037	.235	.123	.036	.227	.120	.036	.219	.117	.035	
6.0	.228	.115	.033	.224	.113	.033	.216	.111	.032	.209	.108	.032	.202	.106	.032	
7.0	.211	.104	.030	.207	.103	.029	.200	.101	.029	.193	.099	.029	.187	.097	.029	
8.0	.195	.096	.027	.192	.095	.027	.186	.093	.026	.180	.091	.026	.174	.089	.026	
9.0	.182	.088	.025	.179	.087	.024	.173	.086	.024	.168	.084	.024	.163	.083	.024	
10.0	.170	.082	.023	.168	.081	.023	.162	.080	.022	.157	.078	.022	.153	.077	.022	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.201	.201	.201	.172	.172	.172	.117	.117	.117	.067	.067	.067	.022	.022	.022	
1.0	.196	.166	.140	.167	.143	.120	.115	.098	.083	.066	.057	.048	.021	.018	.016	
2.0	.189	.142	.103	.162	.123	.089	.111	.085	.062	.064	.049	.036	.021	.016	.012	
3.0	.182	.125	.080	.156	.108	.070	.107	.075	.049	.062	.044	.029	.020	.014	.009	
4.0	.174	.112	.065	.149	.097	.057	.103	.068	.040	.059	.040	.024	.019	.013	.008	
5.0	.166	.102	.055	.142	.088	.048	.098	.062	.034	.057	.036	.020	.018	.012	.007	
6.0	.158	.094	.048	.136	.081	.042	.094	.057	.030	.054	.034	.018	.018	.011	.006	
7.0	.151	.087	.042	.130	.076	.037	.090	.053	.026	.052	.031	.016	.017	.010	.005	
8.0	.144	.081	.038	.124	.071	.033	.086	.050	.024	.050	.029	.014	.016	.010	.005	
9.0	.137	.076	.035	.118	.066	.031	.082	.047	.022	.048	.028	.013	.015	.009	.004	
10.0	.131	.072	.033	.113	.063	.028	.079	.044	.020	.046	.026	.012	.015	.009	.004	

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:songfucheng
 Test Date:2019-10-16

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:6.0000V I:280.00A P:1.6800W PF:1.0000 Freq:0Hz Lamp Flux:230.367x1 lm										
NAME: 600-021					TYPE:			WEIGHT:1		
SPEC.:					DIM.:			SERIAL No.:		
MFR.:					SUR.:326*94mm			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	14.2	15.8	14.5	16.1	16.3	16.9	18.5	17.2	18.7	19.0
3H	15.4	17.0	15.8	17.2	17.5	20.4	21.9	20.8	22.2	22.5
4H	15.9	17.4	16.3	17.6	17.9	22.3	23.8	22.7	24.1	24.4
6H	16.2	17.6	16.6	17.9	18.2	23.5	24.9	23.9	25.2	25.5
8H	16.4	17.7	16.7	18.0	18.3	23.8	25.2	24.2	25.5	25.8
12H	16.4	17.7	16.8	18.0	18.4	24.1	25.4	24.5	25.7	26.1
4H 2H	15.6	17.1	15.9	17.3	17.6	17.5	18.9	17.8	19.2	19.5
3H	17.1	18.4	17.5	18.7	19.1	21.4	22.7	21.8	23.0	23.4
4H	17.7	18.9	18.1	19.2	19.6	23.5	24.7	23.9	25.0	25.4
6H	18.1	19.2	18.5	19.6	20.0	24.9	26.0	25.3	26.3	26.7
8H	18.2	19.2	18.7	19.6	20.1	25.2	26.2	25.7	26.6	27.1
12H	18.4	19.3	18.8	19.7	20.1	25.6	26.5	26.0	26.9	27.4
8H 4H	19.6	20.6	20.1	21.0	21.5	23.9	24.9	24.3	25.3	25.7
6H	20.4	21.3	20.9	21.7	22.2	25.5	26.4	26.0	26.8	27.3
8H	20.7	21.5	21.2	21.9	22.4	26.0	26.8	26.5	27.2	27.7
12H	20.9	21.5	21.4	22.0	22.5	26.5	27.1	27.0	27.6	28.1
12H 4H	20.1	21.0	20.5	21.4	21.8	23.9	24.8	24.4	25.2	25.7
6H	21.1	21.9	21.6	22.3	22.8	25.6	26.4	26.1	26.8	27.3
8H	21.5	22.2	22.0	22.7	23.2	26.2	26.8	26.7	27.3	27.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.1 / - 0.2					+ 0.4 / - 0.7				
2.0H	+ 0.6 / - 1.1					+ 0.4 / - 0.6				

CIE Pub.117, 230.4 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -5.1)

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:songfucheng
 Test Date:2019-10-16

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:6.0000V I:280.00A P:1.6800W PF:1.0000 Freq:0Hz Lamp Flux:230.367x1 lm		
NAME: 600-021	TYPE:	WEIGHT:1
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:326*94mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	53	41	33	52	40	33	51	40	33	26
0.80	62	50	42	61	49	41	59	48	41	34
1.00	70	58	50	69	57	50	67	59	49	41
1.25	77	65	57	76	65	57	73	63	56	48
1.50	83	71	63	81	70	63	77	68	61	53
2.00	90	80	72	88	78	71	84	76	70	61
2.50	94	85	78	92	83	77	88	81	75	66
3.00	98	90	83	96	88	82	91	85	80	70
4.00	103	96	90	100	94	88	95	90	86	76
5.00	105	99	94	103	97	93	98	93	89	79
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:songfucheng
 Test Date:2019-10-16

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:6.0000V I:280.00A P:1.6800W PF:1.0000 Freq:0Hz Lamp Flux:230.367x1 lm		
NAME: 600-021	TYPE:	WEIGHT:1
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:326*94mm	Shielding Angle:

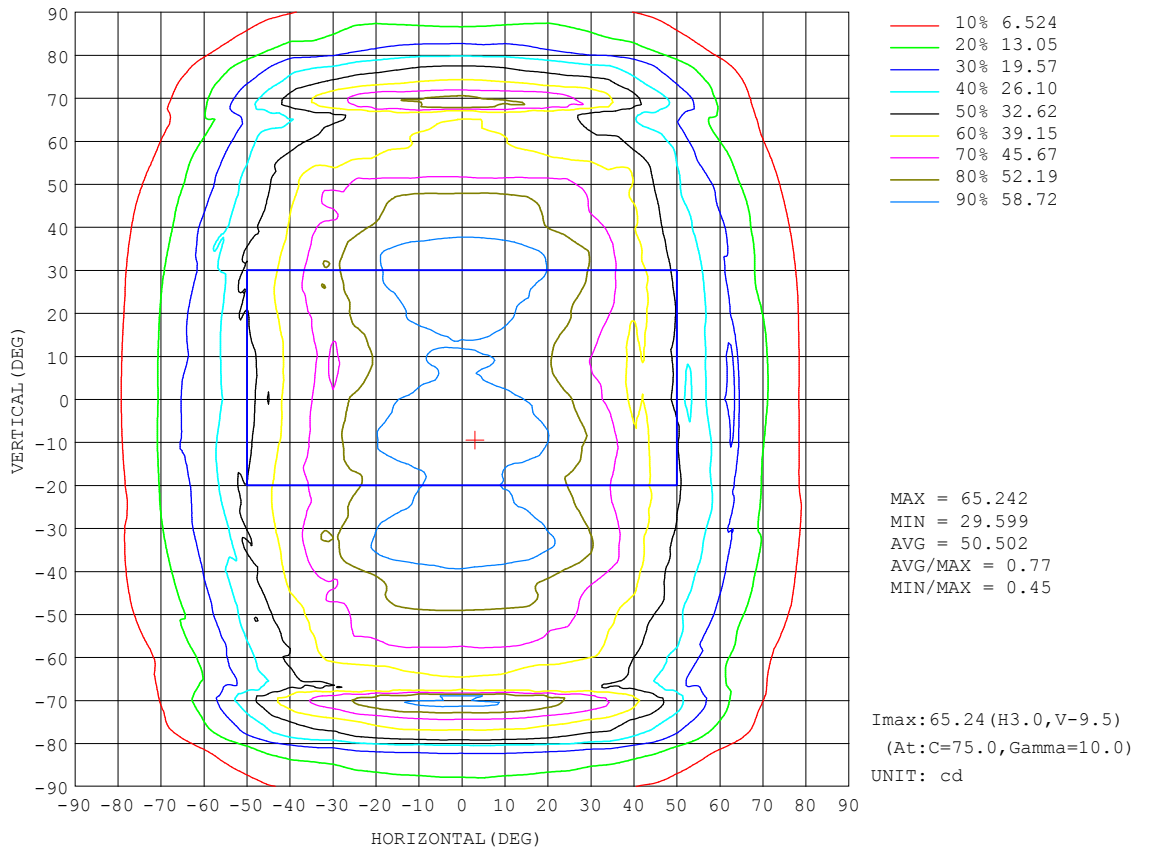


C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:songfucheng
 Test Date:2019-10-16

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

AAI Figure

Test:U:6.0000V I:280.00A P:1.6800W PF:1.0000 Freq:0Hz Lamp Flux:230.367x1 lm		
NAME: 600-021	TYPE:	WEIGHT:1
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:326*94mm	Shielding Angle:

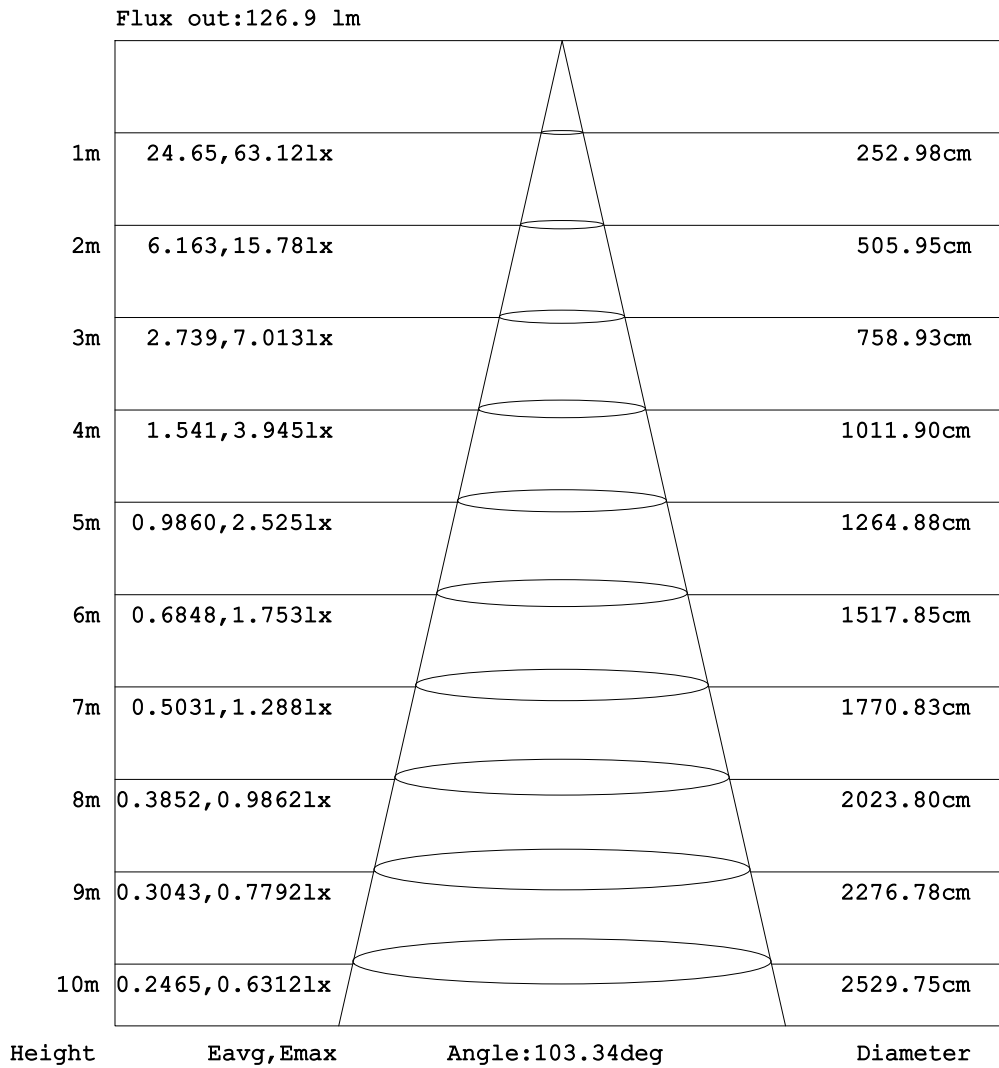


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:songfucheng
 Test Date:2019-10-16

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:6.0000V I:280.00A P:1.6800W PF:1.0000 Freq:0Hz Lamp Flux:230.367x1 lm		
NAME: 600-021	TYPE:	WEIGHT:1
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:326*94mm	Shielding Angle:

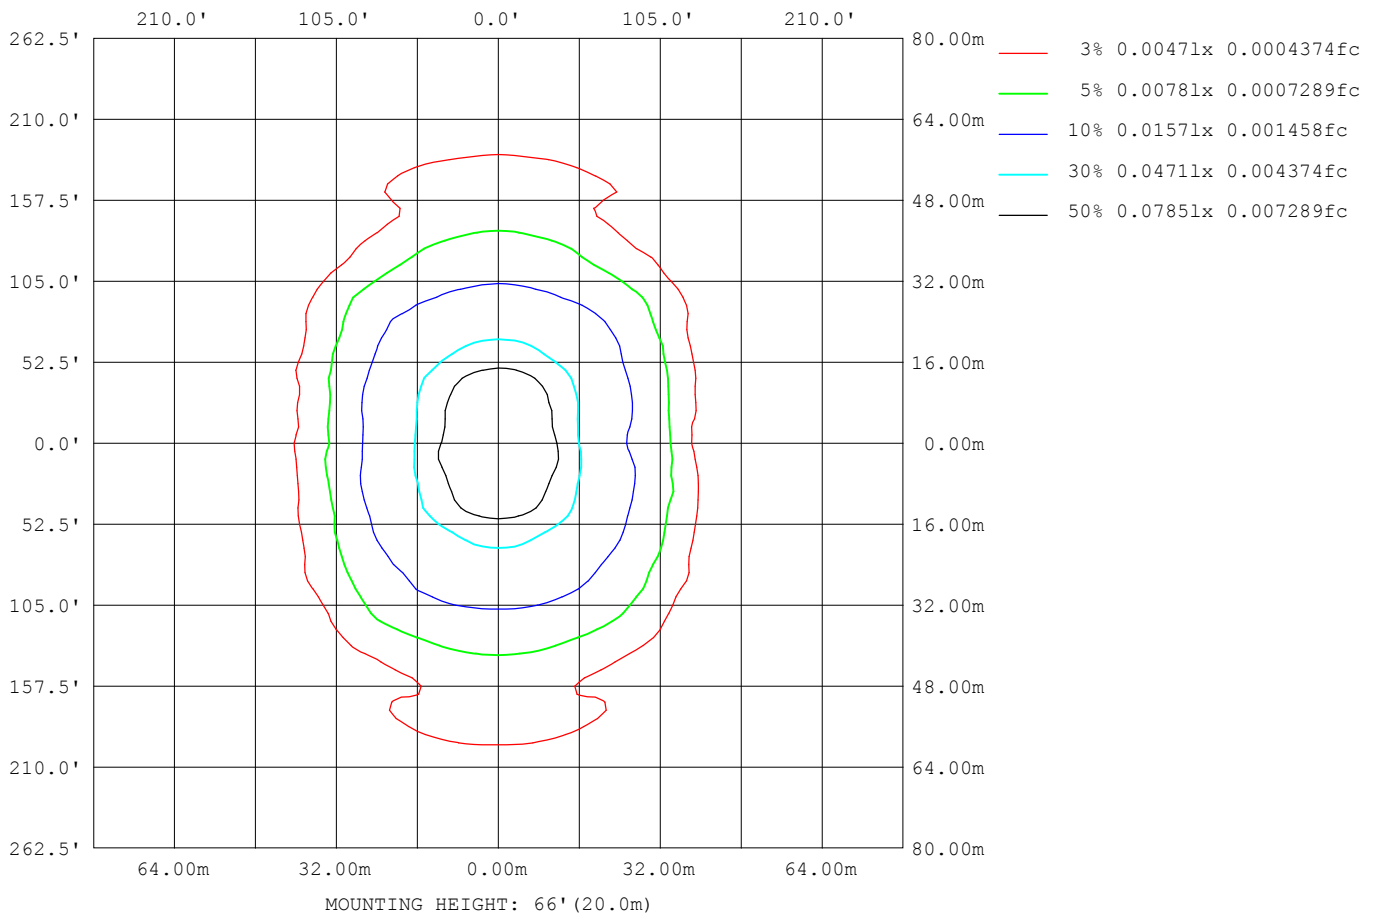

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:songfucheng
 Test Date:2019-10-16

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:6.0000V I:280.00A P:1.6800W PF:1.0000 Freq:0Hz Lamp Flux:230.367x1 lm		
NAME: 600-021	TYPE:	WEIGHT:1
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:326*94mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1513
L_0~180 (75) av	1140
L_0~180 (85) av	804
L_90~270 (65) av	3084
L_90~270 (75) av	5260
L_90~270 (85) av	6027
L_45 (65) av	2713
L_45 (75) av	4454
L_45 (85) av	4506

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:songfucheng
 Test Date:2019-10-16

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

Planar Illuminance Curve

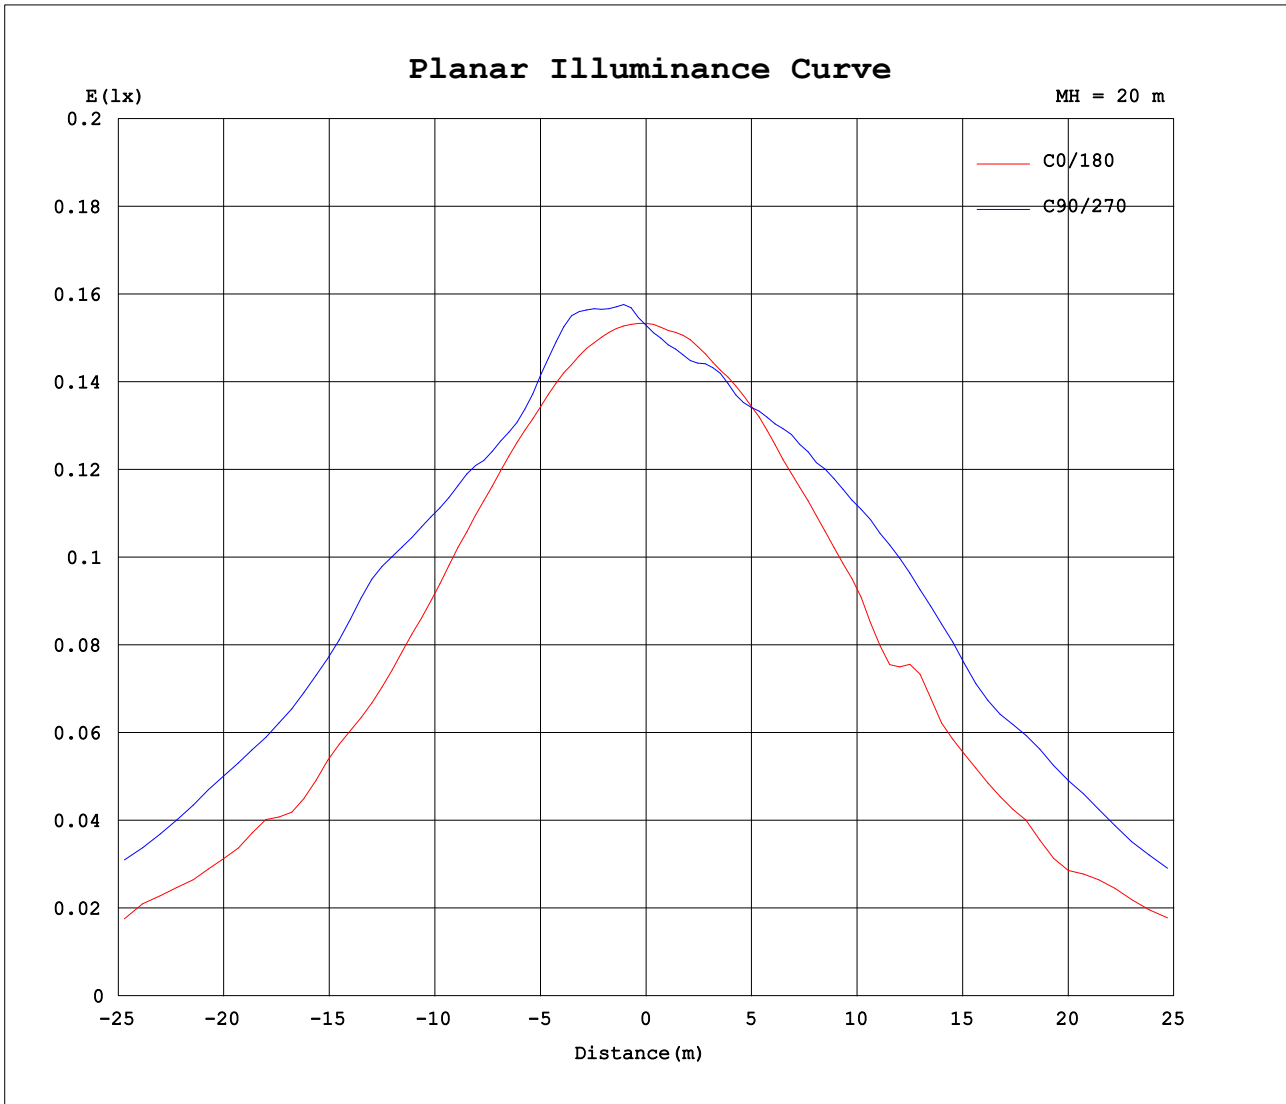

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:songfucheng
 Test Date:2019-10-16

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:6.0000V I:280.00A P:1.6800W PF:1.0000 Freq:0Hz Lamp Flux:230.367x1 lm		
NAME: 600-021	TYPE:	WEIGHT:1
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:326*94mm	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
0	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2
5	61.1	61.2	61.6	61.8	62.3	62.6	62.8	63.0	63.2	63.3	63.4	63.3	63.4	63.4	63.4	63.4	63.4	63.5	63.5
10	60.2	60.5	61.0	61.0	61.4	62.0	62.7	63.0	63.3	63.4	63.7	64.1	64.5	64.9	65.3	65.3	65.2	65.0	65.0
15	58.3	59.1	59.6	59.8	61.0	61.6	62.2	62.5	63.2	63.6	63.5	62.8	61.9	61.5	61.1	61.0	61.0	61.1	61.0
20	55.9	56.6	57.1	58.0	59.5	60.0	60.2	60.3	59.7	58.9	58.1	58.1	58.6	58.9	59.3	59.5	59.7	59.9	59.9
25	52.7	53.1	54.3	55.7	56.3	56.9	56.6	56.1	55.2	55.3	56.5	57.6	58.5	59.3	60.1	60.7	60.9	61.2	61.1
30	48.3	49.4	50.7	52.2	52.0	52.7	52.5	51.9	53.4	55.0	56.5	57.4	59.7	61.1	61.8	62.2	62.5	62.8	63.1
35	44.0	45.3	46.4	47.8	48.1	49.1	48.5	50.0	52.3	54.3	56.8	58.8	60.1	61.9	63.0	62.8	62.8	62.4	62.6
40	37.2	38.7	39.9	42.1	44.4	44.8	46.1	48.8	51.5	54.1	57.3	58.5	58.5	58.8	58.3	57.9	57.7	58.2	58.4
45	35.4	36.4	37.3	40.3	43.3	41.1	43.2	47.1	49.9	52.4	53.0	52.4	52.6	52.5	53.9	55.2	56.4	56.9	56.8
50	31.7	33.1	33.8	35.9	38.0	38.7	40.9	43.0	46.2	46.4	46.7	47.0	49.5	51.3	52.3	51.5	51.1	51.0	50.9
55	28.7	28.5	30.4	31.6	32.3	34.2	35.9	38.6	41.0	41.3	42.3	44.8	46.9	46.6	47.0	47.7	48.5	48.7	48.3
60	23.7	25.0	24.8	28.3	27.5	30.0	30.9	34.4	35.7	38.5	39.4	42.4	43.3	43.2	43.5	43.2	42.4	42.5	42.5
65	18.1	19.4	19.3	20.6	22.0	24.5	26.7	30.5	31.4	34.7	36.8	38.5	38.2	37.8	37.4	38.3	38.6	38.7	38.9
70	13.5	13.4	13.8	16.6	17.6	20.1	21.9	26.0	26.4	30.0	33.9	32.7	33.2	39.3	54.4	56.9	57.5	58.0	59.4
75	8.44	10.1	10.4	11.8	12.4	14.6	16.9	19.4	24.7	37.1	42.7	45.1	44.6	44.3	43.6	44.2	44.0	43.9	43.9
80	5.18	6.61	7.06	7.21	8.02	12.3	17.9	21.5	24.1	27.3	28.5	31.1	30.7	30.7	30.6	29.7	28.8	29.2	28.0
85	2.12	3.37	3.41	4.10	5.73	7.32	8.10	9.11	10.4	12.4	13.3	14.1	14.3	15.1	15.4	15.7	15.8	16.0	16.0
90	0.79	0.57	0.81	1.05	1.40	1.88	2.65	3.54	4.36	5.78	6.61	7.59	8.09	9.31	9.41	10.4	10.8	11.2	11.2
95	0.81	1.03	1.41	1.69	1.38	1.16	1.20	1.21	1.26	1.17	1.16	1.82	2.29	3.22	3.86	4.84	5.13	5.49	5.43
100	1.34	1.36	1.45	1.39	1.18	0.87	0.60	0.38	0.28	0.24	0.49	0.84	1.29	1.87	2.76	3.27	3.86	3.98	3.90
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:songfucheng
 Test Date:2019-10-16

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:6.0000V I:280.00A P:1.6800W PF:1.0000 Freq:0Hz Lamp Flux:230.367x1 lm		
NAME: 600-021	TYPE:	WEIGHT:1
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:326*94mm	Shielding Angle:

Table--2

UNIT: cd

C (DEG) γ (DEG)	95	100	105	110	115	120	125	130	135	140	145	150	155	160	165	170	175	180	185
0	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2
5	63.6	63.6	63.7	63.7	63.7	63.6	63.6	63.4	63.2	63.1	62.9	62.8	62.4	62.0	61.7	61.3	61.0	60.8	60.5
10	65.0	64.9	64.9	64.8	64.7	64.3	64.1	63.9	63.8	63.5	63.2	62.7	62.3	62.1	61.6	61.0	60.2	59.7	59.2
15	61.3	61.5	61.7	61.5	61.6	62.0	62.7	63.2	63.2	62.9	62.6	62.4	61.7	60.9	59.7	59.5	59.2	58.5	57.5
20	59.7	59.6	59.5	59.3	58.8	58.1	58.2	58.3	58.9	59.9	60.4	60.4	59.6	59.3	57.9	56.8	56.5	55.8	54.7
25	61.0	60.7	60.1	59.5	59.0	58.5	57.4	56.0	55.5	55.0	55.3	56.4	56.4	55.9	55.8	53.8	53.1	52.9	51.6
30	63.4	63.2	62.6	61.8	60.5	59.1	57.0	55.6	54.3	52.9	51.4	52.6	53.1	51.3	50.3	48.3	47.3	46.5	45.2
35	62.5	62.5	62.8	63.0	61.9	60.4	59.2	56.1	53.9	52.5	48.9	46.2	49.5	51.8	49.4	47.7	46.3	45.2	44.4
40	58.2	58.0	57.9	58.2	59.0	59.3	58.6	56.5	54.4	48.5	51.7	47.8	45.7	45.6	43.7	42.1	41.0	40.4	40.1
45	56.8	56.4	55.3	53.9	52.7	52.1	52.4	53.1	50.5	52.1	46.9	44.5	42.5	41.4	39.4	36.9	33.3	32.4	32.9
50	51.2	51.3	51.8	52.2	51.2	49.0	47.6	45.3	47.9	45.5	43.4	40.7	39.1	37.7	35.4	32.6	30.6	29.5	29.9
55	48.9	48.5	48.2	47.5	47.3	47.3	43.9	45.0	40.9	41.3	38.5	35.8	34.2	33.0	32.5	29.1	27.3	26.4	27.1
60	42.5	42.4	43.9	44.7	44.2	45.0	41.8	40.1	38.0	36.6	33.6	32.3	27.0	25.8	24.8	24.3	25.1	23.2	23.5
65	38.7	38.5	38.4	37.9	38.1	38.9	39.8	37.0	35.2	30.0	33.2	27.4	24.6	22.8	21.2	19.4	19.7	20.3	18.8
70	58.6	57.7	56.6	54.2	39.5	32.4	32.0	34.0	30.4	28.1	24.9	22.3	19.2	17.0	14.7	15.2	15.6	15.3	14.9
75	44.1	44.1	43.8	43.4	44.4	44.0	43.5	43.9	38.8	24.5	19.7	16.7	14.3	13.3	11.0	11.0	9.64	9.26	9.57
80	28.3	28.1	29.9	30.3	30.7	29.5	30.8	30.0	27.7	24.8	21.7	17.5	11.8	8.10	7.43	7.19	6.40	5.58	6.39
85	15.9	15.7	15.5	15.3	14.8	13.8	13.4	13.4	12.5	10.8	9.26	8.14	7.34	6.24	4.03	3.53	3.38	2.09	3.12
90	11.2	10.7	10.4	9.95	9.36	8.10	7.50	7.04	6.29	4.89	3.72	2.66	1.90	1.41	1.09	0.89	0.61	0.79	0.66
95	5.51	5.14	5.02	4.21	3.69	2.72	2.10	1.64	1.70	1.76	1.58	1.61	1.52	1.75	1.97	1.55	1.10	0.94	1.08
100	3.96	3.62	3.10	2.70	2.13	1.47	1.15	0.82	0.68	0.77	0.83	1.13	1.38	1.77	1.85	1.89	1.73	1.66	1.73
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:songfucheng
 Test Date:2019-10-16

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:6.0000V I:280.00A P:1.6800W PF:1.0000 Freq:0Hz Lamp Flux:230.367x1 lm		
NAME: 600-021	TYPE:	WEIGHT:1
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:326*94mm	Shielding Angle:

Table--3

UNIT: cd

C (DEG) γ (DEG)	190	195	200	205	210	215	220	225	230	235	240	245	250	255	260	265	270	275	280
0	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2
5	60.2	60.0	59.8	59.7	59.6	59.5	59.4	59.5	59.6	59.7	59.7	59.5	59.4	59.3	59.3	59.2	59.2	59.2	59.2
10	59.1	58.8	58.6	58.1	57.8	57.8	58.1	58.4	58.7	59.0	59.4	59.6	59.7	59.7	59.6	59.6	59.5	59.5	59.4
15	56.4	56.0	56.1	56.2	56.8	57.0	57.4	57.5	57.6	57.5	57.5	57.8	58.3	58.6	59.0	59.0	59.2	59.4	59.4
20	54.1	53.8	53.6	54.0	54.4	54.6	55.3	56.0	56.7	57.7	59.1	59.9	60.6	60.7	60.7	60.6	60.7	60.5	60.5
25	50.5	49.9	50.2	51.4	52.4	53.6	55.4	56.6	57.4	58.3	59.4	60.2	61.1	61.8	62.3	62.2	62.2	62.1	62.2
30	44.8	44.9	47.3	49.1	51.6	52.9	54.0	55.5	57.3	58.7	59.8	60.5	61.9	62.6	62.9	63.1	63.4	63.4	63.3
35	45.2	45.5	48.9	48.1	47.2	49.4	53.2	54.7	57.3	58.3	59.6	61.3	61.8	61.8	62.0	61.6	61.8	62.3	62.2
40	40.9	41.3	43.4	45.3	48.5	52.3	49.5	54.6	55.7	56.1	57.5	56.7	56.8	56.7	57.2	57.5	57.2	56.9	56.4
45	36.4	38.0	40.1	43.0	45.2	46.6	50.6	49.3	50.8	51.6	52.0	52.9	54.1	55.0	55.5	55.5	55.7	55.7	55.7
50	31.8	35.6	36.5	38.7	40.3	42.4	44.6	46.5	44.9	48.2	49.3	50.8	50.8	50.3	49.1	48.3	48.5	48.5	48.9
55	28.1	31.3	32.6	33.7	35.7	37.1	40.4	41.9	46.7	44.6	46.3	43.5	42.8	42.3	41.9	41.5	41.3	41.8	41.8
60	23.6	24.1	26.6	27.3	30.7	33.0	37.2	39.2	40.9	38.0	38.6	38.1	38.8	38.8	39.9	40.4	40.6	40.1	39.5
65	20.4	20.3	24.1	24.3	26.7	32.3	32.5	33.6	34.2	34.1	34.7	36.1	37.3	37.6	38.3	38.9	39.3	39.2	38.1
70	14.8	15.4	17.1	18.6	22.6	24.5	27.9	26.5	27.4	28.7	37.9	47.2	50.3	52.3	52.4	53.6	53.9	52.1	52.2
75	10.5	10.6	12.3	14.0	15.2	17.7	26.3	31.5	35.7	35.9	36.4	37.0	36.8	36.8	37.0	37.6	37.7	37.5	36.9
80	6.54	6.38	6.88	10.1	13.2	16.6	18.8	21.5	24.6	24.2	23.4	24.4	24.5	25.0	25.4	25.1	25.4	25.0	25.3
85	2.89	3.09	4.39	5.22	6.20	7.52	9.09	11.2	12.7	12.3	13.6	15.1	16.2	16.4	15.9	15.8	15.6	15.9	16.4
90	0.85	0.97	1.08	1.41	1.99	2.84	4.02	5.35	6.22	7.24	8.59	10.0	10.00	9.62	9.51	9.35	9.39	9.46	9.66
95	1.73	1.90	1.63	1.43	1.35	1.35	1.23	1.25	1.76	2.73	3.85	4.62	4.91	5.04	5.19	5.21	5.17	5.13	5.08
100	1.83	1.90	1.63	1.26	0.95	0.70	0.59	0.59	0.83	1.32	1.54	2.08	2.25	2.44	2.63	2.67	2.74	2.75	2.87
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:songfucheng
 Test Date:2019-10-16

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:6.0000V I:280.00A P:1.6800W PF:1.0000 Freq:0Hz Lamp Flux:230.367x1 lm		
NAME: 600-021	TYPE:	WEIGHT:1
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:326*94mm	Shielding Angle:

Table--4

UNIT: cd

C (DEG) \ γ (DEG)	285	290	295	300	305	310	315	320	325	330	335	340	345	350	355				
0	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2				
5	59.2	59.2	59.2	59.3	59.3	59.3	59.4	59.4	59.5	59.7	59.9	60.0	60.2	60.4	60.7				
10	59.4	59.4	59.3	59.2	59.0	58.8	58.5	58.1	57.9	57.8	57.8	58.2	58.7	59.3	59.6				
15	59.2	58.7	58.1	57.8	57.5	57.4	57.4	57.3	56.8	56.5	56.2	56.1	56.5	56.7	57.4				
20	60.3	59.9	59.3	59.0	58.3	57.3	56.3	55.5	54.7	54.6	54.0	53.6	53.4	53.8	54.5				
25	61.8	61.2	60.1	59.0	58.2	57.6	56.6	55.2	53.5	52.3	51.2	50.5	50.0	50.3	51.3				
30	63.1	62.5	61.1	59.8	58.4	57.5	55.4	53.9	53.1	50.7	49.0	47.4	46.2	46.5	47.6				
35	61.8	61.6	61.3	60.5	59.1	57.5	55.7	53.0	50.7	49.3	46.7	44.9	43.0	42.4	42.9				
40	56.1	56.5	56.6	57.1	56.7	56.1	54.2	51.8	48.8	47.0	44.6	41.9	38.9	37.8	36.7				
45	55.2	54.4	53.2	51.0	51.2	51.0	51.3	48.9	46.0	43.3	41.3	41.8	38.1	36.3	35.7				
50	49.9	51.1	50.8	50.3	47.9	46.6	45.9	44.7	41.2	41.1	38.2	36.4	34.3	32.4	32.3				
55	42.0	42.6	44.0	46.0	45.2	43.9	41.7	42.8	36.5	34.4	33.0	31.4	29.9	28.7	29.2				
60	38.7	38.2	38.1	38.3	39.6	39.5	41.8	36.2	33.2	30.2	30.8	27.6	25.7	23.9	23.8				
65	37.5	37.3	35.4	33.6	33.8	34.6	34.0	32.5	29.5	25.2	23.4	20.7	19.6	19.0	18.2				
70	51.9	50.2	49.0	35.6	29.5	28.6	27.4	27.8	25.5	21.1	19.9	17.3	14.5	13.6	13.0				
75	36.4	36.9	36.7	37.5	37.8	35.5	30.9	25.5	17.0	14.5	13.6	11.9	10.4	9.90	9.11				
80	24.7	24.4	24.3	24.2	25.4	24.2	21.5	19.1	17.2	13.1	9.72	6.93	6.54	6.07	6.05				
85	16.4	16.2	14.9	14.0	13.0	12.5	11.0	9.04	7.46	6.04	5.14	4.24	3.05	2.69	3.06				
90	9.78	10.1	10.0	9.01	7.43	6.46	5.61	4.10	2.95	1.99	1.40	1.02	0.85	0.69	0.61				
95	4.91	4.72	4.19	3.65	2.42	1.40	0.92	0.95	1.04	1.04	1.12	1.37	1.60	1.49	0.95				
100	2.71	2.42	1.81	1.36	1.10	0.62	0.29	0.25	0.43	0.60	0.96	1.19	1.42	1.43	1.40				
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:songfucheng
 Test Date:2019-10-16

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks: