

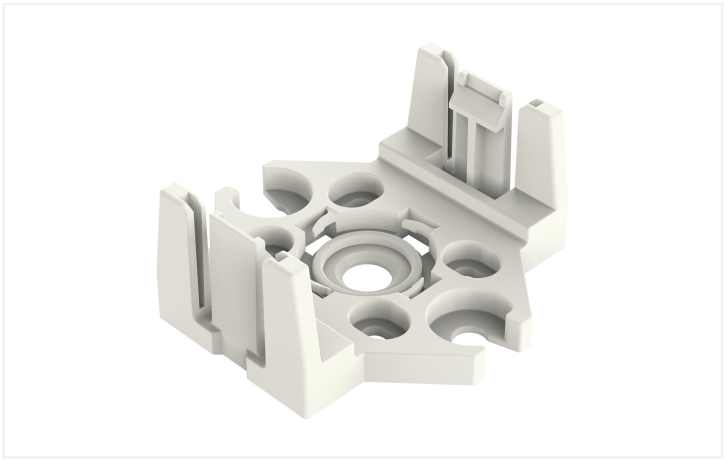


Color: white

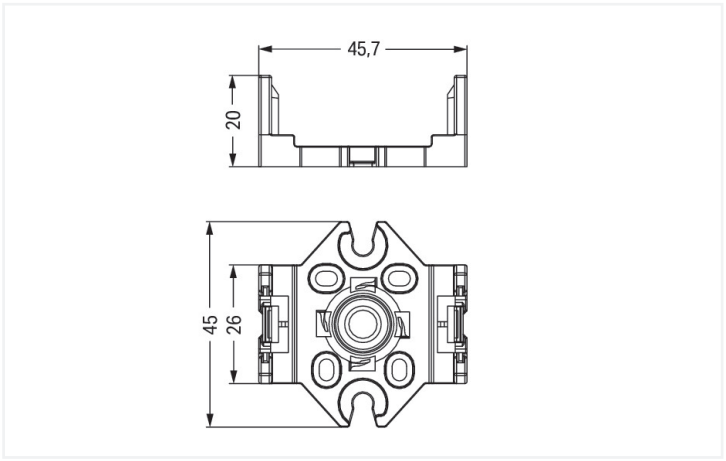

Dimensions in mm

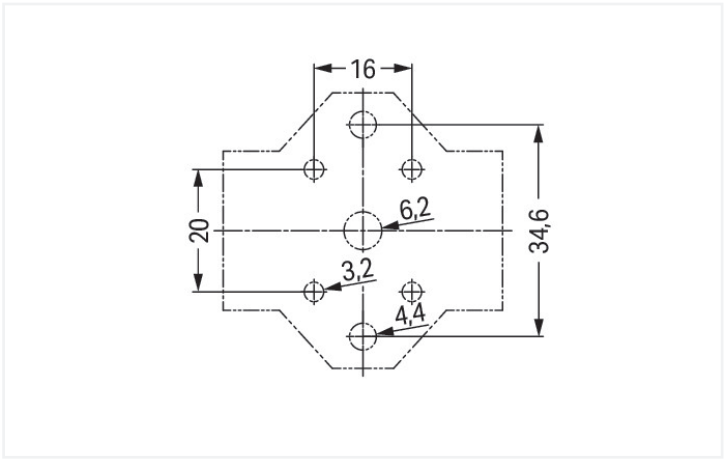

Dimensions in mm

Mounting accessories *WINSTA*® MIDI 4-pole

Implement the energy supply effortlessly: The mounting accessories from the *WINSTA*® MIDI product line is the solution for quick, straightforward installation. You can rely on the quality of WINSTA® components from WAGO for your electrical installation accessories too. *WINSTA*® MIDI with Push-in CAGE CLAMP® spring pressure connection technology is used in a broad range of individual products you can use for quick, easy, secure, tailored installation.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

The WINSTA® Pluggable Connection System allows pluggable electrical installation. This significantly reduces the need for servicing and lowers costs. Enjoy the benefits of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with protection against mismating from WAGO.

- simple circuits
- convenient installation and commissioning

Notes

General safety information	**NOTICE: Observe installation and safety instructions!** • Nur von Elektrofachkraft oder einer für die Tätigkeit elektrisch unterwiesenen Person (EUP nach DIN VDE 0105-100) anzuwenden! • Nicht unter Spannung/Last installieren! • Nur für bestimmungsgemäßen Gebrauch einsetzen! • Nationale Vorschriften/Normen/Richtlinien beachten! • Technische Daten der Produkte beachten! • Auf die richtige Polbelegung achten! • Keine beschädigten/verschmutzten Komponenten verwenden! • Leiterarten, -querschnitte, Abisolierlängen und Leitungsdurchmesser beachten! • Leiter bis zum Anschlag einführen! • Nur mit Verriegelungsklinke und Zugentlastung verwenden! • Originalzubehör verwenden! **To be sold only with installation instructions!**

Connection Data

Connection 1

Pole number	4

Mechanical data

Mounting type	Screw mount
Suitable	for distribution connectors (except T-distribution connectors); 4-pole

Material data

Note (material data)	Information on material specifications can be found here
Color	white
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.184 MJ
Weight	6.1 g

Environmental requirements

Processing temperature	-5 … +40 °C
Continuous operating temperature	-35 … +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data

Product Group	20 (Winsta)
PU (SPU)	25 pcs
Packaging type	Box
Country of origin	DE
GTIN	4044918451437
Customs tariff number	39269097900

Continued on next page

Product Classification

UNSPSC	39121321
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 9.0	EC002863
ETIM 10.0	EC002863
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 770-674

Documentation

Bid Text

770-674	19.02.2019	xml 2.55 KB
770-674	13.01.2015	doc 22.50 KB

CAD/CAE-Data

CAD data

2D/3D Models 770-674

CAE data

WSCAD Universe 770-674

ZUKEN Portal 770-674

1 Compatible Products

1.1 Optional Accessories

1.1.1 Installation

1.1.1.1 Mounting accessories



Item No.: 890-601
Fixing pin; 5 mm Ø, for 1.5 … 2.5 mm mounting plates; Plastic; black



Item No.: 770-601
Fixing pin; 6 mm Ø, for 2.5 … 4.0 mm mounting plates; Plastic; black