

TRONIX

guided by light

SPECIFICATION





Introduction

This LED Exit Sign is compact and decorative design with high luminance performance. It is suitable for various mounting way such as ceiling, wall, track, recessed, pendant and side mounting. LED self-contained luminaire with manual test and auto test optional. Replaceable pictogram design, including arrow right, left, down, up. Pictogram inserts all in one package.

Features


1. Compact and decorative design.
2. Single and double face universal, replaceable pictogram design.
3. Ceiling, wall, track ,recessed, pendant and side mounting.
4. LiFePO4 battery, long life time.
6. View distance: 25m

Application Areas


It is designed for emergency lighting applications in office, supermarket, shop, school, hotel, etc. It is also widely used for public areas, such as stairway, lobby, reception, corridors etc.

Pictogram

25M Pictogram

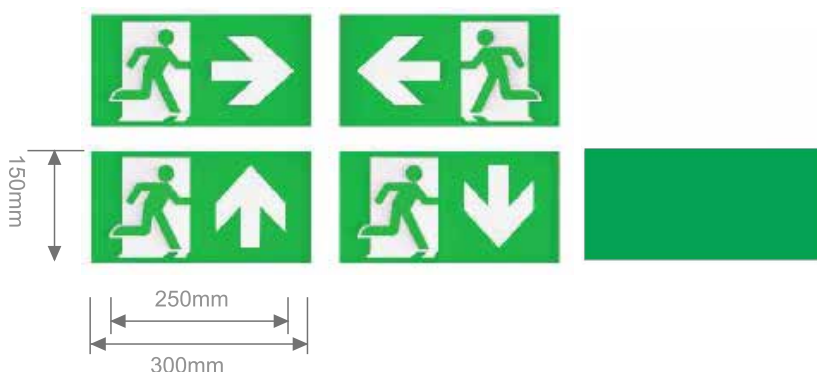

Product size

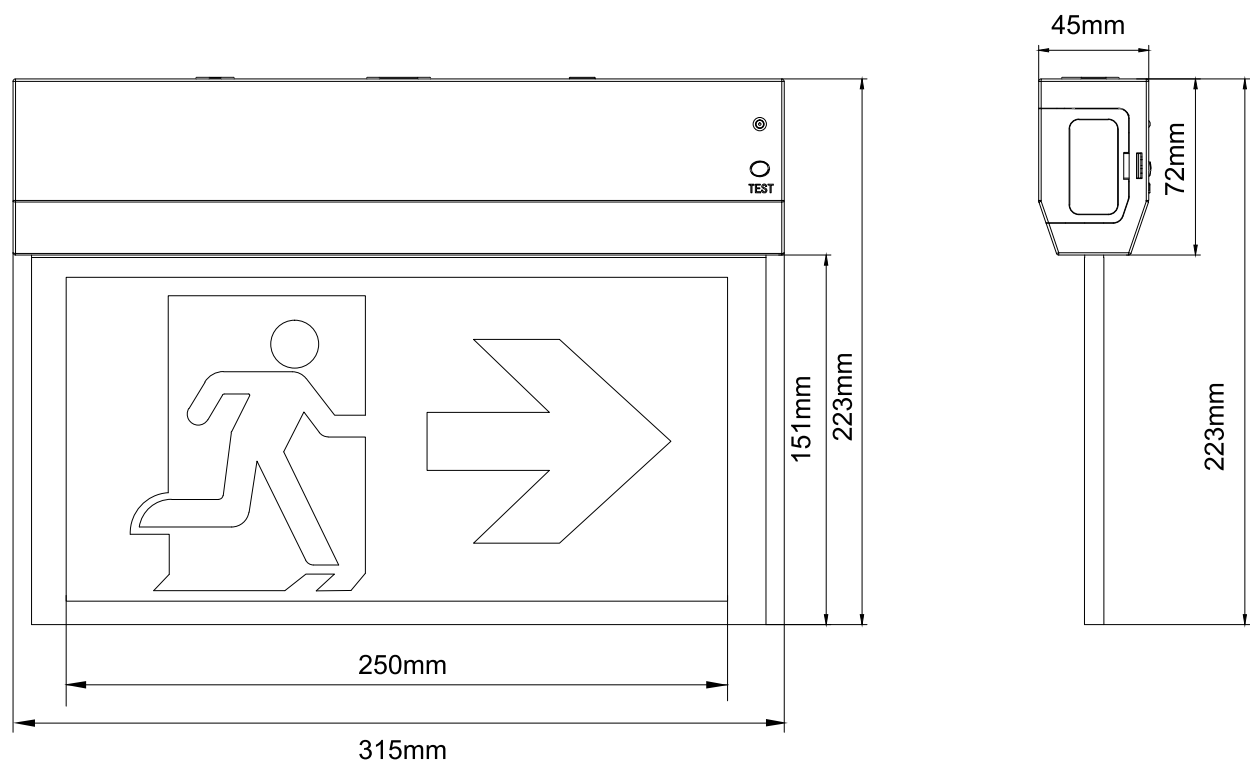

Driver Data sheet

Model	600-022
Output power	1W max
Frequency	50/60Hz
Input Voltage	220-240V
Efficiency	≥80%
Total load wattage	3W±0.5W
Power Factor	≥0.3
Rated Input Current	≤0.15A
Full load output voltage	DC12V
Output current range	60mA±10%
Short circuit protection	PASS
Over voltage protection	PASS
Over temperature protection	PASS
Surge	0.5KV
Withstand voltage	AC3750V

Technical Data Sheet

Model No.	600-022
Input Voltage(V)	220-240V
LED	SMD 2835
CCT(K)	5000K
CRI	>70
LED Driver	Built-in
Protection Class	Class II
IP Rating	IP20
IK Rating	-
Finishing color	White
Material	ABS
Glow wire test (°C)	COVER:850 C
Operating Temp.(°C)	0 C ~45 C
Storage Temp.(°C)	0 C ~65 C

Installation mode



Ceiling / Wall mounting
600-022



Side mounting
600-022



Pendant mounting
600-022 + 600-031



Recessed mounting
600-022 + 600-030



Track mounting
600-022 + 169-037