


START Downlight Flat IP44 Dimmable 155mm Round Recessed

Start Downlight Flat 157 IP44 1000LM 830 DIM
0054120

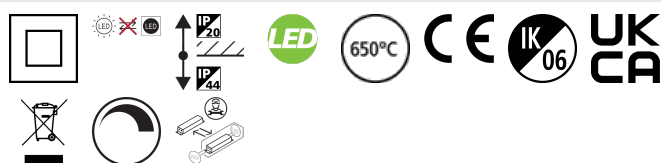

PRODUCT OVERVIEW

Product name	Start Downlight Flat 157 IP44 1000LM 830 DIM
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
E-number FI	4278493
Warranty	5 years
Fixture luminous flux (lm)	1000
Luminaire efficacy (lm/W)	83
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	12
Electrical protection	Class II
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK06
Product EAN number	5410288541204

PHOTOMETRY


START Downlight Flat IP44 Dimmable 155mm Round Recessed

Start Downlight Flat 157 IP44 1000LM 830 DIM
0054120

0.5	1.43	E07	1442
	1.43	E(C90)	138
		E(C0)	138
1.0	2.87	E07	361
	2.86	E(C90)	34
		E(C0)	34
1.5	4.30	E07	160
	4.28	E(C90)	15
		E(C0)	15
2.0	5.73	E07	90
	5.71	E(C90)	8
		E(C0)	8
2.5	7.17	E07	58
	7.14	E(C90)	5
		E(C0)	5
3.0	8.60	E07	42
	8.57	E(C90)	4
		E(C0)	4

Distance [m] Core diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 110.2°)
 — C90 - C270 (Half beam angle: 110.2°)

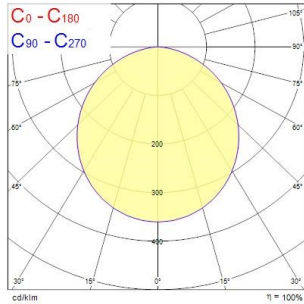

TECHNICAL DRAWINGS

