


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:3.750V I:0.6002A P:2.251W PF:1.000 Lamp Flux:233.095x1 lm		
NAME: 600-023 (Oval Lens)	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:1
MFR.:	SUR.:0.0002	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 103.55 lm/W			
MODEL	600-023 (Oval Lens)	I _{max} (cd)	305.1	S/MH(C0/180)	3.04
NOMINAL POWER(W)	2	LOR(%)	100.0	S/MH(C90/270)	0.92
RATED VOLTAGE(V)	4	TOTAL FLUX(lm)	233.10	η UP, DN(C0-180)	0.0, 42.5
NOMINAL FLUX(lm)	233.095	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0, 57.5
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE(V)	3.8	η down(%)	100.0	CIBSE SHR MAX	1.15

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

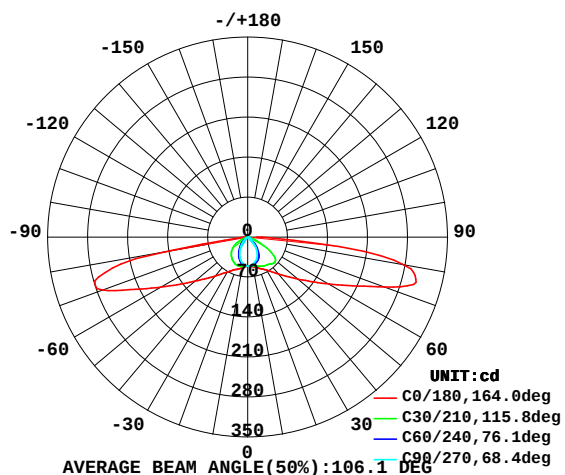

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

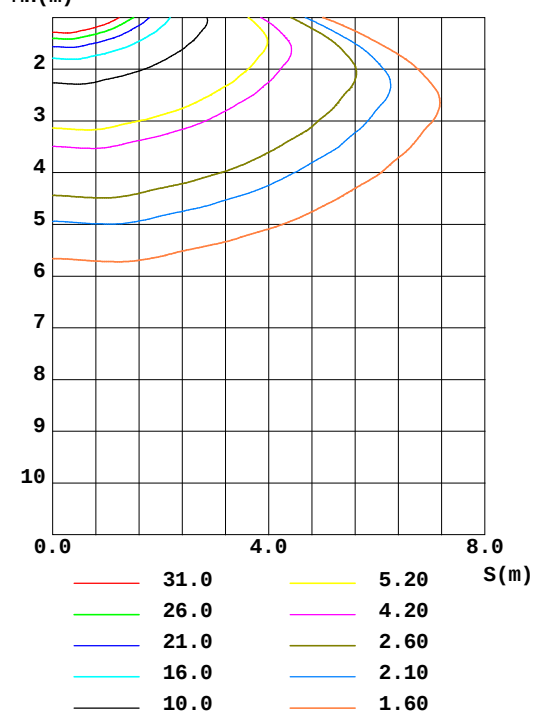

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2019-01-10

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.276
 Humidity: 65.0%
 Test Distance: 9.443m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	ϕ zone	ϕ total	%lum, lamp
10	54.59	50.90	47.74	49.67	52.58	51.20	49.40	52.44	0- 10	4.881	4.881	2.09, 2.09
20	60.52	46.76	39.31	45.85	58.03	49.50	43.53	51.47	10- 20	14.26	19.14	8.21, 8.21
30	70.62	38.54	27.40	39.12	67.10	47.88	34.36	48.06	20- 30	22.27	41.41	17.8, 17.8
40	89.31	27.94	16.50	30.14	84.62	41.65	20.94	40.46	30- 40	28.42	69.83	30, 30
50	120.0	18.90	8.015	20.73	114.3	26.94	8.884	25.09	40- 50	32.97	102.8	44.1, 44.1
60	174.8	8.825	3.045	9.535	164.6	10.49	3.723	8.966	50- 60	36.97	139.8	60, 60
70	271.1	1.573	0.8131	1.623	256.4	1.916	1.446	1.662	60- 70	40.94	180.7	77.5, 77.5
80	136.6	0.5262	0	0.6110	275.5	0.8157	0.2881	0.7695	70- 80	40.06	220.8	94.7, 94.7
90	2.887	0	0	0	15.12	0.0419	0	0.0389	80- 90	12.33	233.1	100, 100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2019-01-10

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.276
 Humidity: 65.0%
 Test Distance: 9.443m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:3.750V I:0.6002A P:2.251W PF:1.000 Lamp Flux:233.095x1 lm		
NAME: 600-023 (Oval Lens)	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:1
MFR.:	SUR.:0.0002	PROTECTION ANGLE:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	.99	.93	.88	.96	.91	.86	.92	.87	.83	.88	.84	.81	.84	.81	.78	.76
2.0	.83	.74	.67	.81	.73	.66	.77	.70	.64	.73	.68	.63	.70	.65	.61	.59
3.0	.70	.60	.53	.69	.59	.52	.66	.58	.51	.63	.56	.50	.60	.54	.49	.46
4.0	.61	.51	.43	.60	.50	.42	.57	.49	.42	.55	.47	.41	.52	.46	.41	.38
5.0	.54	.44	.36	.53	.43	.36	.50	.42	.35	.48	.41	.35	.46	.40	.34	.32
6.0	.48	.38	.31	.47	.37	.30	.45	.37	.30	.43	.36	.30	.42	.35	.29	.27
7.0	.43	.33	.27	.42	.33	.26	.41	.32	.26	.39	.32	.26	.38	.31	.26	.24
8.0	.39	.30	.23	.38	.30	.23	.37	.29	.23	.36	.28	.23	.35	.28	.23	.21
9.0	.36	.27	.21	.35	.27	.21	.34	.26	.21	.33	.26	.20	.32	.25	.20	.18
10.0	.33	.24	.19	.32	.24	.19	.31	.24	.19	.30	.23	.18	.29	.23	.18	.16

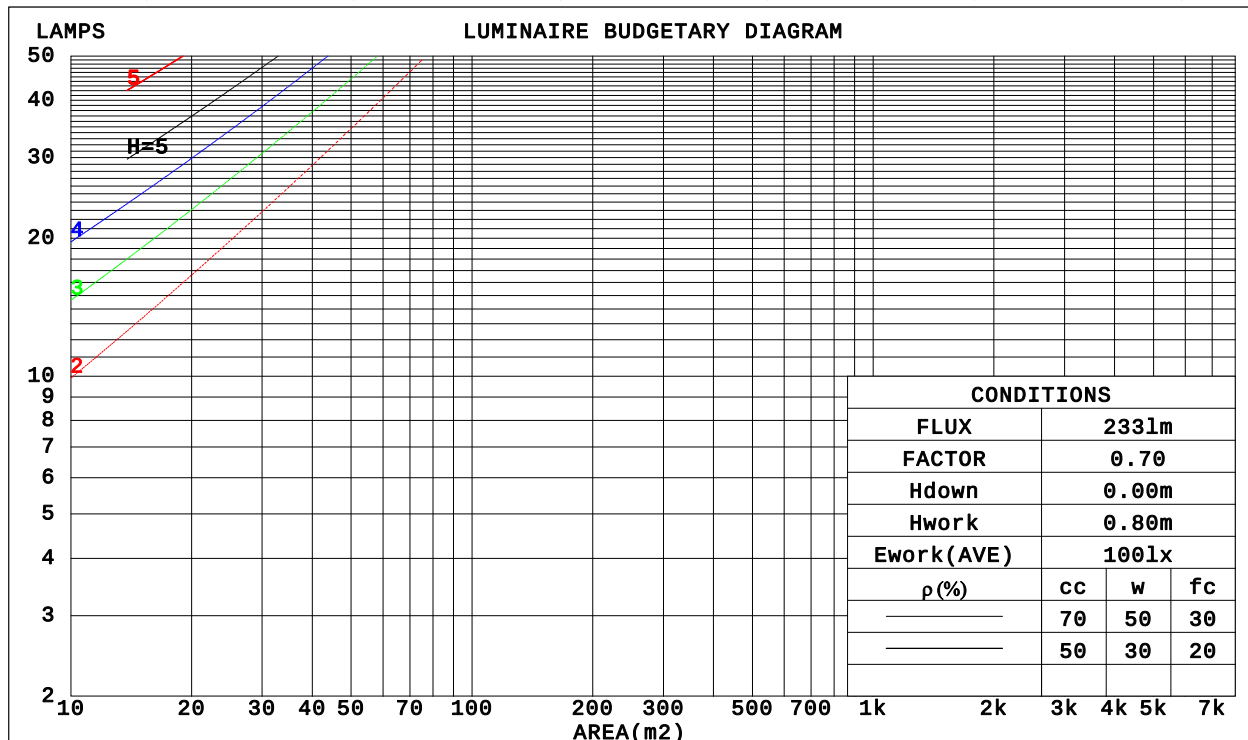

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2019-01-10

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity: 65.0%
 Test Distance: 9.443m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:3.750V I:0.6002A P:2.251W PF:1.000 Lamp Flux:233.095x1 lm														
NAME: 600-023 (Oval Lens)							TYPE:				WEIGHT:			
DIM.:							SPEC.:				SERIAL No.:1			
MFR.:							SUR.:0.0002				PROTECTION ANGLE:			

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)															
0.0																
1.0	.412	.235	.074	.405	.231	.073	.391	.224	.072	.379	.218	.070	.367	.213	.069	
2.0	.368	.202	.062	.361	.199	.061	.349	.194	.060	.337	.189	.059	.327	.185	.058	
3.0	.327	.174	.052	.321	.172	.052	.310	.168	.051	.300	.164	.050	.291	.161	.050	
4.0	.293	.152	.045	.288	.151	.045	.278	.147	.044	.269	.144	.044	.260	.141	.043	
5.0	.264	.135	.039	.260	.133	.039	.251	.131	.039	.243	.128	.038	.236	.126	.038	
6.0	.241	.121	.035	.237	.120	.034	.229	.117	.034	.222	.115	.034	.215	.113	.034	
7.0	.221	.109	.031	.217	.108	.031	.210	.106	.031	.204	.105	.030	.198	.103	.030	
8.0	.204	.100	.028	.201	.099	.028	.194	.097	.028	.189	.096	.028	.183	.094	.027	
9.0	.189	.091	.026	.186	.091	.025	.181	.089	.025	.176	.088	.025	.171	.087	.025	
10.0	.176	.085	.023	.174	.084	.023	.169	.083	.023	.164	.082	.023	.160	.080	.023	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.187	.155	.126	.160	.133	.109	.110	.092	.075	.063	.053	.044	.020	.017	.014	
2.0	.182	.132	.089	.156	.113	.077	.107	.078	.054	.062	.046	.031	.020	.015	.010	
3.0	.176	.115	.066	.150	.099	.057	.103	.069	.040	.060	.040	.024	.019	.013	.008	
4.0	.168	.102	.052	.144	.088	.045	.099	.061	.032	.057	.036	.019	.018	.012	.006	
5.0	.159	.092	.042	.137	.080	.037	.094	.056	.026	.055	.033	.015	.018	.011	.005	
6.0	.151	.084	.035	.130	.073	.031	.090	.051	.022	.052	.030	.013	.017	.010	.004	
7.0	.144	.077	.030	.124	.067	.026	.085	.047	.019	.050	.028	.011	.016	.009	.004	
8.0	.136	.071	.026	.117	.062	.023	.081	.043	.016	.047	.026	.010	.015	.008	.003	
9.0	.130	.066	.023	.112	.057	.020	.077	.040	.015	.045	.024	.009	.015	.008	.003	
10.0	.123	.062	.021	.106	.054	.018	.074	.038	.013	.043	.022	.008	.014	.007	.003	

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2019-01-10

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
Humidity:65.0%
Test Distance:9.443m [K=1.0000]
Remarks:

Uncorrected UGR Table

Test:U:3.750V I:0.6002A P:2.251W PF:1.000 Lamp Flux:233.095x1 lm											
NAME: 600-023 (Oval Lens)					TYPE:			WEIGHT:			
DIM.:					SPEC.:			SERIAL No.:1			
MFR.:					SUR.:0.0002			PROTECTION ANGLE:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	38.9	40.7	39.2	40.9	41.1	21.9	23.7	22.2	23.9	24.1	
	3H	44.6	46.2	44.9	46.4	46.7	21.8	23.5	22.1	23.7	24.0
	4H	47.3	48.9	47.7	49.2	49.4	21.7	23.3	22.0	23.6	23.8
	6H	49.2	50.7	49.6	51.0	51.3	21.6	23.1	21.9	23.4	23.7
	8H	49.3	50.7	49.6	51.0	51.3	21.5	23.0	21.9	23.3	23.6
	12H	49.2	50.6	49.6	51.0	51.3	21.5	22.9	21.8	23.2	23.5
4H	2H	38.6	40.2	38.9	40.4	40.7	24.4	26.0	24.7	26.2	26.5
	3H	44.2	45.6	44.6	45.9	46.2	24.2	25.6	24.6	25.9	26.3
	4H	47.0	48.3	47.4	48.6	49.0	24.1	25.4	24.5	25.8	26.1
	6H	49.0	50.1	49.4	50.5	50.9	24.0	25.2	24.4	25.6	25.9
	8H	49.1	50.2	49.5	50.5	50.9	24.0	25.1	24.4	25.5	25.8
	12H	49.0	50.0	49.5	50.4	50.9	23.9	25.0	24.4	25.3	25.8
8H	4H	46.8	47.9	47.3	48.3	48.7	24.7	25.8	25.2	26.2	26.6
	6H	48.8	49.8	49.3	50.2	50.6	24.7	25.6	25.1	26.0	26.4
	8H	48.9	49.8	49.4	50.2	50.7	24.6	25.5	25.1	25.9	26.3
	12H	48.9	49.7	49.4	50.1	50.6	24.6	25.3	25.1	25.8	26.3
12H	4H	46.8	47.8	47.2	48.2	48.6	24.8	25.8	25.2	26.2	26.6
	6H	48.8	49.6	49.3	50.1	50.5	24.7	25.6	25.2	26.0	26.5
	8H	48.9	49.6	49.4	50.1	50.6	24.7	25.4	25.2	25.9	26.4
Variations with the observer position at spacings:											
S = 1.0H	+ 1.1 / - 1.0					+ 2.2 / - 4.9					
1.5H	+ 2.1 / - 2.6					+ 2.5 / - 3.0					
2.0H	+ 3.4 / - 5.2					+ 4.3 / - 6.1					

CIE Pub.117 Corrected 233.1 lm Total Lamp Luminous Flux.(8log(F/F0) = -5.1)

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2019-01-10

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.276
Humidity:65.0%
Test Distance:9.443m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:3.750V I:0.6002A P:2.251W PF:1.000 Lamp Flux:233.095x1 lm		
NAME: 600-023 (Oval Lens)	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:1
MFR.:	SUR.:0.0002	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	50	37	29	49	37	29	48	36	29	22
0.80	59	46	37	58	45	37	56	44	37	29
1.00	67	54	45	66	53	45	63	55	44	36
1.25	74	61	52	72	60	52	69	59	51	42
1.50	80	67	58	78	66	58	74	64	57	48
2.00	87	76	68	85	75	67	81	73	66	56
2.50	92	82	74	90	81	73	86	78	72	62
3.00	96	87	80	94	86	79	89	83	77	67
4.00	101	94	88	99	92	86	94	89	84	74
5.00	105	98	93	102	96	91	97	92	88	78
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2019-01-10

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:9.443m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:3.750V I:0.6002A P:2.251W PF:1.000 Lamp Flux:233.095x1 lm		
NAME: 600-023 (Oval Lens)	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:1
MFR.:	SUR.:0.0002	PROTECTION ANGLE:

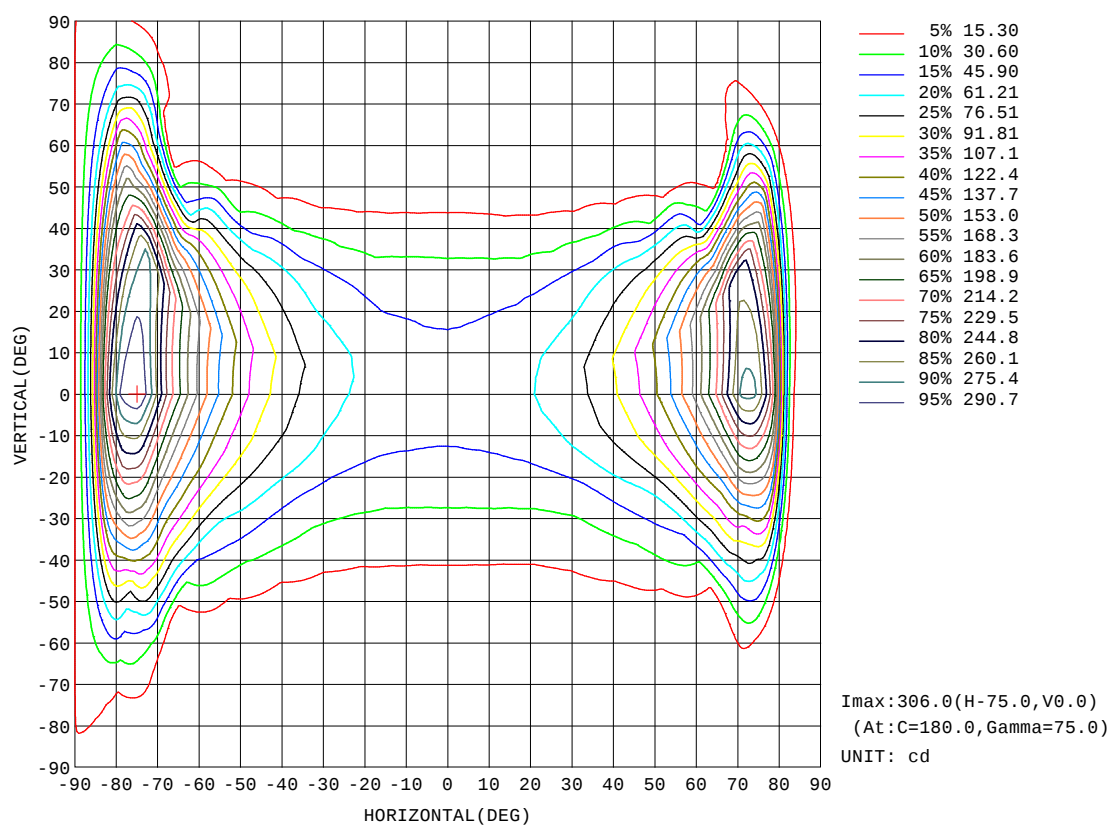


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2019-01-10

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.276
Humidity:65.0%
Test Distance:9.443m [K=1.0000]
Remarks:

AAI Figure

Test:U:3.750V I:0.6002A P:2.251W PF:1.000 Lamp Flux:233.095x1 lm		
NAME: 600-023 (Oval Lens)	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:1
MFR.:	SUR.:0.0002	PROTECTION ANGLE:

Flux out:85.84 lm

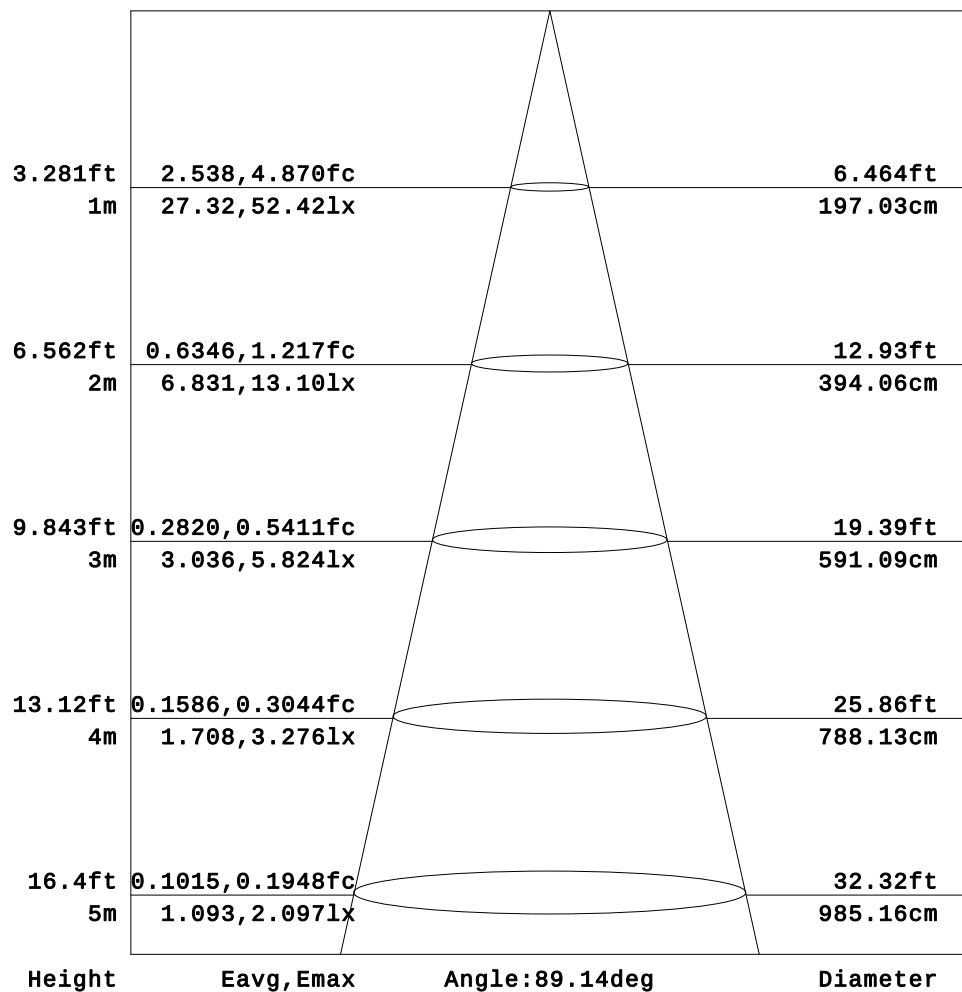


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2019-01-10

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.276
Humidity:65.0%
Test Distance:9.443m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:3.750V I:0.6002A P:2.251W PF:1.000 Lamp Flux:233.095x1 lm		
NAME: 600-023 (Oval Lens)	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:1
MFR.:	SUR.:0.0002	PROTECTION ANGLE:

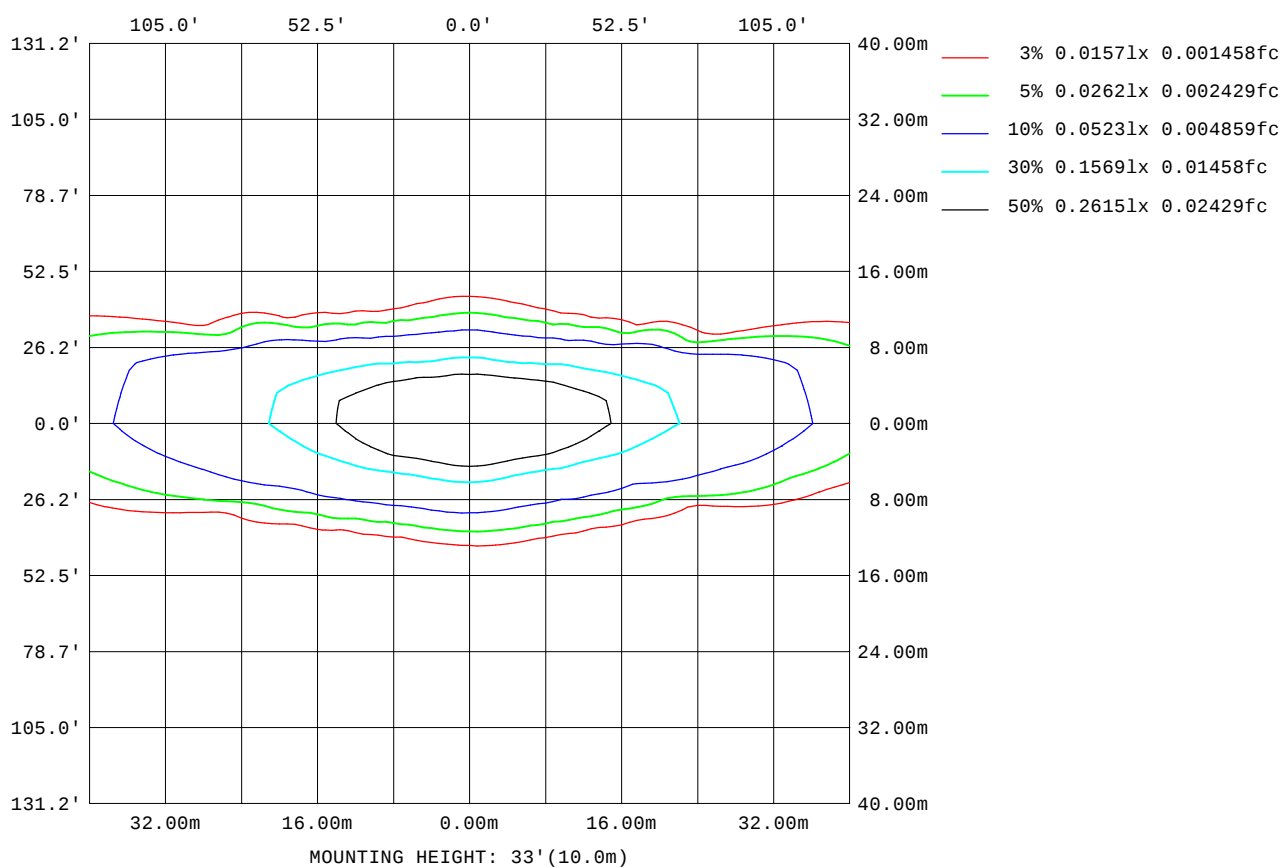

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2019-01-10

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.276
Humidity: 65.0%
Test Distance: 9.443m [K=1.0000]
Remarks:

Planar Illuminance Curve

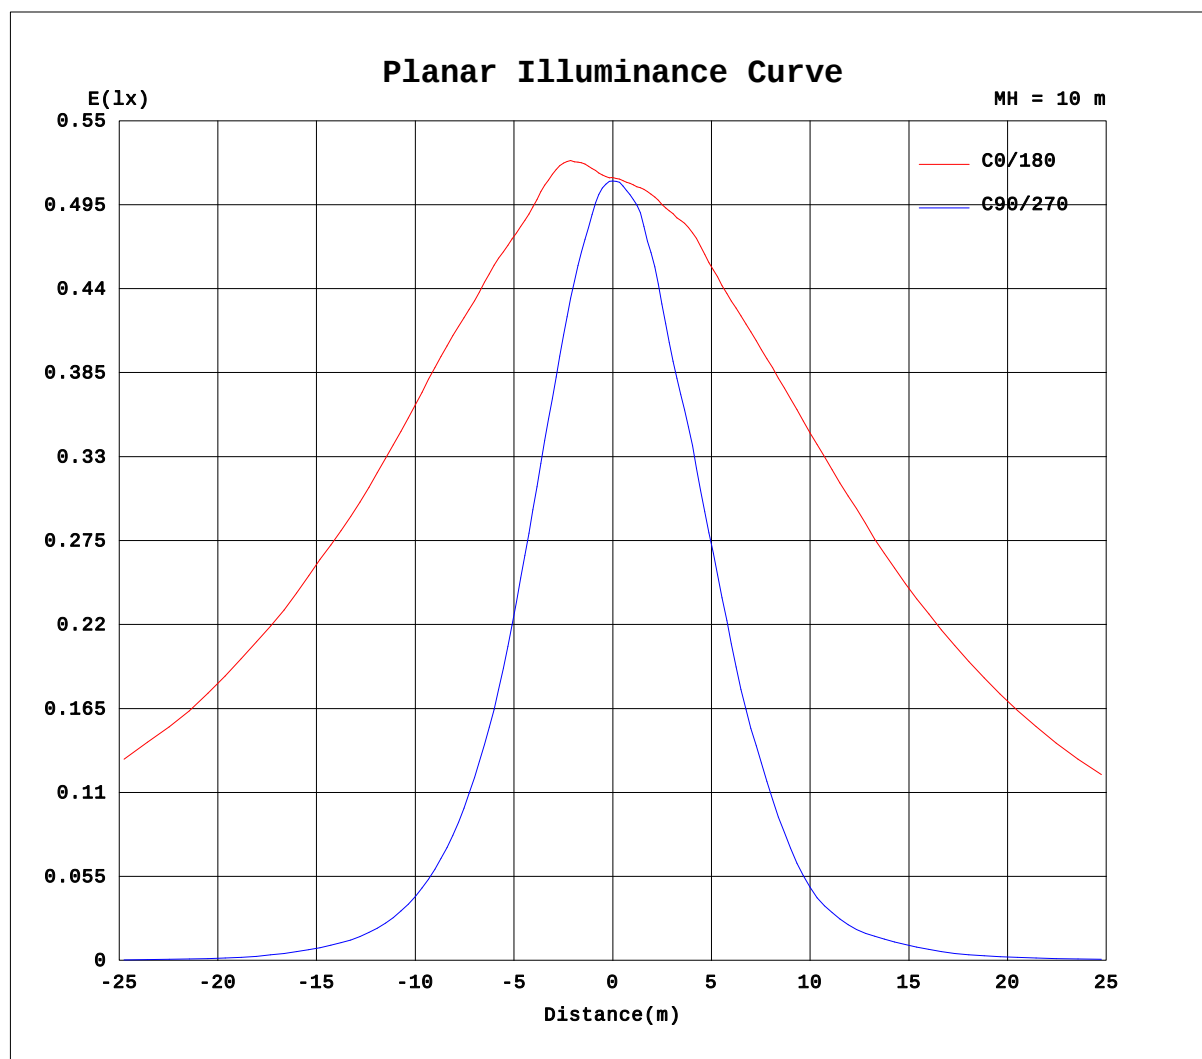

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2019-01-10

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.276
Humidity: 65.0%
Test Distance: 9.443m [K=1.0000]
Remarks:

Test:U:3.750V I:0.6002A P:2.251W PF:1.000 Lamp Flux:233.095x1 lm		
NAME: 600-023 (Oval Lens)	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:1
MFR.:	SUR.:0.0002	PROTECTION ANGLE:

UNIT: cd

[illegible]

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.276
Humidity: 65.0%
Test Distance: 9.443m [K=1.0000]
Remarks:

```

Test:U:3.750V I:0.6002A P:2.251W PF:1.000 Lamp Flux:233.095x1 lm		
NAME: 600-023 (Oval Lens)	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:1
MFR.:	SUR.:0.0002	PROTECTION ANGLE:

UNIT: cd

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2019-01-10

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.276
Humidity: 65.0%
Test Distance: 9.443m [K=1.0000]
Remarks:

```