



70 RT HP is a complete offer of rotary isolator switches from 16 A to 160 A, available in boxes both in insulating material and aluminium, in control or emergency versions, compatible with the main applications for residential, tertiary and industrial contexts.

DC versions for photovoltaic applications are also available from 16 A to 40 A in insulating box.


The series is completed with versions for board from 16 A to 1000 A and for DIN rail fixing from 16 A to 63 A, which can be equipped with auxiliary contacts.

The devices have been designed to reduce wiring time, facilitate installation and guarantee the maximum safety and robustness even in the most demanding conditions.

ELEKTRISCHE KENMERKEN

Installatieautomaat	Roterende lastscheider	Versie	Voor bord
Nominale stroom (A)	63	Aant. modules EN 50022	5
Aant. polen	4P	Regelings veld	114 - 177 mm
Stroom bij AC21A (415 V)	63	Type	Voor noodgevallen
Stroom in AC22A (415V)	63	Kleur knop	Rood
Stroom in AC23A (415V)	63	Vergrendelbaar	JA (max. 3 sloten op UIT)
Vermogensverlies per pool	2,58 W/pool	ACCESSORIES	-
Kabel sectie	2,5-25 mm ²	Type accessoire	Max. 2 hulpcontacten (1 per zijde)

DIMENSIONAL

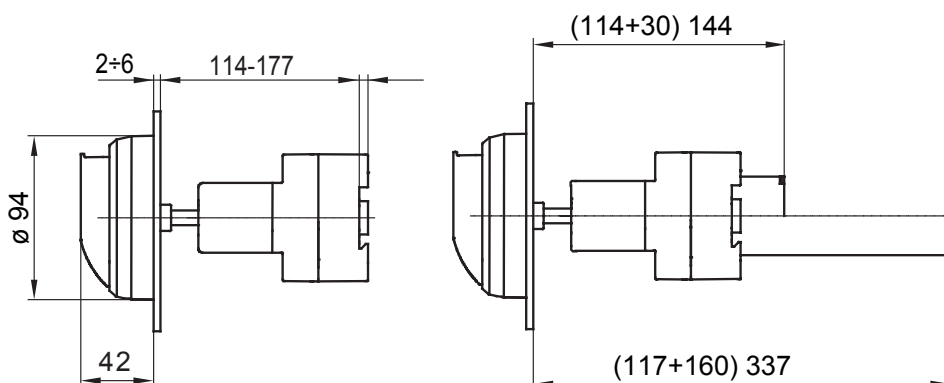

STANDARDS/APPROVALS

