



70 RT HP is a complete offer of rotary isolator switches from 16 A to 160 A, available in boxes both in insulating material and aluminium, in control or emergency versions, compatible with the main applications for residential, tertiary and industrial contexts.

DC versions for photovoltaic applications are also available from 16 A to 40 A in insulating box.


The series is completed with versions for board from 16 A to 1000 A and for DIN rail fixing from 16 A to 63 A, which can be equipped with auxiliary contacts.

The devices have been designed to reduce wiring time, facilitate installation and guarantee the maximum safety and robustness even in the most demanding conditions.

ELEKTRISCHE KENMERKEN

Installatieautomaat	Roterende lastscheider	- Functionele kenmerken	-
Nominale stroom (A)	63	Aant. modules EN 50022	Voor bord
Aant. polen	3P	Regelings veld	5
Stroom bij AC21A (415 V)	63	Type	114 - 177 mm
Stroom in AC22A (415V)	63	Kleur knop	Voor noodgevallen
Stroom in AC23A (415V)	63	Vergrendelbaar	Rood
Vermogensverlies per pool	2,58 W/pool	ACCESSORIES	JA (max. 3 sloten op UIT)
Kabel sectie	2,5-25 mm ²	Type accessoire	Max. 2 hulpcontacten (1 per zijde)

DIMENSIONAL

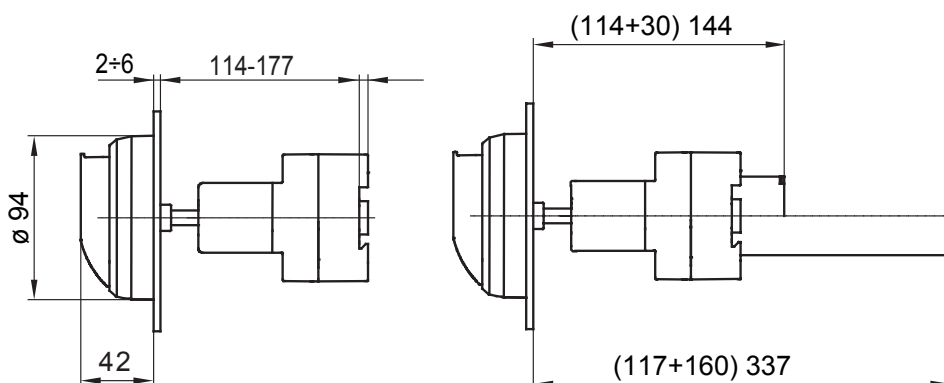

STANDARDS/APPROVALS

