


START Downlight Flat IP44 Dimmable 155mm Round Recessed

Start Downlight Flat 157 IP44 1100LM 840 DIM
0054121

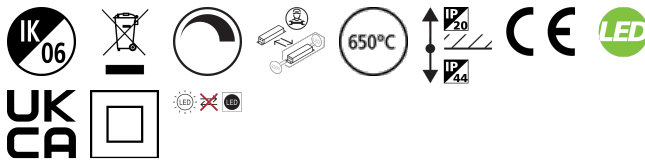


PRODUCT OVERVIEW

Product name	Start Downlight Flat 157 IP44 1100LM 840 DIM
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
E-number FI	4278495
Warranty	5 years
Fixture luminous flux (lm)	1100
Luminaire efficacy (lm/W)	92
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	12
Electrical protection	Class II
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK06
Product EAN number	5410288541211

PHOTOMETRY

START Downlight Flat IP44 Dimmable 155mm Round Recessed

Start Downlight Flat 157 IP44 1100LM 840 DIM
0054121

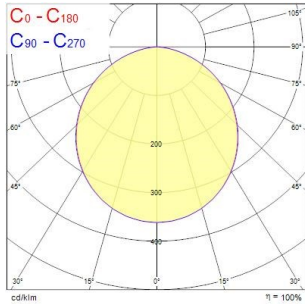

0.5	1.43 1.42	E(0°) E(C90) E(C180)	1891 149 162
1.0	2.87 2.84	E(0°) E(C90) E(C180)	368 27 30
1.5	4.30 4.25	E(0°) E(C90) E(C180)	177 17 17
2.0	5.73 5.67	E(0°) E(C90) E(C180)	89 9 10
2.5	7.17 7.09	E(0°) E(C90) E(C180)	64 6 6
3.0	8.60 8.51	E(0°) E(C90) E(C180)	44 4 4

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 180.0°)
— C90 - C270 (Half beam angle: 110.2°)

TECHNICAL DRAWINGS

