


Product End of Life Instructions

PrismaSeT HD Active



Potential disassembly risks

Risk of electric shock due to secondary electrical components connected.

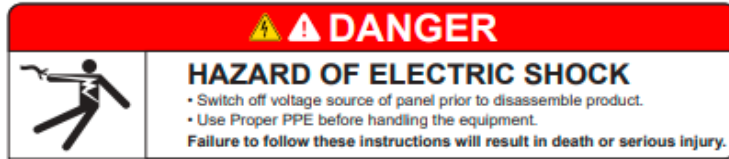


This product has PCB Board electronics components materials which are recommended to be treated separately during the End of Life operations.

There are several steps to process the products at the end of life so as to recover components, materials or energy :

Reuse --> Depollution --> Dismantling --> Shredding

End of Life Instructions

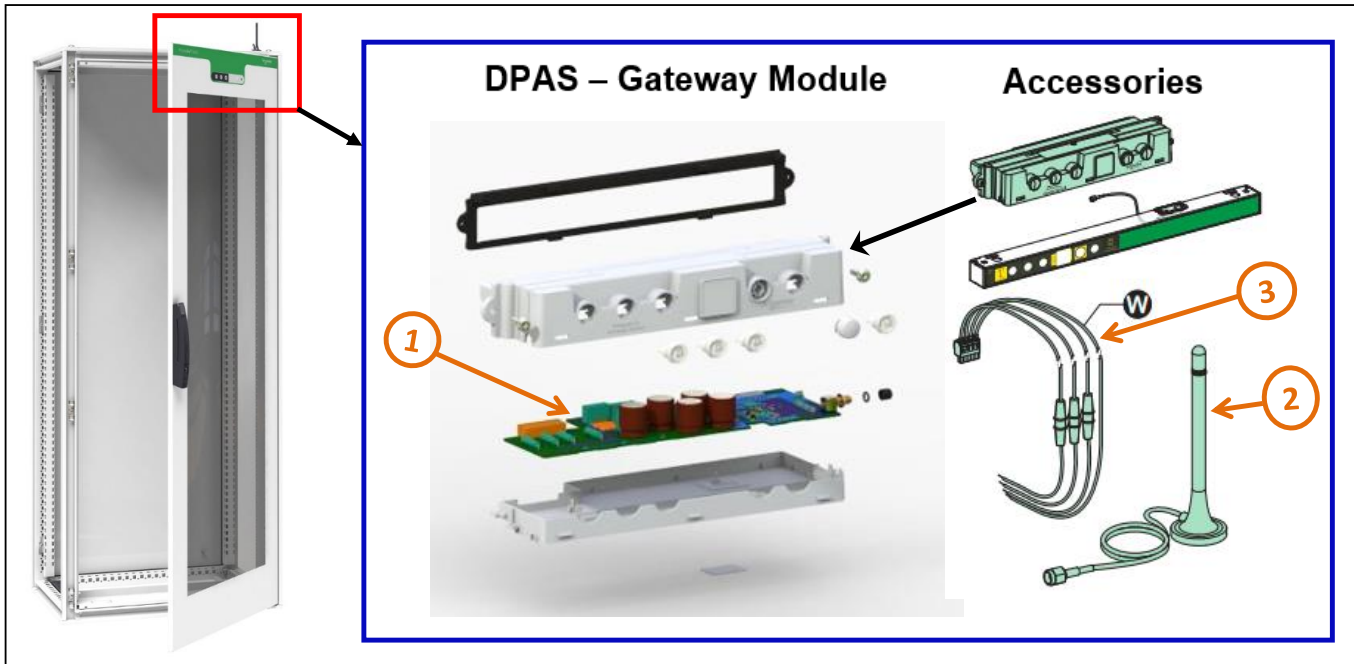

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	Electronic Board (Communication) > 10cm ²	125.75	PCBA Board
To be depolluted	2	Cable (Optical)	50	External Magnetic Mount LTE Antenna - Antenna, Cable RG-174 / U (1 meter)/ Ingress Protection - IP65 / Operating Temperature (°C) -40 to + 70/ SMA Male /ANTENNA MAGNETIC MOUNTING/ Black Color/ TPE
To be depolluted	3	Cable (high current)	140	DPAS WIRING KIT - Power cables for wireless GTW 2m 3P+N



Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	PrismaSeT HD Active is the newest generation of low-voltage switchboards for harsh environments with optional built-in connectivity (connectivity available up to 4000 A). This revolutionary approach lets panel builders and electrical contractors give a voice to electrical distribution and be notified wherever they are. Commissioning is made faster, while smart alarms help optimize maintenance and improve uptime.
Product reference	NSYSFP20750TEDA
Total representative product mass	90500 g
Representative product dimensions	2000mm x 700mm x 500mm
Accessories	No
Date of information release	01/2022



Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.	
Recyclability potential	94%	Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Schneider Electric Industries SAS
Country Customer Care Center
<http://www.schneider-electric.com/contact>
35, rue Joseph Monier
CS 30323
F- 92506 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 896 313 776 €

www.schneider-electric.com

ENVEOLI2112006_V2

Published by Schneider Electric

© 2019 - Schneider Electric – All rights reserved

01/2022