


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:3.0000V I:0.6900A P:2.0700W PF:1.0000 Freq:0Hz Lamp Flux:277.203x1 lm		
NAME: 600-026 (Oval Lens)	TYPE:	WEIGHT:1
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.:	SUR.:34.5*25.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 133.91 lm/W			
MODEL	600-026 (Oval Lens)	Imax(cd)	443.0	S/MH(C0/180)	0.96
NOMINAL POWER(W)	2.07	LOR(%)	100.0	S/MH(C90/270)	3.78
RATED VOLTAGE(V)	3.0	TOTAL FLUX(lm)	277.20	η UP,DN(C0-180)	0.0,49.9
NOMINAL FLUX(lm)	277.203	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,50.1
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	3.0	η down(%)	99.9	CIBSE SHR MAX	0.95

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

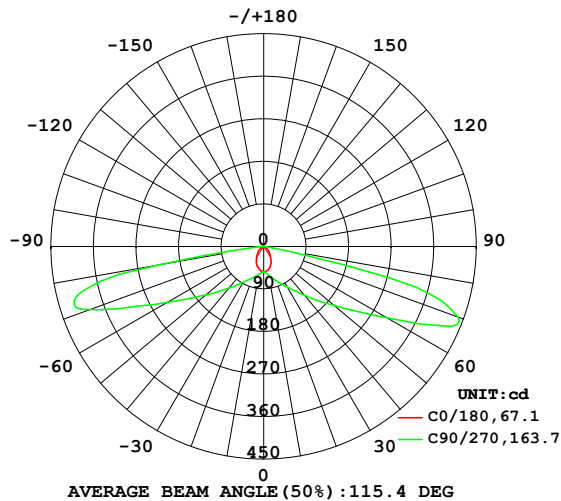

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

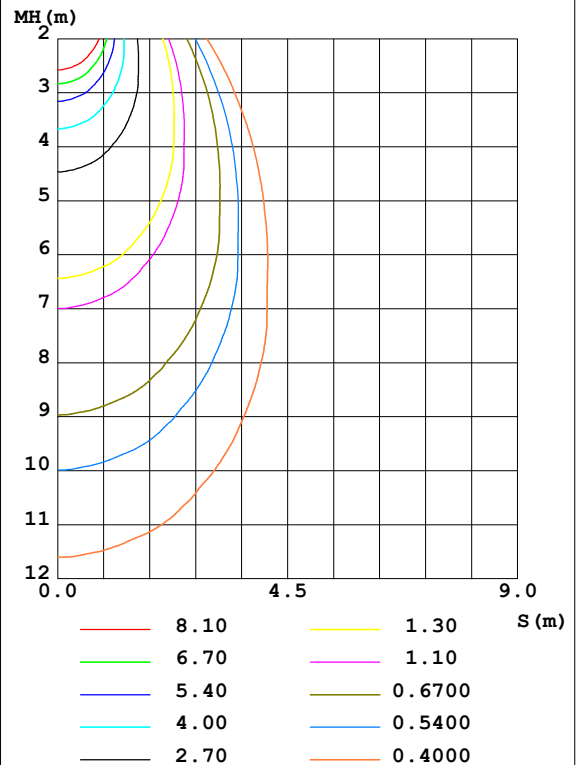

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2019-07-31

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	51.17	56.15	61.78	55.25	50.33	55.47	60.38	55.62	0- 10	5.227	5.227	1.89,1.89
20	42.96	57.01	77.14	55.24	42.61	54.36	71.30	55.44	10- 20	16.05	21.27	7.67,7.67
30	31.00	48.21	98.59	46.66	31.48	46.26	87.66	47.08	20- 30	25.84	47.11	17,17
40	20.18	32.39	135.8	33.19	21.02	34.06	115.7	33.14	30- 40	33.55	80.66	29.1,29.1
50	12.27	21.27	194.7	20.74	13.45	22.87	159.2	21.55	40- 50	40.42	121.1	43.7,43.7
60	6.030	12.28	302.9	12.81	6.859	14.66	237.7	13.12	50- 60	46.88	168.0	60.6,60.6
70	2.685	3.348	437.5	3.754	2.876	4.754	390.8	4.071	60- 70	57.25	225.2	81.2,81.2
80	1.362	1.343	21.56	1.492	1.541	1.878	227.2	1.820	70- 80	47.77	273.0	98.5,98.5
90	0.0001	0	0.4160	0	0	0	0.3805	0	80- 90	4.055	277.1	99.9,99.9
100	0	0	0.5798	0	0	0	0.1408	0	90-100	0.1446	277.2	100,100
110	0	0	0	0	0	0	0	0	100-110	0.0074	277.2	100,100
120	0	0	0	0	0	0	0	0	110-120	0	277.2	100,100
130	0	0	0	0	0	0	0	0	120-130	0	277.2	100,100
140	0	0	0	0	0	0	0	0	130-140	0	277.2	100,100
150	0	0	0	0	0	0	0	0	140-150	0	277.2	100,100
160	0	0	0	0	0	0	0	0	150-160	0	277.2	100,100
170	0	0	0	0	0	0	0	0	160-170	0	277.2	100,100
180	0	0	0	0	0	0	0	0	170-180	0	277.2	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-07-31

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:3.0000V I:0.6900A P:2.0700W PF:1.0000 Freq:0Hz Lamp Flux:277.203x1 lm		
NAME: 600-026 (Oval Lens)	TYPE:	WEIGHT:1
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.:	SUR.:34.5*25.5	Shielding Angle:

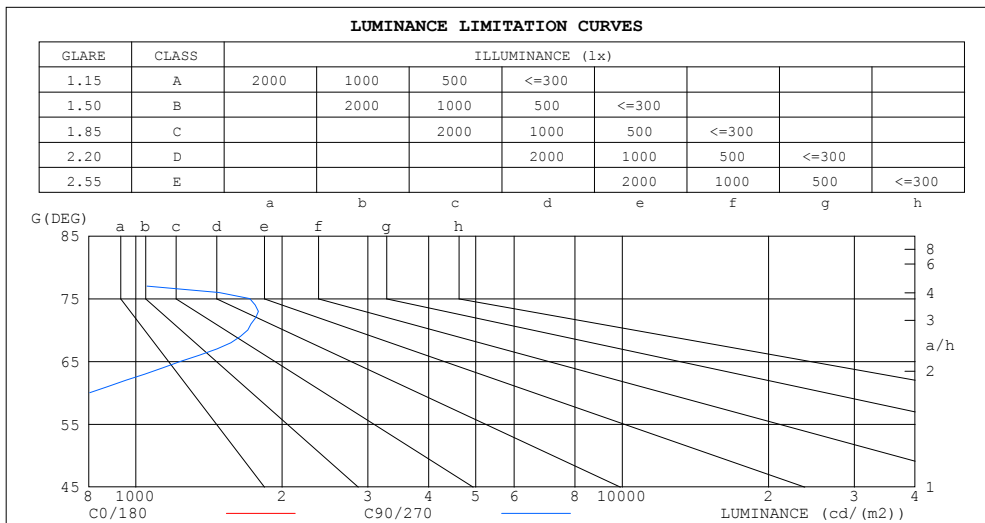

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	11	6
80	10	165
75	10	1715
70	10	1699
65	12	1237
60	16	805
55	21	554
50	25	402
45	30	304


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2019-07-31

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:3.0000V I:0.6900A P:2.0700W PF:1.0000 Freq:0Hz Lamp Flux:277.203x1 lm		
NAME: 600-026 (Oval Lens)	TYPE:	WEIGHT:1
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.:	SUR.:34.5*25.5	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.00	.95	.90	.98	.93	.89	.93	.89	.86	.89	.86	.83	.86	.83	.80	.78
2.0	.84	.75	.68	.82	.74	.67	.78	.71	.66	.74	.69	.64	.71	.67	.63	.60
3.0	.71	.61	.53	.69	.60	.53	.66	.58	.52	.63	.57	.51	.61	.55	.50	.47
4.0	.61	.51	.43	.60	.50	.43	.57	.49	.42	.55	.47	.42	.53	.46	.41	.38
5.0	.54	.44	.36	.53	.43	.36	.50	.42	.35	.48	.41	.35	.46	.40	.34	.32
6.0	.48	.38	.30	.47	.37	.30	.45	.36	.30	.43	.35	.30	.41	.35	.29	.27
7.0	.43	.33	.26	.42	.33	.26	.40	.32	.26	.39	.31	.26	.37	.31	.25	.23
8.0	.39	.30	.23	.38	.29	.23	.37	.29	.23	.35	.28	.23	.34	.27	.22	.20
9.0	.36	.27	.20	.35	.26	.20	.34	.26	.20	.32	.25	.20	.31	.25	.20	.18
10.0	.33	.24	.18	.32	.24	.18	.31	.23	.18	.30	.23	.18	.29	.23	.18	.16

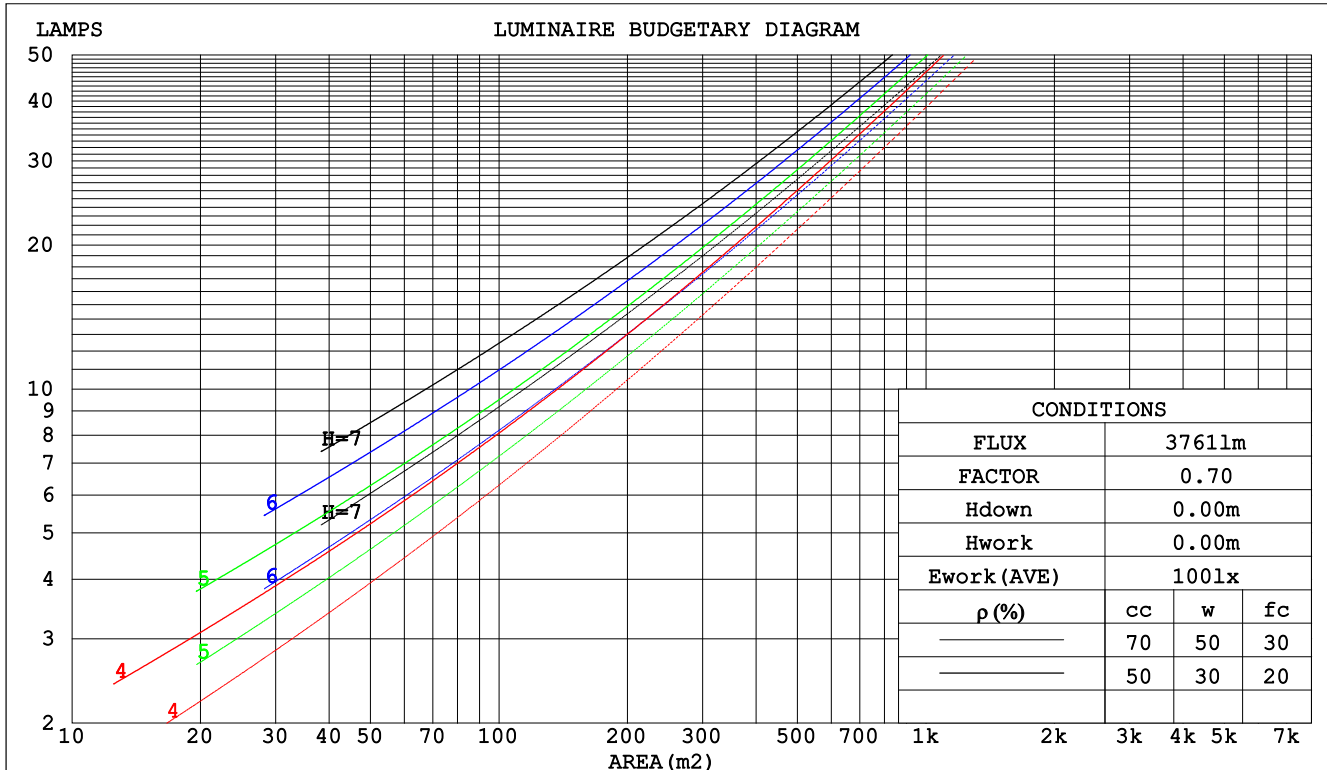

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-07-31

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:3.0000V I:0.6900A P:2.0700W PF:1.0000 Freq:0Hz Lamp Flux:277.203x1 lm					
NAME: 600-026 (Oval Lens)			TYPE:		WEIGHT:1
SPEC.:5000K			DIM.:		SERIAL No.:
MFR.:			SUR.:34.5*25.5		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.382	.217	.069	.375	.214	.068	.361	.207	.066	.348	.201	.064	.337	.195	.063		
2.0	.357	.195	.060	.350	.193	.059	.338	.188	.058	.326	.183	.057	.316	.179	.056		
3.0	.323	.172	.051	.317	.170	.051	.306	.166	.050	.296	.162	.050	.286	.159	.049		
4.0	.291	.151	.045	.286	.150	.044	.276	.147	.044	.267	.144	.043	.259	.141	.043		
5.0	.264	.135	.039	.260	.133	.039	.251	.131	.038	.243	.128	.038	.235	.126	.038		
6.0	.241	.121	.035	.237	.120	.034	.229	.118	.034	.222	.115	.034	.215	.113	.034		
7.0	.221	.109	.031	.218	.109	.031	.211	.107	.031	.204	.105	.030	.198	.103	.030		
8.0	.204	.100	.028	.201	.099	.028	.195	.097	.028	.189	.096	.028	.184	.094	.027		
9.0	.190	.092	.026	.187	.091	.026	.181	.090	.025	.176	.088	.025	.171	.087	.025		
10.0	.177	.085	.024	.174	.084	.024	.169	.083	.023	.165	.082	.023	.160	.081	.023		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.186	.156	.129	.159	.134	.111	.109	.092	.077	.063	.053	.045	.020	.017	.014	
2.0	.181	.132	.091	.155	.114	.078	.106	.079	.055	.061	.046	.032	.020	.015	.010	
3.0	.175	.115	.067	.150	.099	.058	.103	.069	.041	.060	.040	.024	.019	.013	.008	
4.0	.168	.102	.052	.144	.088	.046	.099	.062	.032	.057	.036	.019	.018	.012	.006	
5.0	.160	.092	.043	.137	.080	.037	.095	.056	.026	.055	.033	.016	.018	.011	.005	
6.0	.152	.084	.036	.131	.073	.031	.090	.051	.022	.052	.030	.013	.017	.010	.004	
7.0	.144	.077	.031	.124	.067	.027	.086	.047	.019	.050	.028	.011	.016	.009	.004	
8.0	.137	.072	.027	.118	.062	.023	.082	.044	.017	.048	.026	.010	.015	.008	.003	
9.0	.130	.067	.024	.112	.058	.021	.078	.041	.015	.045	.024	.009	.015	.008	.003	
10.0	.124	.062	.021	.107	.054	.019	.074	.038	.013	.043	.023	.008	.014	.007	.003	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2019-07-31

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:3.0000V I:0.6900A P:2.0700W PF:1.0000 Freq:0Hz Lamp Flux:277.203x1 lm											
NAME: 600-026 (Oval Lens)					TYPE:			WEIGHT:1			
SPEC.:5000K					DIM.:			SERIAL No.:			
MFR.:					SUR.:34.5*25.5			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		-4.7	-2.9	-4.4	-2.7	-2.5	13.3	15.0	13.6	15.2	15.5
	3H	-4.5	-2.8	-4.2	-2.6	-2.3	19.4	21.0	19.7	21.3	21.5
	4H	-4.4	-2.8	-4.1	-2.6	-2.3	21.5	23.1	21.9	23.4	23.7
	6H	-4.3	-2.8	-3.9	-2.5	-2.2	21.7	23.2	22.1	23.5	23.8
	8H	-4.2	-2.8	-3.9	-2.5	-2.2	21.7	23.1	22.0	23.4	23.7
	12H	-4.2	-2.8	-3.8	-2.5	-2.2	21.6	23.0	22.0	23.3	23.6
4H	2H	-1.7	-0.2	-1.4	0.1	0.4	12.9	14.5	13.2	14.8	15.0
	3H	-1.7	-0.3	-1.4	-0.0	0.3	19.0	20.4	19.4	20.7	21.1
	4H	-1.7	-0.4	-1.3	-0.1	0.3	21.2	22.5	21.6	22.8	23.2
	6H	-1.6	-0.5	-1.2	-0.1	0.3	21.5	22.6	21.9	23.0	23.4
	8H	-1.6	-0.5	-1.2	-0.1	0.3	21.4	22.5	21.8	22.9	23.3
	12H	-1.6	-0.6	-1.1	-0.2	0.2	21.4	22.4	21.8	22.8	23.2
8H	4H	-0.5	0.6	-0.0	1.0	1.4	21.1	22.2	21.5	22.5	22.9
	6H	-0.4	0.5	0.1	0.9	1.4	21.3	22.2	21.8	22.6	23.1
	8H	-0.3	0.5	0.1	0.9	1.4	21.3	22.1	21.8	22.5	23.0
	12H	-0.3	0.4	0.2	0.9	1.3	21.3	22.0	21.8	22.4	22.9
12H	4H	-0.3	0.7	0.2	1.1	1.5	21.0	22.0	21.5	22.4	22.8
	6H	-0.2	0.6	0.3	1.0	1.5	21.3	22.1	21.8	22.5	23.0
	8H	-0.1	0.6	0.4	1.0	1.5	21.3	22.0	21.8	22.4	22.9
Variations with the observer position at spacings:											
S = 1.0H	+ 1.7 / - 2.3					+ 0.8 / - 0.6					
1.5H	+ 3.0 / - 2.4					+ 2.2 / - 2.7					
2.0H	+ 4.6 / - 3.2					+ 2.9 / - 6.1					

CIE Pub.117, 277.2 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -4.5)

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2019-07-31

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:


```

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

Test:U:3.0000V I:0.6900A P:2.0700W PF:1.0000 Freq:0Hz Lamp Flux:277.203x1 lm		
NAME: 600-026 (Oval Lens)	TYPE:	WEIGHT:1
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.:	SUR.:34.5*25.5	Shielding Angle:

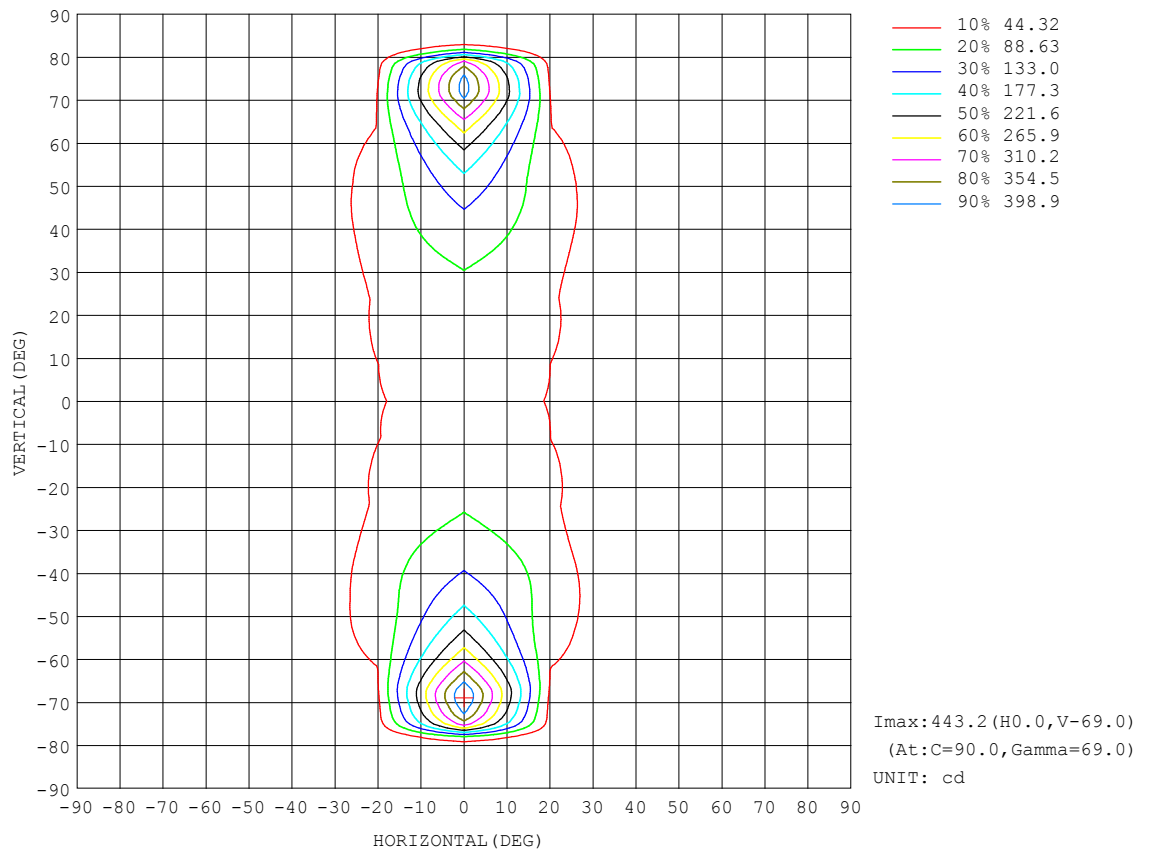


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2019-07-31

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

AAI Figure

Test:U:3.0000V I:0.6900A P:2.0700W PF:1.0000 Freq:0Hz Lamp Flux:277.203x1 lm		
NAME: 600-026 (Oval Lens)	TYPE:	WEIGHT:1
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.:	SUR.:34.5*25.5	Shielding Angle:

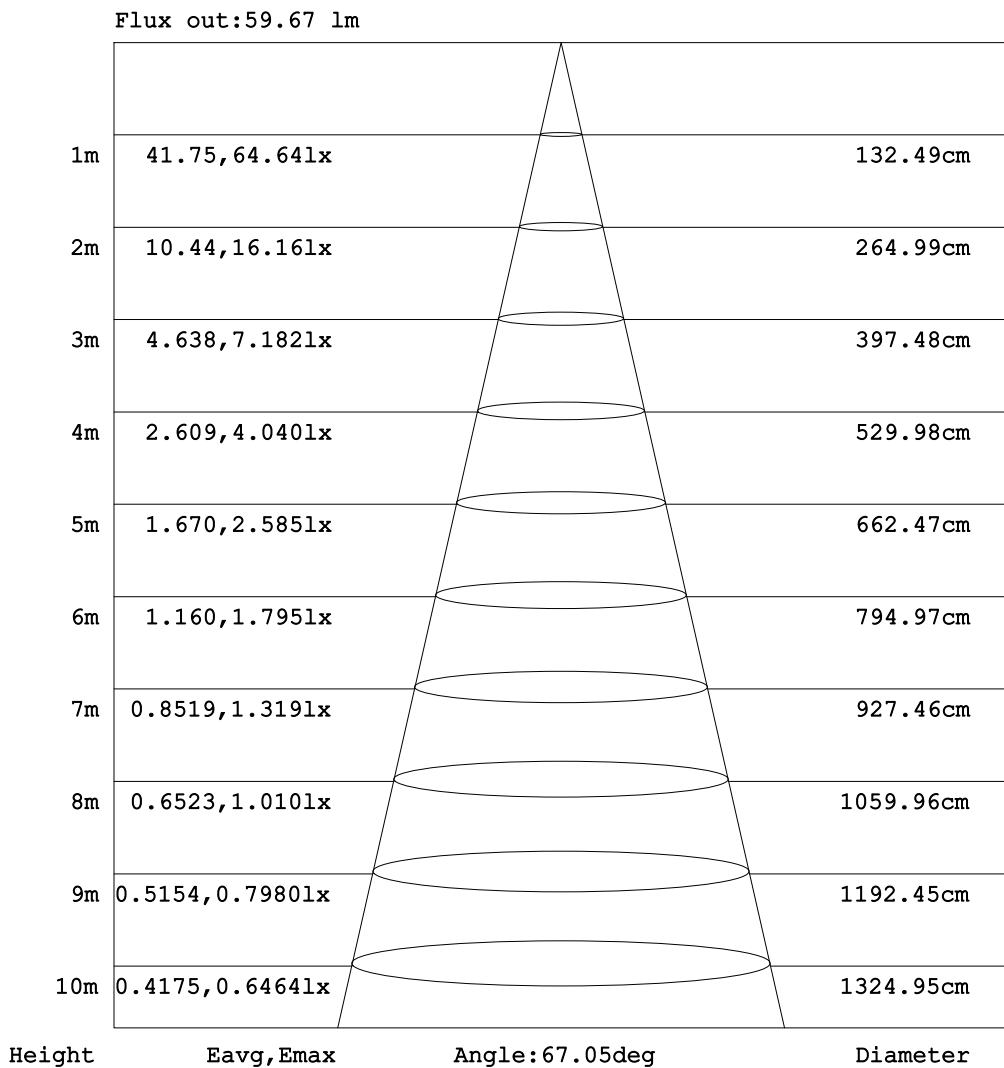


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2019-07-31

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:3.0000V I:0.6900A P:2.0700W PF:1.0000 Freq:0Hz Lamp Flux:277.203x1 lm		
NAME: 600-026 (Oval Lens)	TYPE:	WEIGHT:1
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.:	SUR.:34.5*25.5	Shielding Angle:

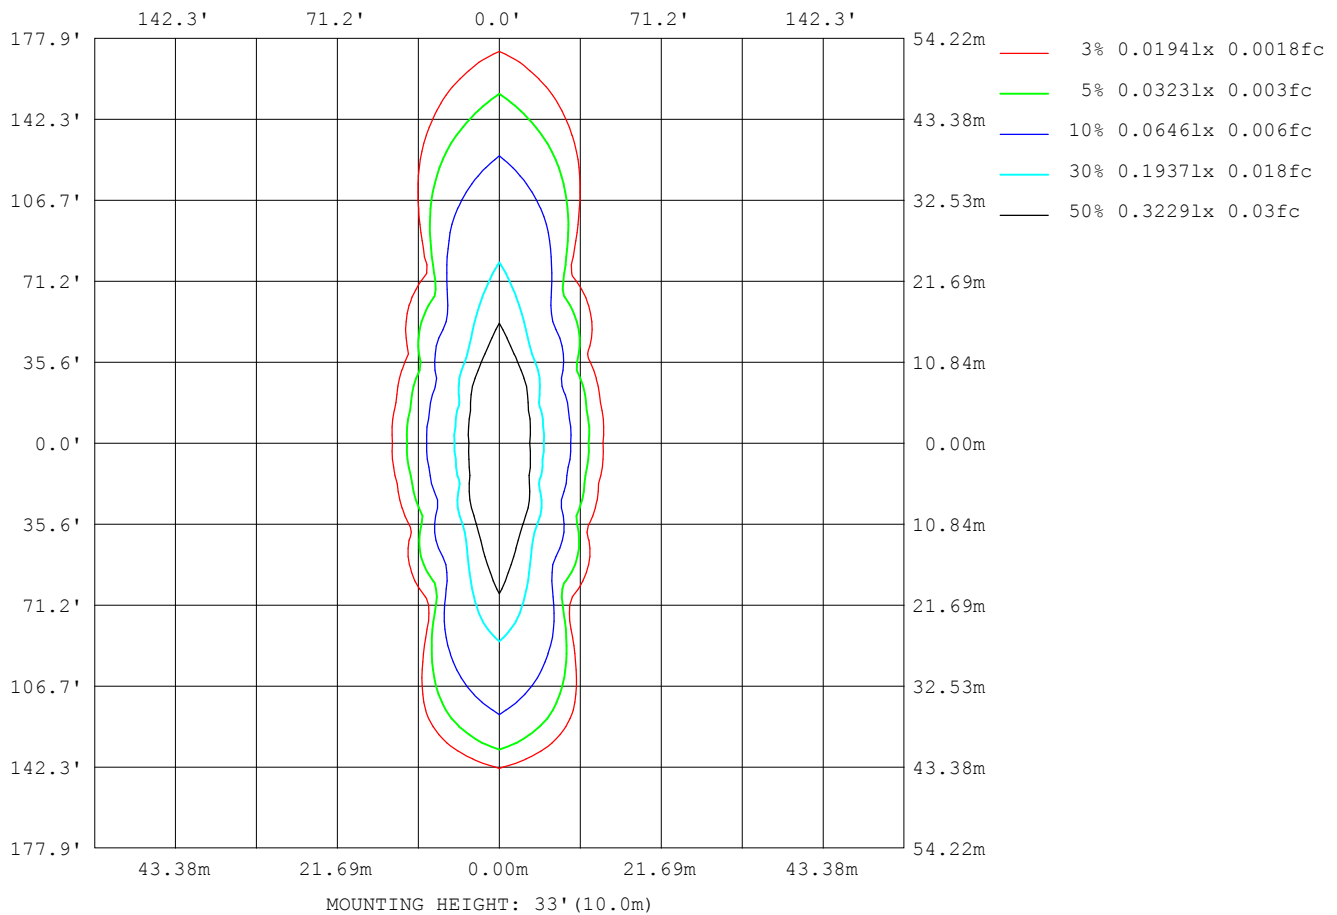

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2019-07-31

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:3.0000V I:0.6900A P:2.0700W PF:1.0000 Freq:0Hz Lamp Flux:277.203x1 lm		
NAME: 600-026 (Oval Lens)	TYPE:	WEIGHT:1
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.:	SUR.:34.5*25.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	13
L_0~180 (75) av	10
L_0~180 (85) av	11
L_90~270 (65) av	1093
L_90~270 (75) av	1910
L_90~270 (85) av	94
L_45 (65) av	25
L_45 (75) av	13
L_45 (85) av	7

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2019-07-31

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

Planar Illuminance Curve

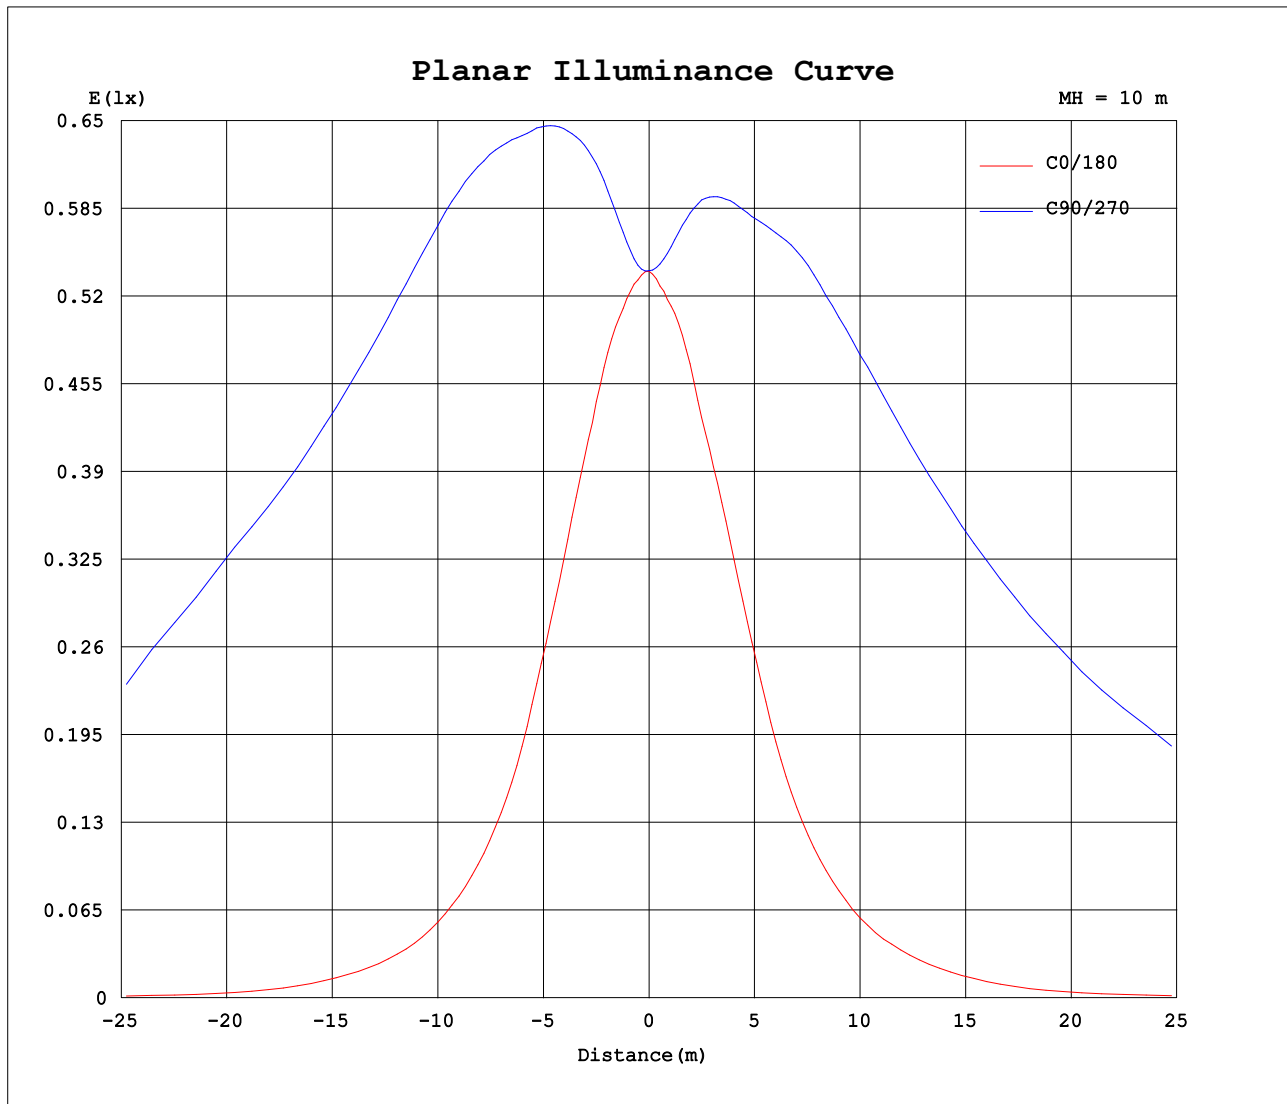

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2019-07-31

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
Humidity: 65.0%
Test Distance: 8.690m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:3.0000V I:0.6900A P:2.0700W PF:1.0000 Freq:0Hz Lamp Flux:277.203x1 lm		
NAME: 600-026 (Oval Lens)	TYPE:	WEIGHT:1
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.:	SUR.:34.5*25.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	53.9	53.9	53.9	53.9	53.9	53.9	53.9	53.9	53.9	53.9	53.9	53.9	53.9	53.9	53.9	53.9			
5	53.0	53.4	54.5	55.6	56.0	55.2	53.7	52.8	52.4	52.9	54.0	55.2	55.8	55.3	54.3	53.4			
10	51.2	52.6	56.2	60.1	61.8	59.1	55.3	51.6	50.3	52.1	55.5	58.6	60.4	59.1	55.6	52.5			
15	47.4	50.5	57.3	65.2	69.1	64.1	55.7	48.9	46.5	49.1	56.0	62.4	65.7	62.9	56.4	49.9			
20	43.0	46.3	57.0	69.8	77.1	68.6	55.2	45.3	42.6	45.7	54.4	65.3	71.3	66.1	55.4	46.0			
25	37.5	40.7	54.1	74.1	86.8	73.4	51.8	40.0	37.5	40.8	51.1	68.1	78.1	68.6	52.7	40.8			
30	31.0	33.9	48.2	78.1	98.6	78.3	46.7	34.0	31.5	34.6	46.3	71.3	87.7	71.5	47.1	34.6			
35	25.0	27.0	40.6	82.7	115	82.5	40.3	27.4	25.7	27.8	40.4	75.1	101	75.2	40.0	27.9			
40	20.2	21.4	32.4	87.0	136	85.3	33.2	22.4	21.0	22.7	34.1	77.4	116	78.3	33.1	22.4			
45	16.0	17.1	26.1	87.6	162	84.4	26.5	18.2	16.8	18.5	27.6	76.4	135	78.4	26.9	18.1			
50	12.3	13.4	21.3	80.3	195	76.8	20.7	14.7	13.5	15.0	22.9	71.8	159	74.7	21.5	14.3			
55	9.19	10.4	17.2	68.3	239	67.8	16.9	11.4	10.3	11.8	18.4	64.0	192	65.8	17.3	11.1			
60	6.03	6.98	12.3	56.2	303	56.1	12.8	7.63	6.86	8.47	14.7	55.5	238	56.4	13.1	7.72			
65	3.75	3.98	6.29	39.0	393	39.3	7.48	4.53	4.31	4.97	9.75	45.2	302	45.4	8.30	4.34			
70	2.68	2.77	3.35	16.2	437	18.5	3.75	3.02	2.88	3.24	4.75	31.1	391	28.8	4.07	2.91			
75	1.97	1.94	2.24	7.22	334	6.43	2.39	2.15	2.12	2.27	2.74	12.3	410	9.72	2.51	2.06			
80	1.36	1.33	1.34	7.28	21.6	6.22	1.49	1.53	1.54	1.64	1.88	5.19	227	7.56	1.82	1.49			
85	0.69	0.56	0.08	0.17	0.40	0.19	0.07	0.71	0.81	0.96	0.90	3.31	12.0	4.39	0.78	0.83			
90	0.00	0.00	0.00	0.25	0.42	0.29	0.00	0.00	0.00	0.00	0.00	0.20	0.38	0.16	0.00	0.00			
95	0.00	0.00	0.00	0.25	0.91	0.42	0.00	0.00	0.00	0.00	0.00	0.26	0.49	0.22	0.00	0.00			
100	0.00	0.00	0.00	0.07	0.58	0.48	0.00	0.00	0.00	0.00	0.00	0.37	0.14	0.34	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2019-07-31

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks: