


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:3.0000V I:0.6900A P:2.0700W PF:1.0000 Freq:0Hz Lamp Flux:291.327x1 lm		
NAME: 600-026 (Round Lens)	TYPE:	WEIGHT:1
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.:	SUR.:34.5*25.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 140.74 lm/W			
MODEL	600-026 (Round Lens)	I _{max} (cd)	63.17	S/MH(C0/180)	1.51
NOMINAL POWER(W)	2.07	LOR(%)	100.0	S/MH(C90/270)	1.49
RATED VOLTAGE(V)	3.0	TOTAL FLUX(lm)	291.33	η UP,DN(C0-180)	0.0,48.2
NOMINAL FLUX(lm)	291.327	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,51.7
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.75
TEST VOLTAGE(V)	3.0	η down(%)	100.0	CIBSE SHR MAX	1.75

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

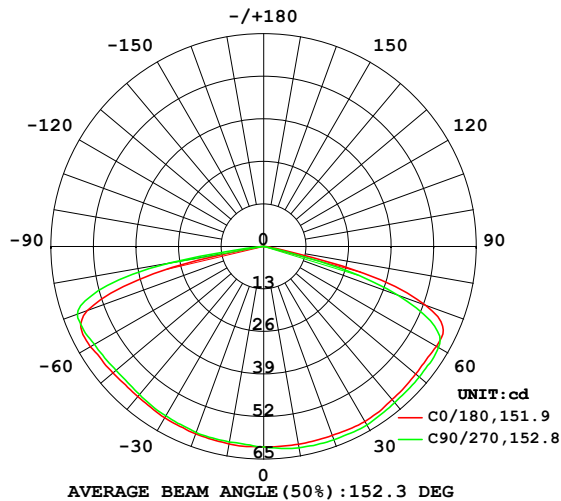

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

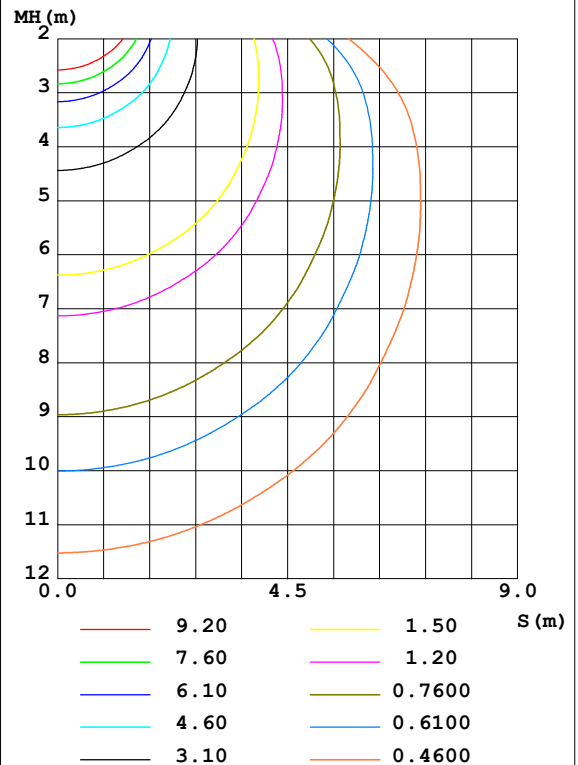

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2019-07-31

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	61.35	61.97	62.47	62.05	61.26	60.54	60.65	60.67	0- 10	5.857	5.857	2.01,2.01
20	61.43	62.66	62.84	62.27	60.94	60.33	60.51	60.73	10- 20	17.41	23.26	7.99,7.99
30	61.79	63.02	63.04	62.22	60.48	59.41	59.77	60.11	20- 30	28.37	51.64	17.7,17.7
40	61.06	63.15	62.32	61.79	59.90	59.12	59.07	60.04	30- 40	38.29	89.93	30.9,30.9
50	60.65	62.87	62.07	61.91	60.14	59.38	58.90	59.30	40- 50	46.92	136.8	47,47
60	61.00	62.87	61.70	62.18	61.20	60.61	59.79	60.13	50- 60	54.58	191.4	65.7,65.7
70	52.68	47.70	43.67	52.45	57.38	61.41	60.63	59.39	60- 70	59.16	250.6	86,86
80	3.856	3.891	0.3458	5.054	5.033	29.73	29.00	22.31	70- 80	37.47	288.1	98.9,98.9
90	0.0501	0.0688	0.0561	0.0622	0.0502	0.0375	0.0312	0.0499	80- 90	3.180	291.2	100,100
100	0.1377	0.1313	0.0698	0.1369	0.0814	0.0750	0.0624	0.0809	90-100	0.0790	291.3	100,100
110	0	0	0	0	0	0	0	0	100-110	0.0051	291.3	100,100
120	0	0	0	0	0	0	0	0	110-120	0	291.3	100,100
130	0	0	0	0	0	0	0	0	120-130	0	291.3	100,100
140	0	0	0	0	0	0	0	0	130-140	0	291.3	100,100
150	0	0	0	0	0	0	0	0	140-150	0	291.3	100,100
160	0	0	0	0	0	0	0	0	150-160	0	291.3	100,100
170	0	0	0	0	0	0	0	0	160-170	0	291.3	100,100
180	0	0	0	0	0	0	0	0	170-180	0	291.3	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-07-31

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:3.0000V I:0.6900A P:2.0700W PF:1.0000 Freq:0Hz Lamp Flux:291.327x1 lm		
NAME: 600-026 (Round Lens)	TYPE:	WEIGHT:1
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.:	SUR.:34.5*25.5	Shielding Angle:

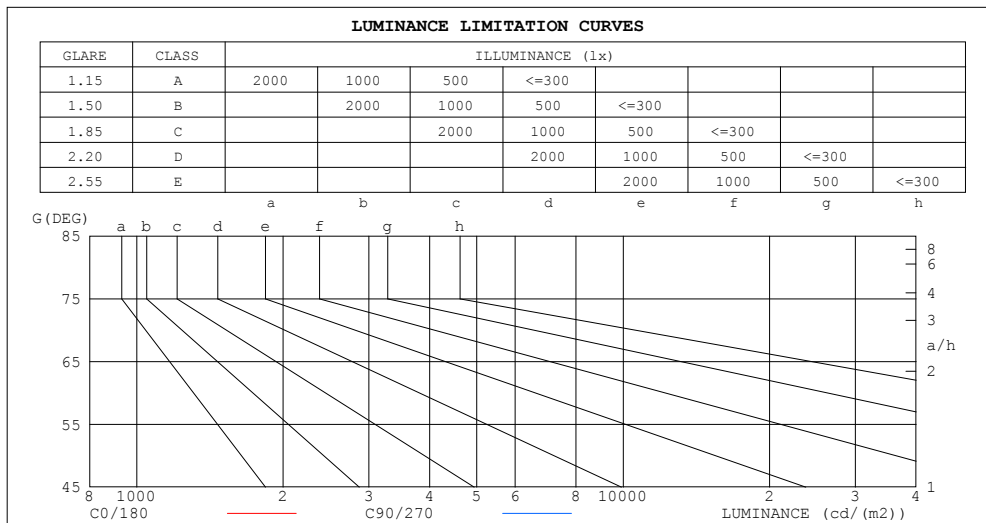

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	20	1
80	29	3
75	162	90
70	204	170
65	190	181
60	161	164
55	140	144
50	125	128
45	114	117


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2019-07-31

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:3.0000V I:0.6900A P:2.0700W PF:1.0000 Freq:0Hz Lamp Flux:291.327x1 lm		
NAME: 600-026 (Round Lens)	TYPE:	WEIGHT:1
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.:	SUR.:34.5*25.5	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.01	.96	.92	.99	.95	.90	.95	.91	.88	.91	.88	.85	.87	.85	.82	.80
2.0	.86	.78	.71	.84	.76	.70	.80	.74	.68	.77	.71	.67	.73	.69	.65	.63
3.0	.73	.64	.56	.71	.63	.56	.68	.61	.55	.65	.59	.54	.63	.57	.53	.50
4.0	.63	.53	.46	.62	.53	.45	.59	.51	.45	.57	.50	.44	.55	.48	.43	.41
5.0	.56	.45	.38	.54	.45	.38	.52	.44	.37	.50	.43	.37	.48	.42	.36	.34
6.0	.49	.39	.32	.48	.39	.32	.46	.38	.32	.45	.37	.31	.43	.36	.31	.29
7.0	.44	.35	.28	.43	.34	.28	.42	.33	.27	.40	.33	.27	.39	.32	.27	.25
8.0	.40	.31	.24	.39	.30	.24	.38	.30	.24	.37	.29	.24	.35	.29	.24	.22
9.0	.36	.28	.22	.36	.27	.21	.35	.27	.21	.33	.26	.21	.32	.26	.21	.19
10.0	.33	.25	.19	.33	.25	.19	.32	.24	.19	.31	.24	.19	.30	.23	.19	.17

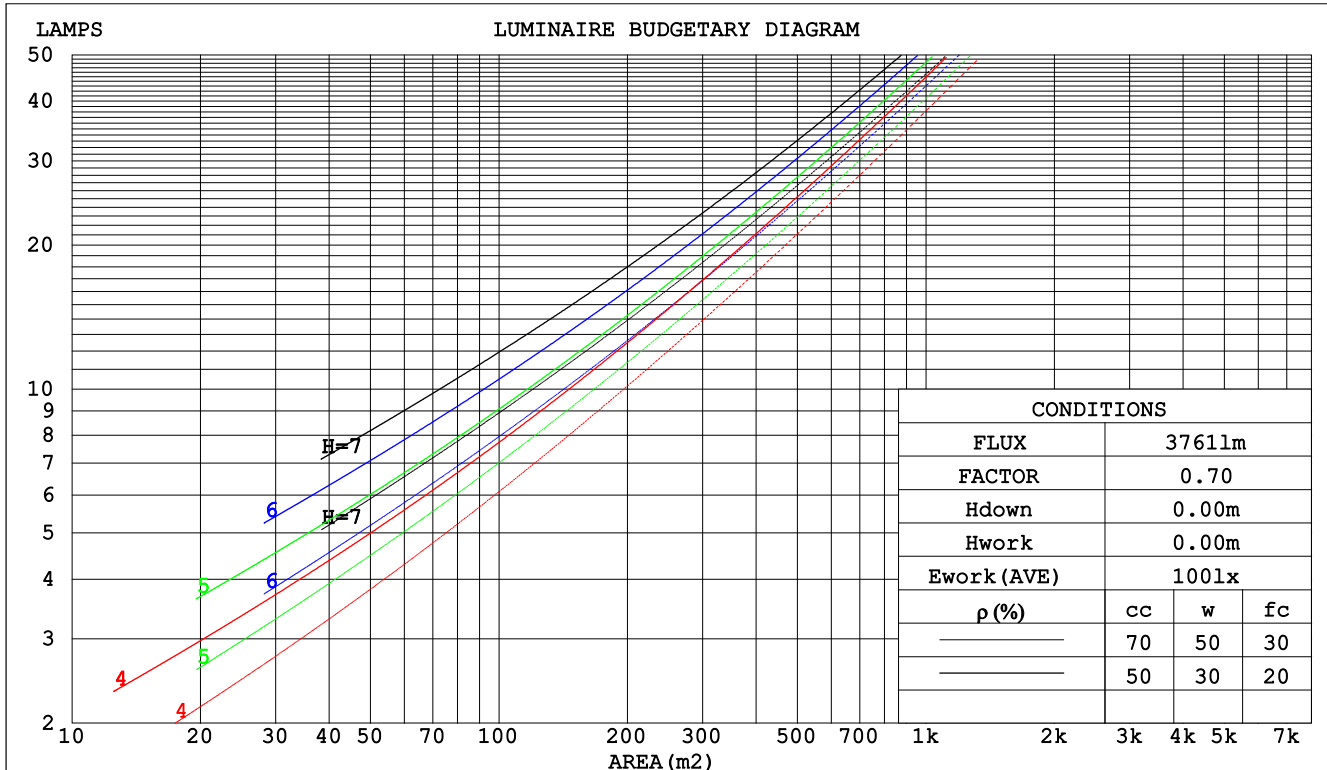

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-07-31

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:3.0000V I:0.6900A P:2.0700W PF:1.0000 Freq:0Hz Lamp Flux:291.327x1 lm					
NAME: 600-026 (Round Lens)			TYPE:		WEIGHT:1
SPEC.:5000K			DIM.:		SERIAL No.:
MFR.:			SUR.:34.5*25.5		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.357	.203	.064	.350	.200	.063	.337	.193	.062	.324	.187	.060	.313	.181	.058		
2.0	.338	.185	.057	.332	.183	.056	.320	.178	.055	.308	.173	.054	.298	.169	.053		
3.0	.310	.165	.049	.304	.163	.049	.293	.159	.048	.283	.155	.048	.274	.152	.047		
4.0	.282	.147	.043	.277	.145	.043	.268	.142	.042	.259	.139	.042	.250	.136	.041		
5.0	.258	.131	.038	.253	.130	.038	.245	.127	.038	.237	.125	.037	.229	.122	.037		
6.0	.236	.119	.034	.232	.117	.034	.225	.115	.034	.218	.113	.033	.211	.111	.033		
7.0	.218	.108	.031	.214	.107	.030	.208	.105	.030	.201	.103	.030	.195	.101	.030		
8.0	.202	.099	.028	.199	.098	.028	.193	.096	.027	.187	.095	.027	.181	.093	.027		
9.0	.188	.091	.025	.185	.090	.025	.179	.089	.025	.174	.087	.025	.169	.086	.025		
10.0	.175	.084	.023	.173	.083	.023	.168	.082	.023	.163	.081	.023	.159	.080	.023		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.184	.156	.131	.157	.134	.113	.108	.092	.078	.062	.053	.045	.020	.017	.015	
2.0	.179	.132	.093	.153	.114	.080	.105	.079	.056	.060	.046	.033	.019	.015	.011	
3.0	.172	.115	.069	.148	.099	.060	.101	.069	.042	.059	.040	.025	.019	.013	.008	
4.0	.165	.102	.054	.142	.088	.047	.098	.061	.033	.056	.036	.019	.018	.012	.006	
5.0	.158	.092	.043	.135	.080	.038	.093	.056	.027	.054	.033	.016	.017	.011	.005	
6.0	.150	.084	.036	.129	.073	.031	.089	.051	.022	.052	.030	.013	.017	.010	.004	
7.0	.143	.077	.031	.123	.067	.027	.085	.047	.019	.049	.028	.011	.016	.009	.004	
8.0	.136	.071	.027	.117	.062	.023	.081	.043	.017	.047	.026	.010	.015	.008	.003	
9.0	.129	.066	.024	.111	.058	.021	.077	.040	.015	.045	.024	.009	.015	.008	.003	
10.0	.123	.062	.021	.106	.054	.019	.074	.038	.013	.043	.022	.008	.014	.007	.003	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2019-07-31

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:3.0000V I:0.6900A P:2.0700W PF:1.0000 Freq:0Hz Lamp Flux:291.327x1 lm										
NAME: 600-026 (Round Lens)						TYPE:		WEIGHT:1		
SPEC.:5000K						DIM.:		SERIAL No.:		
MFR.:						SUR.:34.5*25.5		Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	7.0	8.8	7.3	9.0	9.2	7.1	8.8	7.4	9.0	9.3
3H	9.8	11.4	10.1	11.6	11.9	9.4	11.0	9.7	11.2	11.5
4H	10.5	12.1	10.9	12.3	12.6	9.8	11.3	10.1	11.6	11.8
6H	10.5	12.0	10.9	12.2	12.5	9.7	11.1	10.0	11.4	11.7
8H	10.5	11.9	10.8	12.2	12.5	9.6	11.0	10.0	11.3	11.6
12H	10.4	11.8	10.8	12.1	12.4	9.6	10.9	9.9	11.2	11.5
4H 2H	8.1	9.6	8.4	9.9	10.1	8.1	9.6	8.4	9.9	10.2
3H	10.8	12.1	11.1	12.4	12.7	10.4	11.7	10.8	12.0	12.4
4H	11.5	12.7	11.9	13.1	13.4	10.8	12.0	11.2	12.4	12.7
6H	11.5	12.6	11.9	13.0	13.4	10.7	11.8	11.1	12.2	12.6
8H	11.5	12.5	11.9	12.9	13.3	10.7	11.7	11.1	12.1	12.5
12H	11.5	12.4	11.9	12.8	13.2	10.6	11.6	11.1	12.0	12.4
8H 4H	11.6	12.6	12.0	13.0	13.4	11.0	12.0	11.4	12.4	12.8
6H	11.7	12.5	12.1	12.9	13.4	10.9	11.8	11.4	12.2	12.6
8H	11.6	12.4	12.1	12.8	13.3	10.9	11.6	11.3	12.1	12.5
12H	11.6	12.3	12.1	12.7	13.2	10.8	11.5	11.3	11.9	12.4
12H 4H	11.6	12.5	12.0	12.9	13.3	10.9	11.9	11.4	12.3	12.7
6H	11.6	12.4	12.1	12.8	13.3	10.9	11.6	11.3	12.1	12.5
8H	11.6	12.3	12.1	12.7	13.2	10.9	11.5	11.3	12.0	12.4
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.3 / - 0.5					+ 0.5 / - 0.7				

CIE Pub.117, 291.3 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -4.3)

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2019-07-31

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:3.0000V I:0.6900A P:2.0700W PF:1.0000 Freq:0Hz Lamp Flux:291.327x1 lm		
NAME: 600-026 (Round Lens)	TYPE:	WEIGHT:1
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.:	SUR.:34.5*25.5	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) k(RI) × RCR = 5									
k = 0.60	50	37	30	49	37	29	48	37	29	22
0.80	60	47	38	59	46	38	57	45	38	30
1.00	68	55	47	67	55	47	64	57	46	38
1.25	76	63	55	74	63	55	71	61	54	45
1.50	82	70	61	80	69	61	76	67	60	51
2.00	90	79	72	88	78	71	84	76	69	60
2.50	95	85	78	92	84	77	88	81	75	66
3.00	99	91	84	96	89	83	92	86	81	72
4.00	104	97	92	101	95	90	97	92	88	78
5.00	107	101	97	104	99	95	100	96	92	82
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004										
Suspended										
SHRNM = 1.25										

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2019-07-31

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:3.0000V I:0.6900A P:2.0700W PF:1.0000 Freq:0Hz Lamp Flux:291.327x1 lm		
NAME: 600-026 (Round Lens)	TYPE:	WEIGHT:1
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.:	SUR.:34.5*25.5	Shielding Angle:

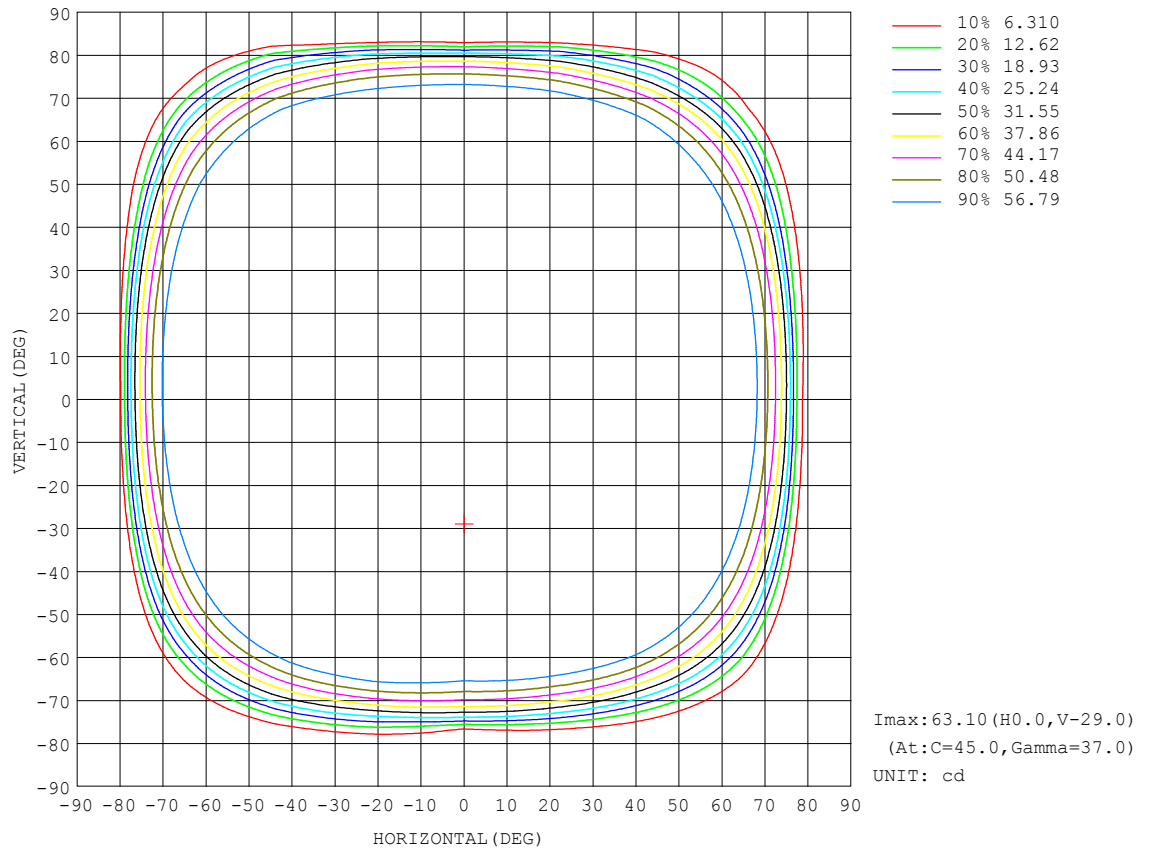


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2019-07-31

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

AAI Figure

Test:U:3.0000V I:0.6900A P:2.0700W PF:1.0000 Freq:0Hz Lamp Flux:291.327x1 lm		
NAME: 600-026 (Round Lens)	TYPE:	WEIGHT:1
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.:	SUR.:34.5*25.5	Shielding Angle:

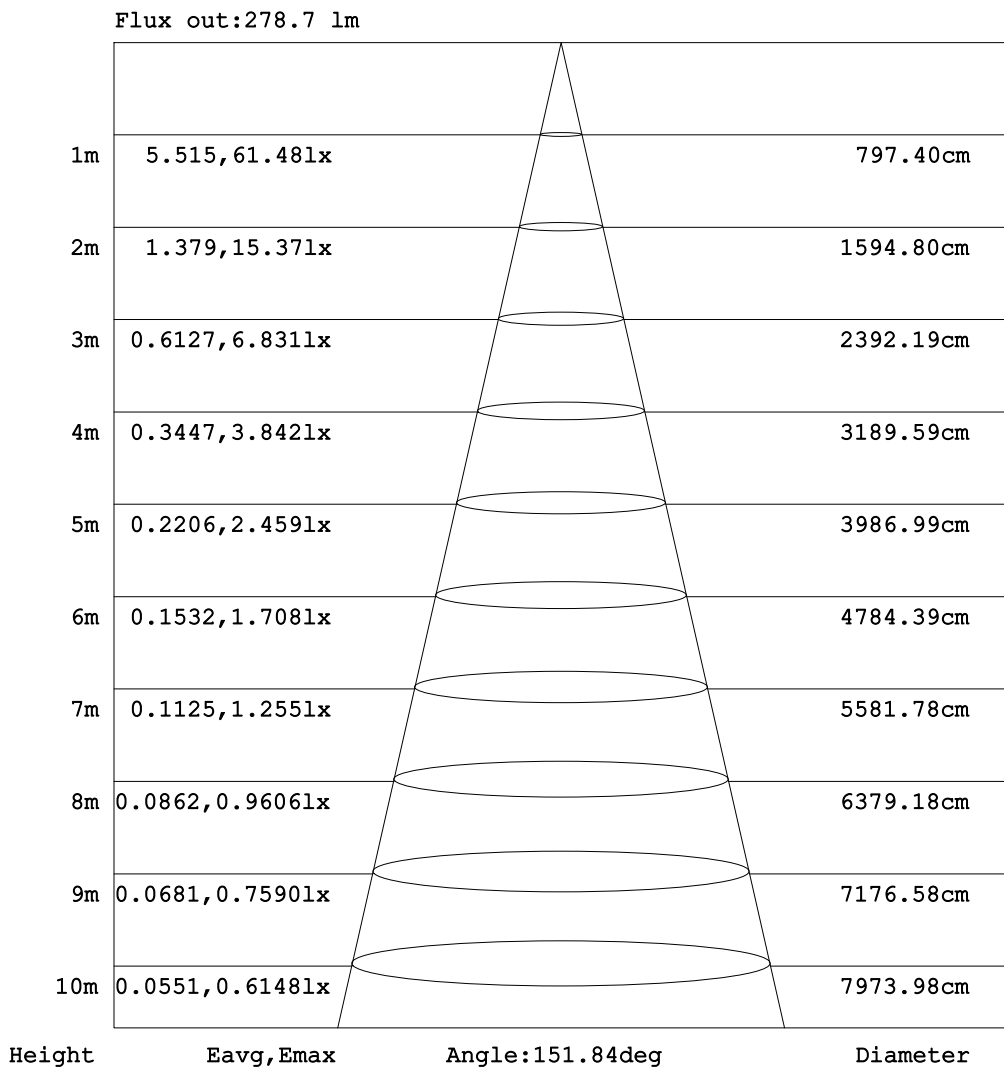


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2019-07-31

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:3.0000V I:0.6900A P:2.0700W PF:1.0000 Freq:0Hz Lamp Flux:291.327x1 lm		
NAME: 600-026 (Round Lens)	TYPE:	WEIGHT:1
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.:	SUR.:34.5*25.5	Shielding Angle:

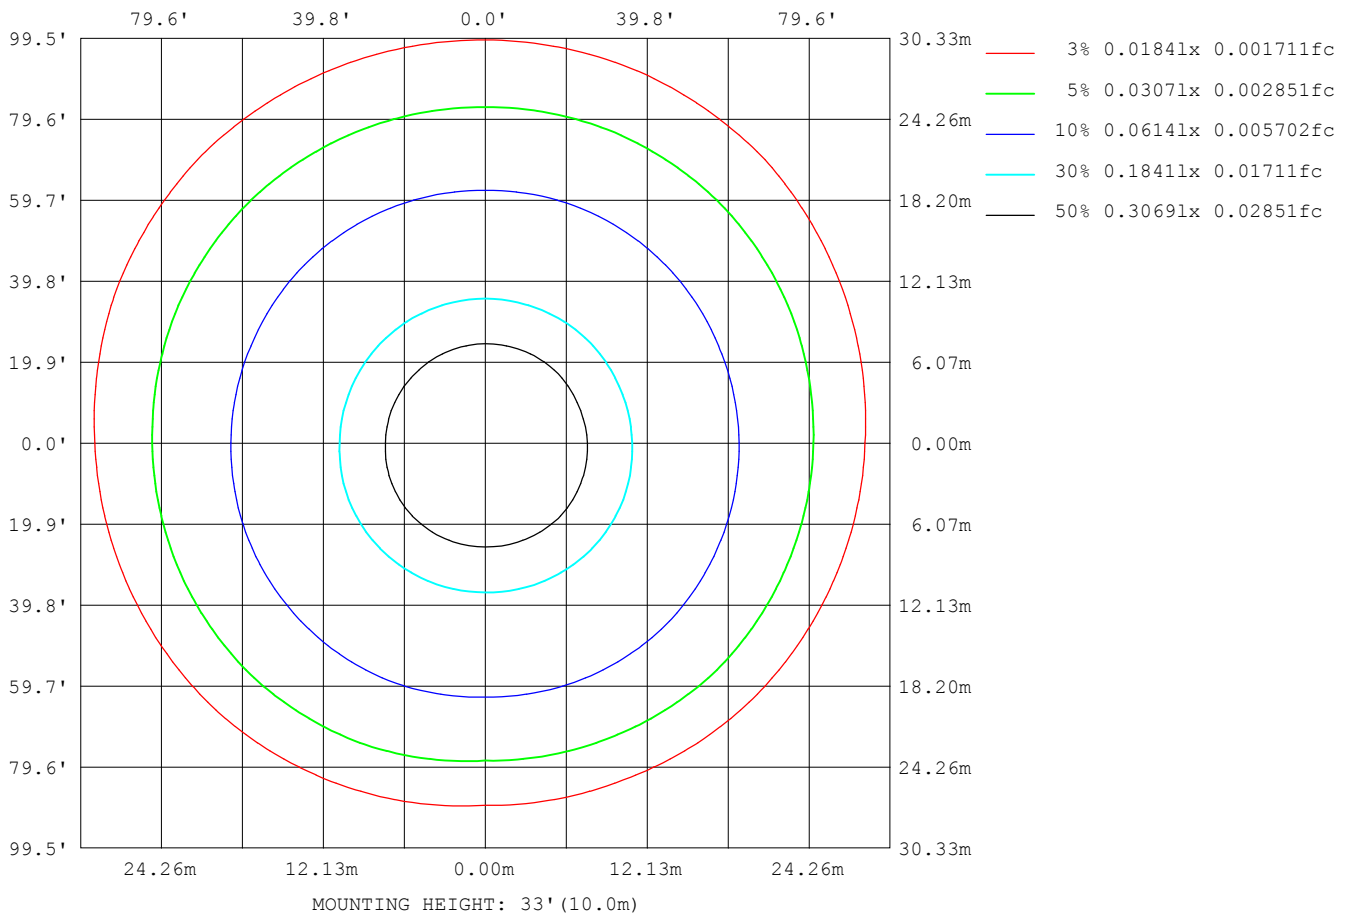

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-07-31

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:3.0000V I:0.6900A P:2.0700W PF:1.0000 Freq:0Hz Lamp Flux:291.327x1 lm		
NAME: 600-026 (Round Lens)	TYPE:	WEIGHT:1
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.:	SUR.:34.5*25.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	192
L_0~180 (75) av	184
L_0~180 (85) av	17
L_90~270 (65) av	186
L_90~270 (75) av	179
L_90~270 (85) av	1
L_45 (65) av	192
L_45 (75) av	197
L_45 (85) av	17

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-07-31

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

Planar Illuminance Curve

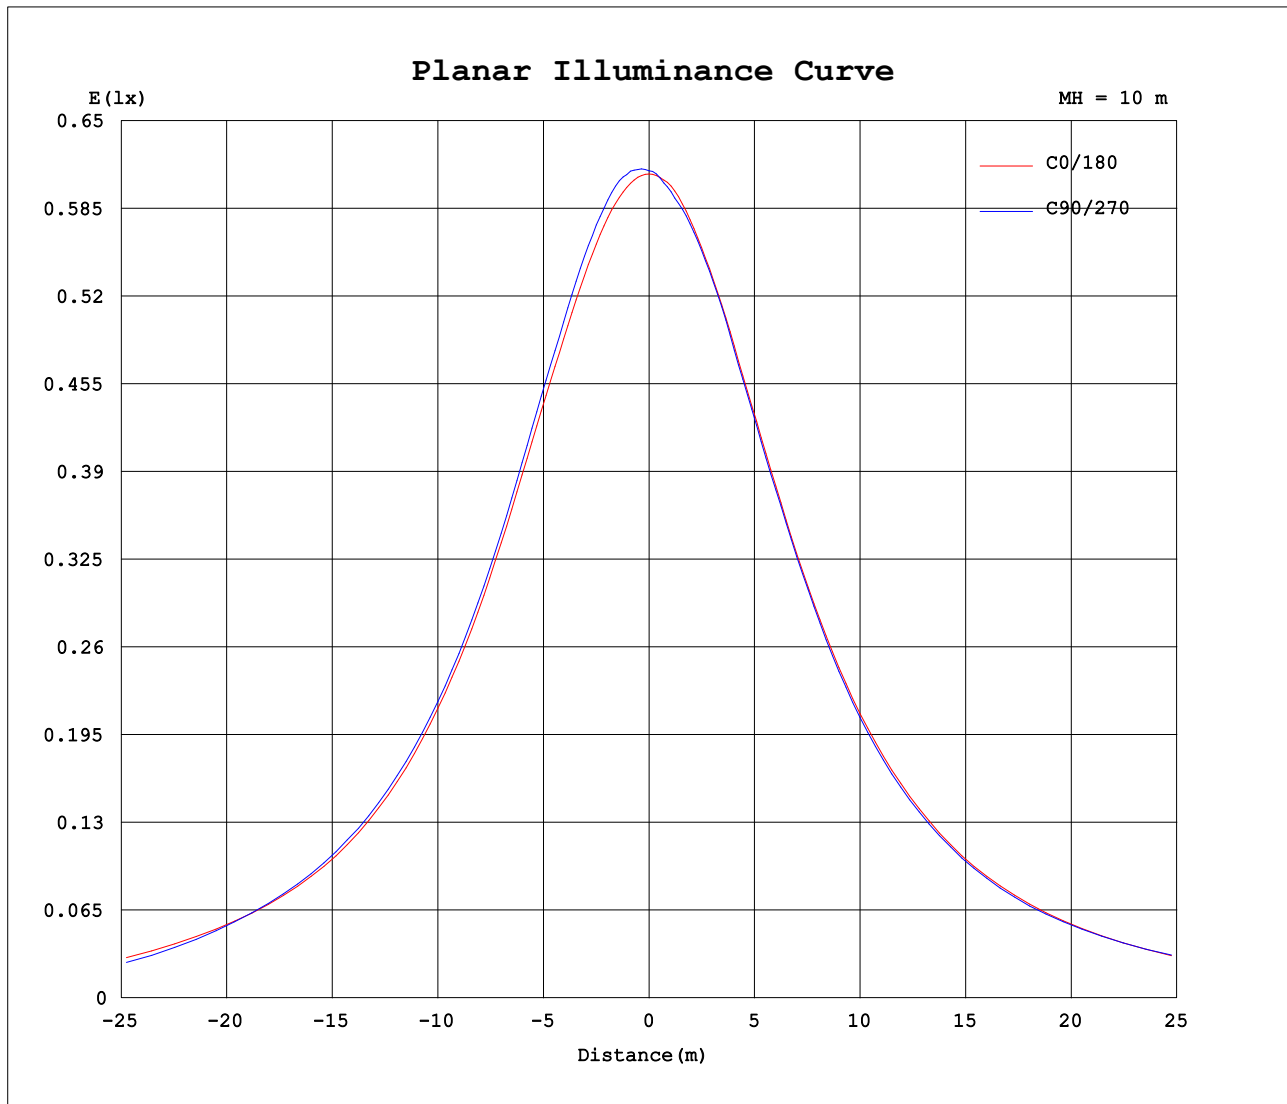

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2019-07-31

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
Humidity: 65.0%
Test Distance: 8.690m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:3.0000V I:0.6900A P:2.0700W PF:1.0000 Freq:0Hz Lamp Flux:291.327x1 lm		
NAME: 600-026 (Round Lens)	TYPE:	WEIGHT:1
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.:	SUR.:34.5*25.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3			
5	61.3	61.6	61.7	61.8	62.0	62.0	61.8	61.6	61.4	61.1	60.8	60.8	60.8	60.9	61.0	61.2			
10	61.4	61.7	62.0	62.3	62.5	62.3	62.0	61.8	61.3	60.9	60.5	60.4	60.7	60.7	60.7	61.1			
15	61.4	61.8	62.3	62.6	62.7	62.4	62.1	61.8	61.1	60.5	60.5	60.5	60.6	60.5	60.8	61.0			
20	61.4	61.9	62.7	62.7	62.8	62.6	62.3	61.8	60.9	60.4	60.3	60.0	60.5	60.5	60.7	60.8			
25	61.7	62.3	62.8	62.9	63.0	62.6	62.4	61.7	60.6	60.1	59.7	59.7	60.1	60.0	60.5	60.7			
30	61.8	62.5	63.0	63.0	63.0	62.6	62.2	61.6	60.5	59.8	59.4	59.4	59.8	60.0	60.1	60.5			
35	61.6	62.6	63.1	62.8	62.6	62.4	61.9	61.1	60.1	59.6	59.2	59.3	59.5	59.6	60.0	60.1			
40	61.1	62.2	63.2	62.6	62.3	62.1	61.8	60.8	59.9	59.4	59.1	59.0	59.1	59.3	60.0	59.6			
45	60.9	62.2	63.0	62.6	62.1	61.9	61.8	60.8	59.8	59.3	59.1	58.9	58.8	58.9	59.4	59.3			
50	60.6	62.1	62.9	62.5	62.1	62.1	61.9	61.1	60.1	59.5	59.4	59.1	58.9	58.6	59.3	59.3			
55	60.5	62.0	63.0	62.5	62.1	62.3	62.0	61.3	60.5	59.9	60.0	59.5	59.3	59.2	59.6	59.3			
60	61.0	62.0	62.9	62.3	61.7	62.5	62.2	61.7	61.2	60.4	60.6	60.1	59.8	60.1	60.1	59.9			
65	60.5	60.3	60.5	59.0	57.7	60.6	61.4	61.5	61.3	61.4	61.6	61.3	60.7	61.1	60.9	60.1			
70	52.7	49.9	47.7	44.6	43.7	48.1	52.4	54.5	57.4	60.3	61.4	61.0	60.6	60.4	59.4	56.0			
75	31.8	27.5	23.5	20.6	17.5	24.4	30.8	34.5	39.8	47.9	52.9	53.1	52.3	51.0	46.7	39.8			
80	3.86	4.69	3.89	1.12	0.35	1.54	5.05	5.94	5.03	20.9	29.7	31.1	29.0	28.1	22.3	10.2			
85	1.29	1.26	0.07	0.06	0.06	0.06	0.06	1.30	0.91	2.41	2.97	0.02	0.02	0.04	1.41	2.55			
90	0.05	0.08	0.07	0.10	0.06	0.09	0.06	0.07	0.05	0.02	0.04	0.01	0.03	0.02	0.05	0.03			
95	0.05	0.14	0.07	0.13	0.09	0.14	0.06	0.12	0.08	0.03	0.08	0.02	0.06	0.03	0.08	0.03			
100	0.14	0.04	0.13	0.05	0.07	0.04	0.14	0.04	0.08	0.07	0.08	0.06	0.06	0.06	0.08	0.11			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2019-07-31

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks: