


START Panel UGR19 600x600 3600Lm 840 LILO
0042184

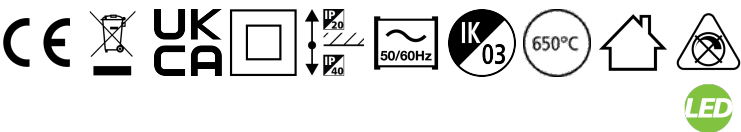

Features

- START Panel is a range of backlit LED panels used in recessed ceilings. Ideal for general indoor applications such as corridors, breakrooms, offices and meeting rooms. Luminaire dimensions are compatible with common ceiling installation, and the shallow design makes it easy to install in low ceilings. 3600Lm; 36W; 100Lm/W; Drive current: 750mA; Average lifespan: 100.000Hrs; 4000K;CRI 80; Glare control <19; IK03; IP40 (from the front); SDCM<3; Class II; Loop in loop out connector for quick installation.


Product Overview

Product name	START Panel UGR19 600x600 3600Lm 840 LILO
Technology	LED
Housing	Aluminium, Steel
Mount	Ceiling recessed mounting
General application	Education, Office
ETIM Class	EC002892
E-number FI	4278355
Fixture luminous flux (lm)	3600
Luminaire efficacy (lm/W)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	90
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	36
Electrical protection	Class II
Control gear type	LED driver constant current

START Panel UGR19 600x600 3600Lm 840 LILO
0042184


Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9003
IP rating	IP40/20
IK rating	IK03
Product EAN number	5410288421841
Warranty	5 years
Dimming method	N/A

Photometry

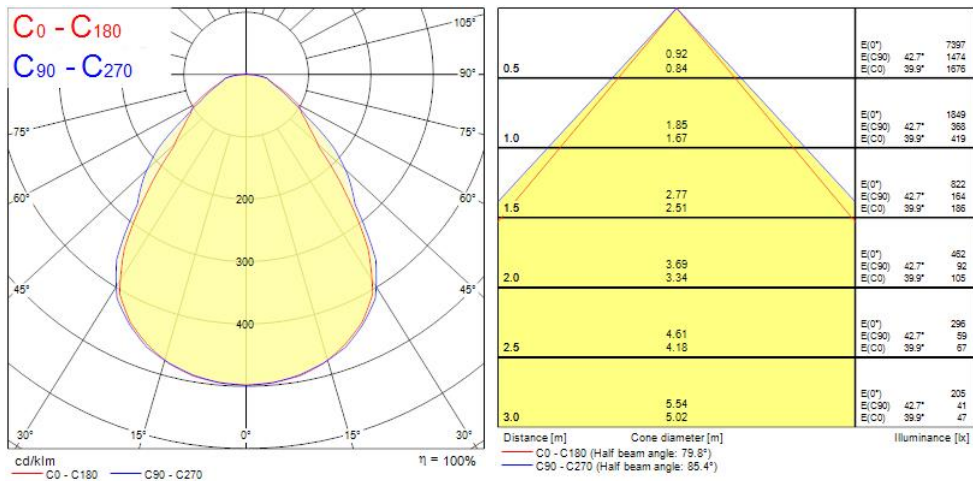

START Panel UGR19 600x600 3600Lm 840 LILO
0042184

Technical drawings

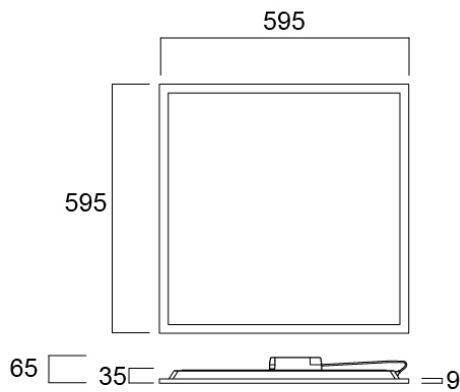

Data table

GENERAL DATA

Product name	START Panel UGR19 600x600 3600Lm 840 LILO
Technology	LED
Housing	Aluminium, Steel
Mount	Ceiling recessed mounting
General application	Education, Office
Operating temperature range (°C)	-10°C...+45°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4278355
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	3600
Luminaire efficacy (lm/W)	100
Correlated colour temperature (k)	4000

START Panel UGR19 600x600 3600Lm 840 LILO 0042184

Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	90
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0

ELECTRICAL DATA

Total power consumption (W)	36
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	15.0
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	750
Inrush Current (A)	13.2
Inrush Duration (µs)	240
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	43
Max. products per 13A C Breaker	57
Max. products per 16A C Breaker	70
Max. products per 20A C Breaker	88
Max. products per 10A B Breaker	25
Max. products per 13A B Breaker	33
Max. products per 16A B Breaker	41
Max. products per 20A B Breaker	20

START Panel UGR19 600x600 3600Lm 840 LILO 0042184

LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	71000

PHYSICAL DATA

Housing colour	RAL9003
IP rating	IP40/20
IK rating	IK03
Diffuser finish	Prismatic
Diffuser material	Other
Nominal Product Length (mm)	595
Nominal Product Width (mm)	595
Nominal Product Height (mm)	35
Weight (kg)	1.948

PACKAGING

Product EAN number	5410288421841
Packaging single length / height (cm)	60.0
Packaging single width (cm)	3.8
Packaging single depth (cm)	64.5
DUN14 (inner)	15410288421848
Units per outer package	4
Packaging outer length / height (cm)	69.5
Packaging outer width (cm)	17.5
Packaging outer depth (cm)	65.0

SAFETY DATA

Glow Wire Test (°C)	650
Optimal operating condition (°C)	-10-45
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No

SYLVANIA

START Panel UGR19 600x600 3600Lm 840 LILO
0042184

Light your world