


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:2.8600V I:0.5720A P:1.6350W PF:0.4000 Freq:0Hz Lamp Flux:260.007x1 lm		
NAME: 600-027_029_Oval Lens	TYPE:3W	WEIGHT:1
SPEC.:5000K	DIM.: 148mm*48mm	SERIAL No.:1
MFR.: Tronix Lighting	SUR.:19*11	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 159.03 lm/W			
MODEL	600-027_029_OL	I _{max} (cd)	320.4	S/MH(C0/180)	2.93
NOMINAL POWER(W)	3	LOR(%)	100.0	S/MH(C90/270)	1.02
RATED VOLTAGE(V)	200-240	TOTAL FLUX(lm)	260.01	η UP,DN(C0-180)	0.0,45.2
NOMINAL FLUX(lm)	260.007	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,54.7
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	1.00
TEST VOLTAGE(V)	2.86	η down(%)	99.9	CIBSE SHR MAX	1.15

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

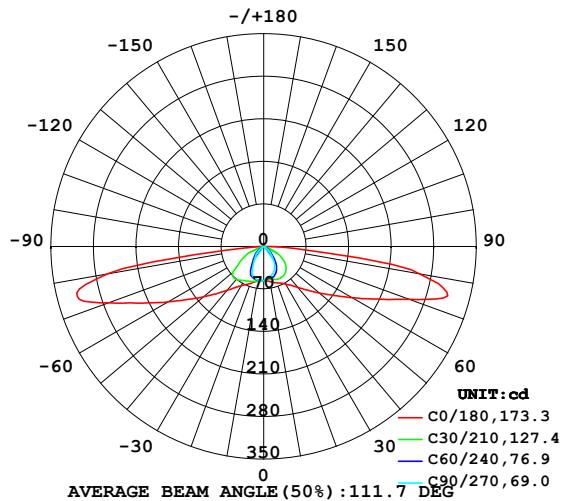

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

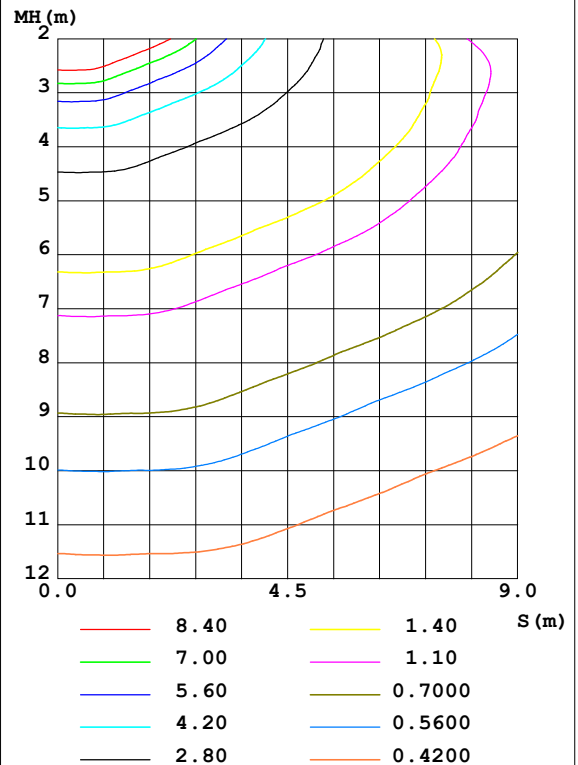

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2020-03-05

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
 Humidity: 65.0%
 Test Distance: 8.690m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	58.70	54.06	51.41	52.17	57.77	57.66	56.43	58.73	0- 10	5.333	5.333	2.05,2.05
20	63.89	55.22	46.54	52.84	65.01	57.08	52.72	57.81	10- 20	15.93	21.27	8.18,8.18
30	71.55	48.45	36.25	46.73	74.92	55.41	34.66	53.32	20- 30	25.24	46.51	17.9,17.9
40	88.45	37.07	22.07	37.64	94.27	38.10	21.57	34.88	30- 40	31.22	77.73	29.9,29.9
50	119.2	23.76	12.64	24.76	129.0	23.93	11.20	20.91	40- 50	35.85	113.6	43.7,43.7
60	169.3	12.71	3.654	11.41	182.8	12.49	4.418	13.27	50- 60	40.16	153.7	59.1,59.1
70	255.4	3.016	2.294	3.019	272.2	3.012	2.484	2.915	60- 70	44.86	198.6	76.4,76.4
80	260.9	2.088	1.340	2.015	260.5	2.089	1.284	2.084	70- 80	45.89	244.5	94,94
90	2.724	0.0187	0.0012	0	0.4261	0.0030	0	0.0030	80- 90	15.30	259.8	99.9,99.9
100	0.5317	0.0998	0	0	0.0710	0	0	0	90-100	0.1945	260.0	100,100
110	0	0	0	0	0	0	0	0	100-110	0.0074	260.0	100,100
120	0	0	0	0	0	0	0	0	110-120	0	260.0	100,100
130	0	0	0	0	0	0	0	0	120-130	0	260.0	100,100
140	0	0	0	0	0	0	0	0	130-140	0	260.0	100,100
150	0	0	0	0	0	0	0	0	140-150	0	260.0	100,100
160	0	0	0	0	0	0	0	0	150-160	0	260.0	100,100
170	0	0	0	0	0	0	0	0	160-170	0	260.0	100,100
180	0	0	0	0	0	0	0	0	170-180	0	260.0	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2020-03-05

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:2.8600V I:0.5720A P:1.6350W PF:0.4000 Freq:0Hz Lamp Flux:260.007x1 lm		
NAME: 600-027_029_Oval Lens	TYPE:3W	WEIGHT:1
SPEC.:5000K	DIM.: 148mm*48mm	SERIAL No.:1
MFR.: Tronix Lighting	SUR.:19*11	Shielding Angle:

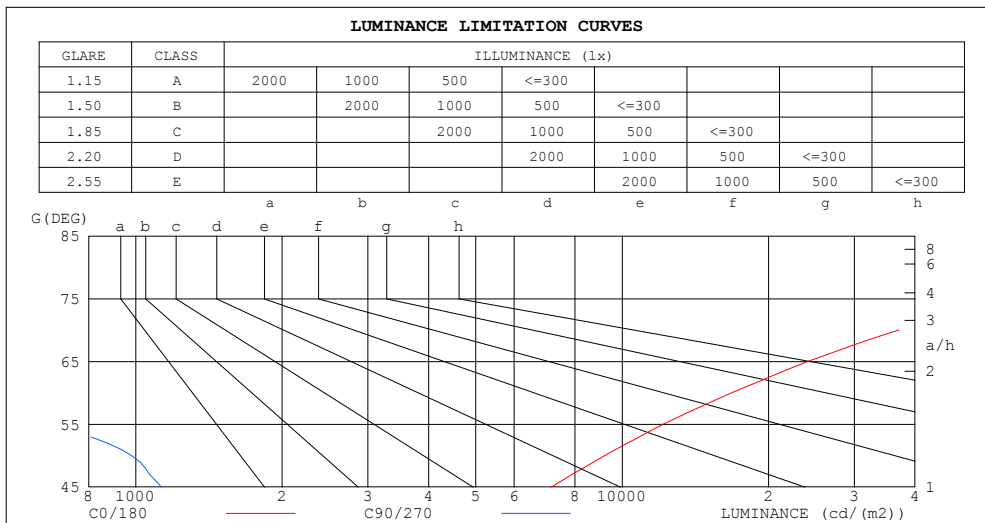

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	42042	624
80	74579	384
75	60106	333
70	37067	334
65	24092	348
60	16805	364
55	12156	655
50	9204	979
45	7154	1129


C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2020-03-05

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:2.8600V I:0.5720A P:1.6350W PF:0.4000 Freq:0Hz Lamp Flux:260.007x1 lm		
NAME: 600-027_029_Oval Lens	TYPE:3W	WEIGHT:1
SPEC.:5000K	DIM.: 148mm*48mm	SERIAL No.:1
MFR.: Tronix Lighting	SUR.:19*11	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	.98	.92	.87	.96	.90	.86	.91	.87	.83	.87	.84	.80	.83	.80	.78	.75
2.0	.82	.73	.66	.80	.72	.65	.76	.69	.64	.73	.67	.62	.70	.65	.60	.58
3.0	.70	.60	.52	.68	.59	.52	.65	.57	.50	.62	.55	.50	.59	.54	.49	.46
4.0	.61	.50	.42	.59	.50	.42	.57	.48	.41	.54	.47	.41	.52	.45	.40	.38
5.0	.54	.43	.36	.52	.43	.35	.50	.41	.35	.48	.40	.34	.46	.39	.34	.32
6.0	.48	.38	.30	.47	.37	.30	.45	.36	.30	.43	.35	.30	.41	.35	.29	.27
7.0	.43	.33	.26	.42	.33	.26	.41	.32	.26	.39	.31	.26	.38	.31	.26	.23
8.0	.39	.30	.23	.38	.29	.23	.37	.29	.23	.36	.28	.23	.34	.28	.23	.21
9.0	.36	.27	.21	.35	.27	.21	.34	.26	.21	.33	.26	.20	.32	.25	.20	.18
10.0	.33	.24	.19	.32	.24	.19	.31	.24	.18	.30	.23	.18	.29	.23	.18	.16

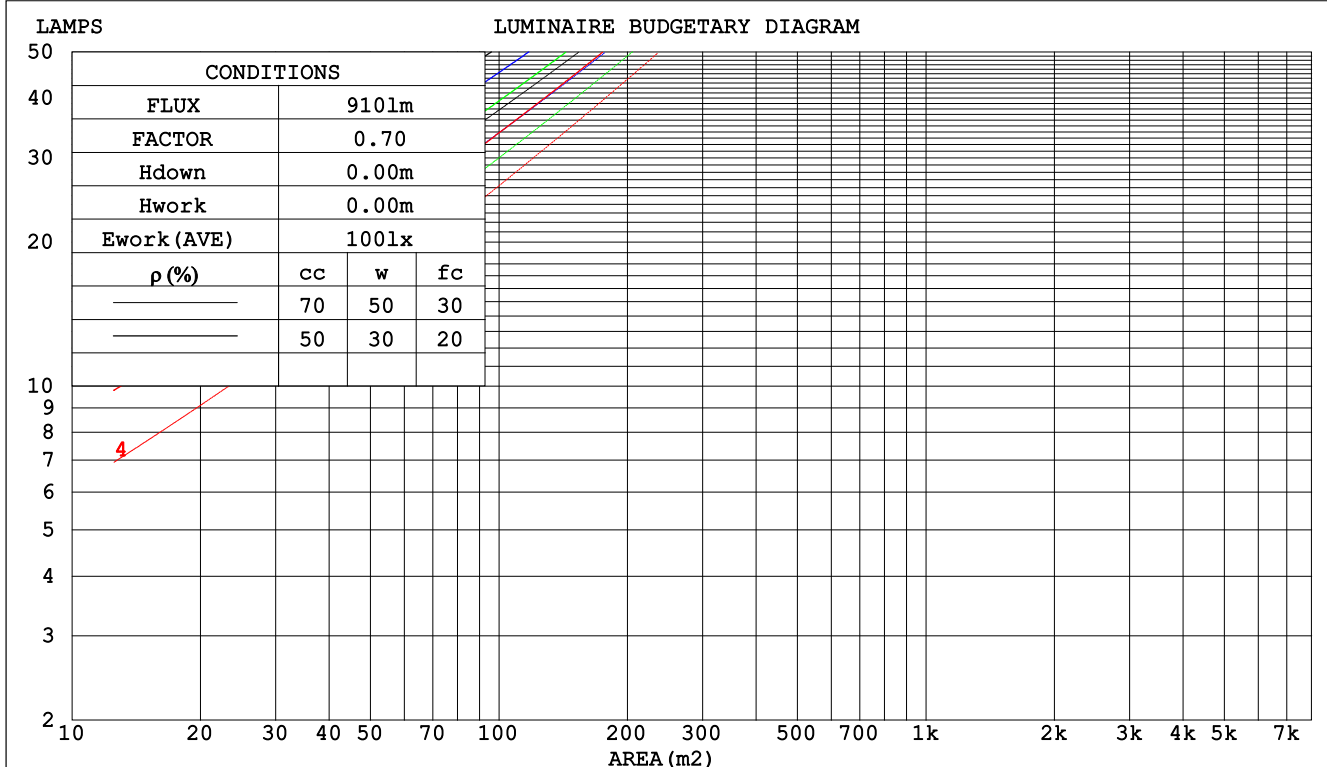

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2020-03-05

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:2.8600V I:0.5720A P:1.6350W PF:0.4000 Freq:0Hz Lamp Flux:260.007x1 lm					
NAME: 600-027_029_Oval Lens			TYPE:3W		WEIGHT:1
SPEC.:5000K			DIM.: 148mm*48mm		SERIAL No.:1
MFR.: Tronix Lighting			SUR.:19*11		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.420	.239	.076	.412	.235	.075	.398	.229	.073	.386	.222	.071	.374	.217	.070	
2.0	.372	.204	.062	.365	.201	.062	.352	.196	.061	.341	.191	.060	.330	.187	.059	
3.0	.329	.175	.053	.323	.173	.052	.312	.169	.051	.302	.166	.051	.293	.162	.050	
4.0	.294	.153	.045	.289	.151	.045	.279	.148	.044	.270	.145	.044	.261	.142	.043	
5.0	.265	.135	.039	.261	.134	.039	.252	.131	.039	.244	.129	.038	.236	.126	.038	
6.0	.241	.121	.035	.237	.120	.034	.229	.118	.034	.222	.115	.034	.215	.113	.034	
7.0	.221	.109	.031	.217	.108	.031	.211	.106	.031	.204	.105	.030	.198	.103	.030	
8.0	.204	.100	.028	.201	.099	.028	.195	.097	.028	.189	.096	.028	.183	.094	.027	
9.0	.189	.092	.026	.186	.091	.025	.181	.089	.025	.176	.088	.025	.171	.087	.025	
10.0	.176	.085	.023	.174	.084	.023	.169	.083	.023	.164	.082	.023	.160	.080	.023	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.189	.156	.126	.161	.134	.109	.110	.092	.075	.063	.053	.044	.020	.017	.014	
2.0	.183	.132	.089	.157	.114	.077	.108	.079	.054	.062	.046	.031	.020	.015	.010	
3.0	.177	.115	.067	.151	.099	.058	.104	.069	.040	.060	.040	.024	.019	.013	.008	
4.0	.169	.103	.052	.145	.089	.045	.099	.062	.032	.058	.036	.019	.019	.012	.006	
5.0	.160	.093	.043	.138	.080	.037	.095	.056	.026	.055	.033	.016	.018	.011	.005	
6.0	.152	.084	.036	.131	.073	.031	.090	.051	.022	.052	.030	.013	.017	.010	.004	
7.0	.144	.078	.031	.124	.067	.027	.086	.047	.019	.050	.028	.011	.016	.009	.004	
8.0	.137	.072	.027	.118	.062	.024	.082	.044	.017	.048	.026	.010	.015	.008	.003	
9.0	.130	.067	.024	.112	.058	.021	.078	.041	.015	.045	.024	.009	.015	.008	.003	
10.0	.124	.062	.022	.107	.054	.019	.074	.038	.013	.043	.023	.008	.014	.007	.003	

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2020-03-05

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:2.8600V I:0.5720A P:1.6350W PF:0.4000 Freq:0Hz Lamp Flux:260.007x1 lm										
NAME: 600-027_029_Oval Lens					TYPE:3W			WEIGHT:1		
SPEC.:5000K					DIM.: 148mm*48mm			SERIAL No.:1		
MFR.: Tronix Lighting					SUR.:19*11			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.0	24.8	23.3	25.0	25.2	7.8	9.5	8.0	9.7	10.0
3H	28.7	30.4	29.0	30.6	30.9	7.8	9.5	8.1	9.7	10.0
4H	32.3	33.9	32.7	34.2	34.5	7.9	9.5	8.2	9.8	10.0
6H	35.4	36.9	35.8	37.2	37.5	8.0	9.5	8.4	9.8	10.1
8H	36.5	38.0	36.9	38.3	38.6	8.1	9.5	8.4	9.8	10.2
12H	36.9	38.3	37.3	38.6	38.9	8.2	9.6	8.6	10.0	10.3
4H 2H	22.7	24.2	23.0	24.5	24.8	9.9	11.5	10.2	11.7	12.0
3H	28.4	29.8	28.7	30.1	30.4	9.9	11.3	10.3	11.6	12.0
4H	32.0	33.3	32.4	33.6	34.0	10.0	11.3	10.4	11.6	12.0
6H	35.1	36.3	35.5	36.7	37.0	10.1	11.3	10.5	11.6	12.0
8H	36.3	37.4	36.8	37.8	38.2	10.2	11.3	10.6	11.7	12.1
12H	36.8	37.8	37.2	38.2	38.6	10.3	11.4	10.8	11.8	12.2
8H 4H	31.8	32.9	32.3	33.3	33.7	10.5	11.6	11.0	12.0	12.4
6H	35.0	35.9	35.4	36.3	36.8	10.8	11.7	11.2	12.1	12.6
8H	36.2	37.1	36.7	37.5	38.0	10.9	11.8	11.4	12.2	12.7
12H	36.7	37.5	37.2	37.9	38.4	11.2	11.9	11.6	12.3	12.8
12H 4H	31.8	32.8	32.2	33.2	33.6	10.6	11.6	11.0	12.0	12.4
6H	34.9	35.8	35.4	36.2	36.7	10.9	11.7	11.3	12.1	12.6
8H	36.2	36.9	36.7	37.4	37.9	11.1	11.8	11.6	12.3	12.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.3 / - 0.3					+ 1.5 / - 2.2				
1.5H	+ 0.6 / - 1.5					+ 1.7 / - 1.3				
2.0H	+ 1.5 / - 3.9					+ 2.1 / - 3.1				

CIE Pub.117, 260.0 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -4.7)

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2020-03-05

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:


```

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

Test:U:2.8600V I:0.5720A P:1.6350W PF:0.4000 Freq:0Hz Lamp Flux:260.007x1 lm		
NAME: 600-027_029_Oval Lens	TYPE:3W	WEIGHT:1
SPEC.:5000K	DIM.: 148mm*48mm	SERIAL No.:1
	SUR.:19*11	Shielding Angle:

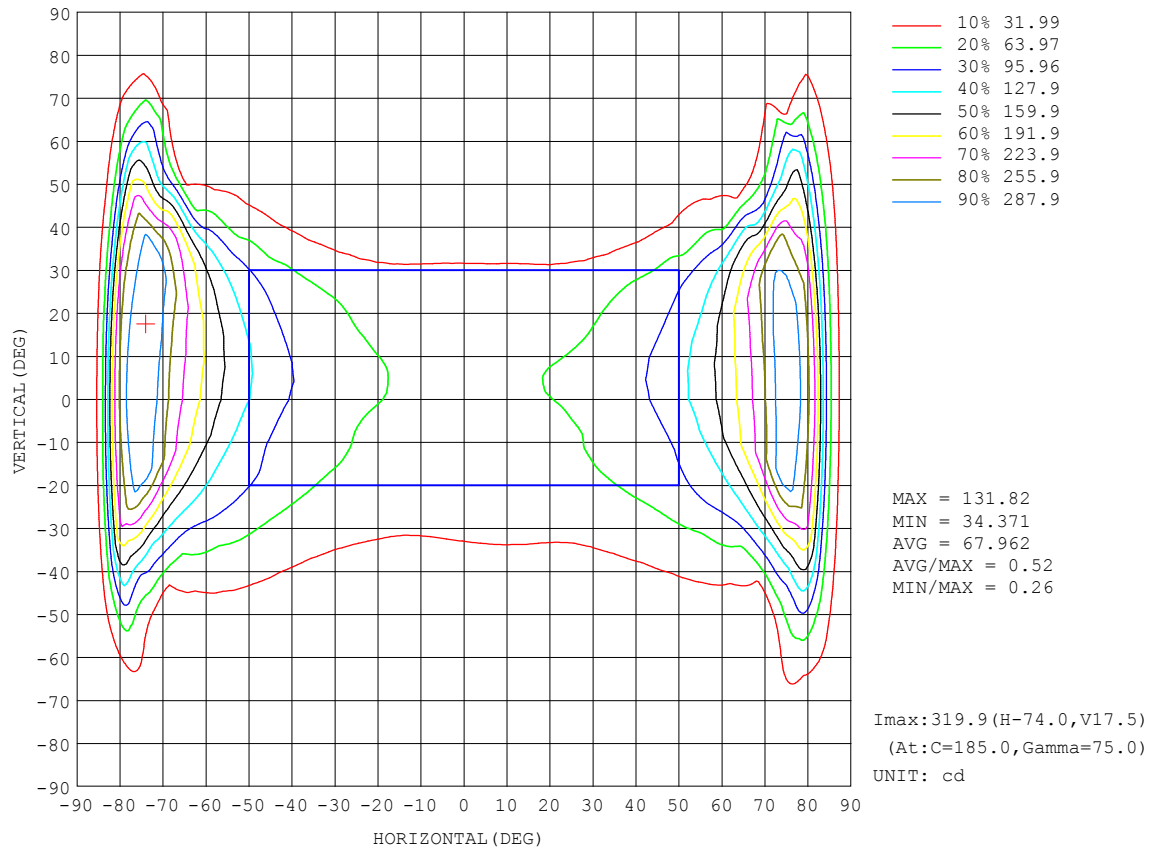


C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2020-03-05

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

AAI Figure

Test:U:2.8600V I:0.5720A P:1.6350W PF:0.4000 Freq:0Hz Lamp Flux:260.007x1 lm		
NAME: 600-027_029_Oval Lens	TYPE:3W	WEIGHT:1
SPEC.:5000K	DIM.: 148mm*48mm	SERIAL No.:1
MFR.: Tronix Lighting	SUR.:19*11	Shielding Angle:

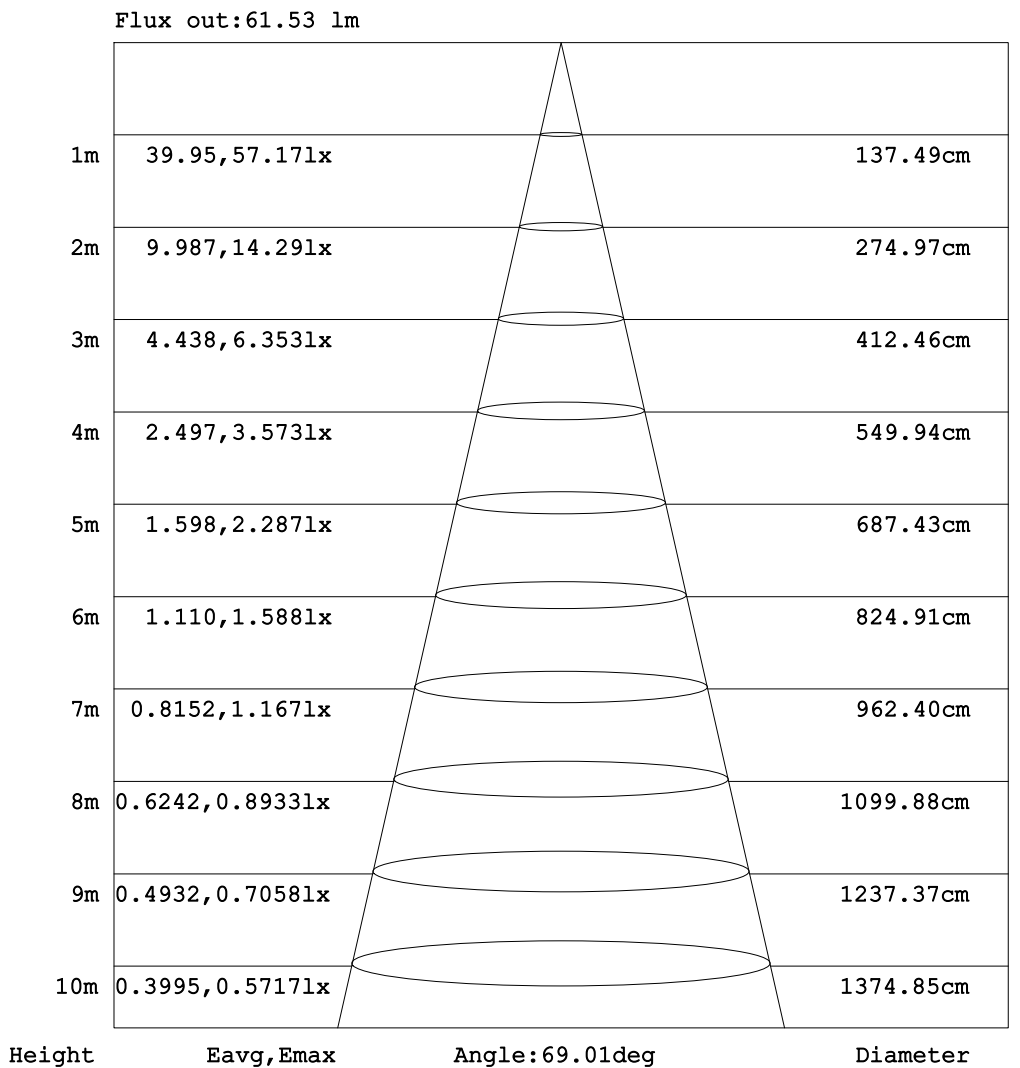


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2020-03-05

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
 Humidity:65.0%
 Test Distance:8.690m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:2.8600V I:0.5720A P:1.6350W PF:0.4000 Freq:0Hz Lamp Flux:260.007x1 lm		
NAME: 600-027_029_Oval Lens	TYPE:3W	WEIGHT:1
SPEC.:5000K	DIM.: 148mm*48mm	SERIAL No.:1
MFR.: Tronix Lighting	SUR.:19*11	Shielding Angle:

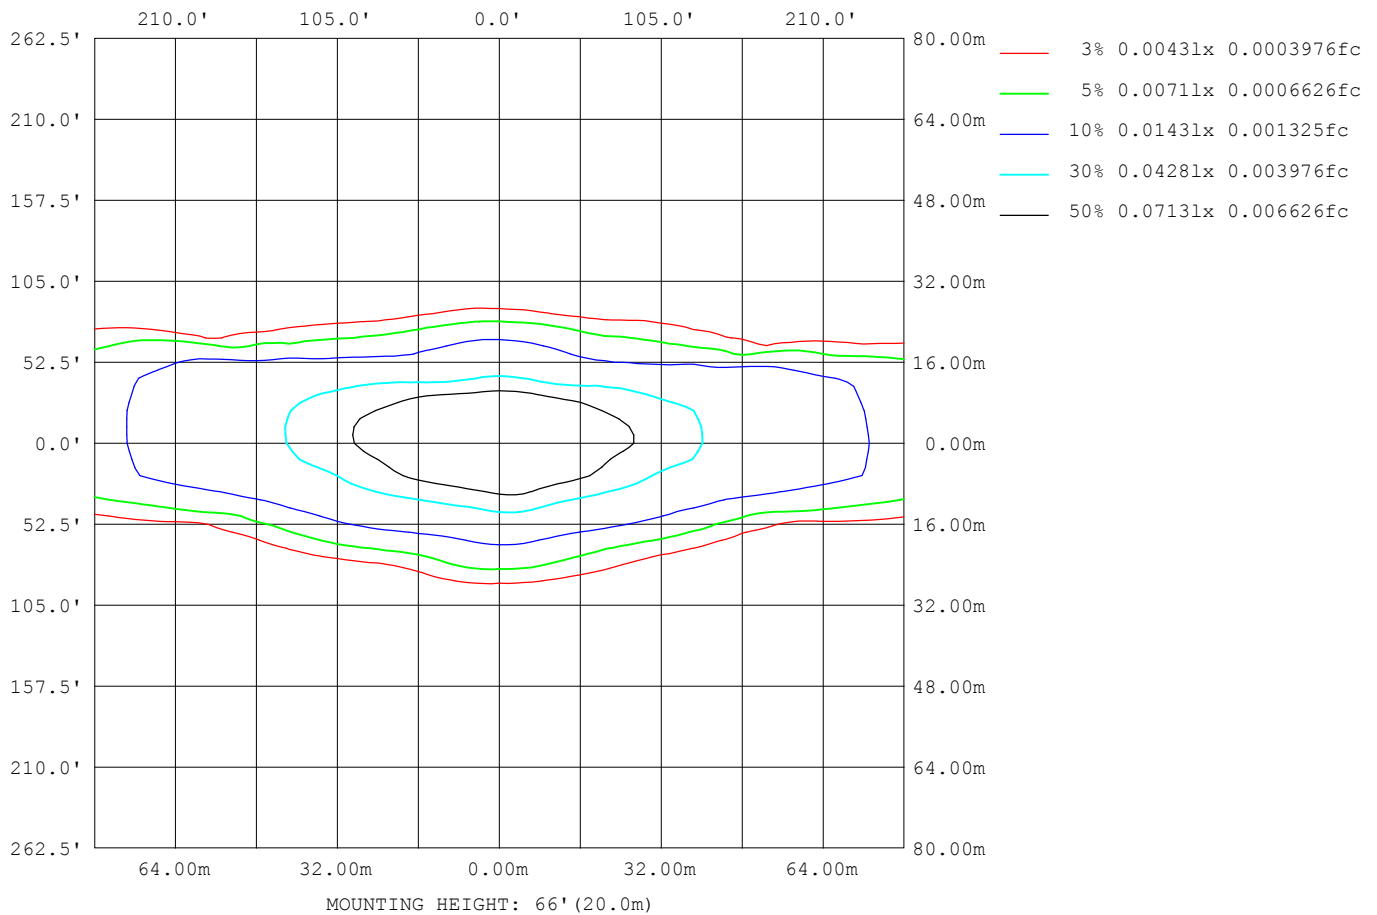

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2020-03-05

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:2.8600V I:0.5720A P:1.6350W PF:0.4000 Freq:0Hz Lamp Flux:260.007x1 lm		
NAME: 600-027_029_Oval Lens	TYPE:3W	WEIGHT:1
SPEC.:5000K	DIM.: 148mm*48mm	SERIAL No.:1
MFR.: Tronix Lighting	SUR.:19*11	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	25067
L_0~180 (75) av	60677
L_0~180 (85) av	31902
L_90~270 (65) av	370
L_90~270 (75) av	336
L_90~270 (85) av	660
L_45 (65) av	636
L_45 (75) av	471
L_45 (85) av	855

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2020-03-05

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

Planar Illuminance Curve

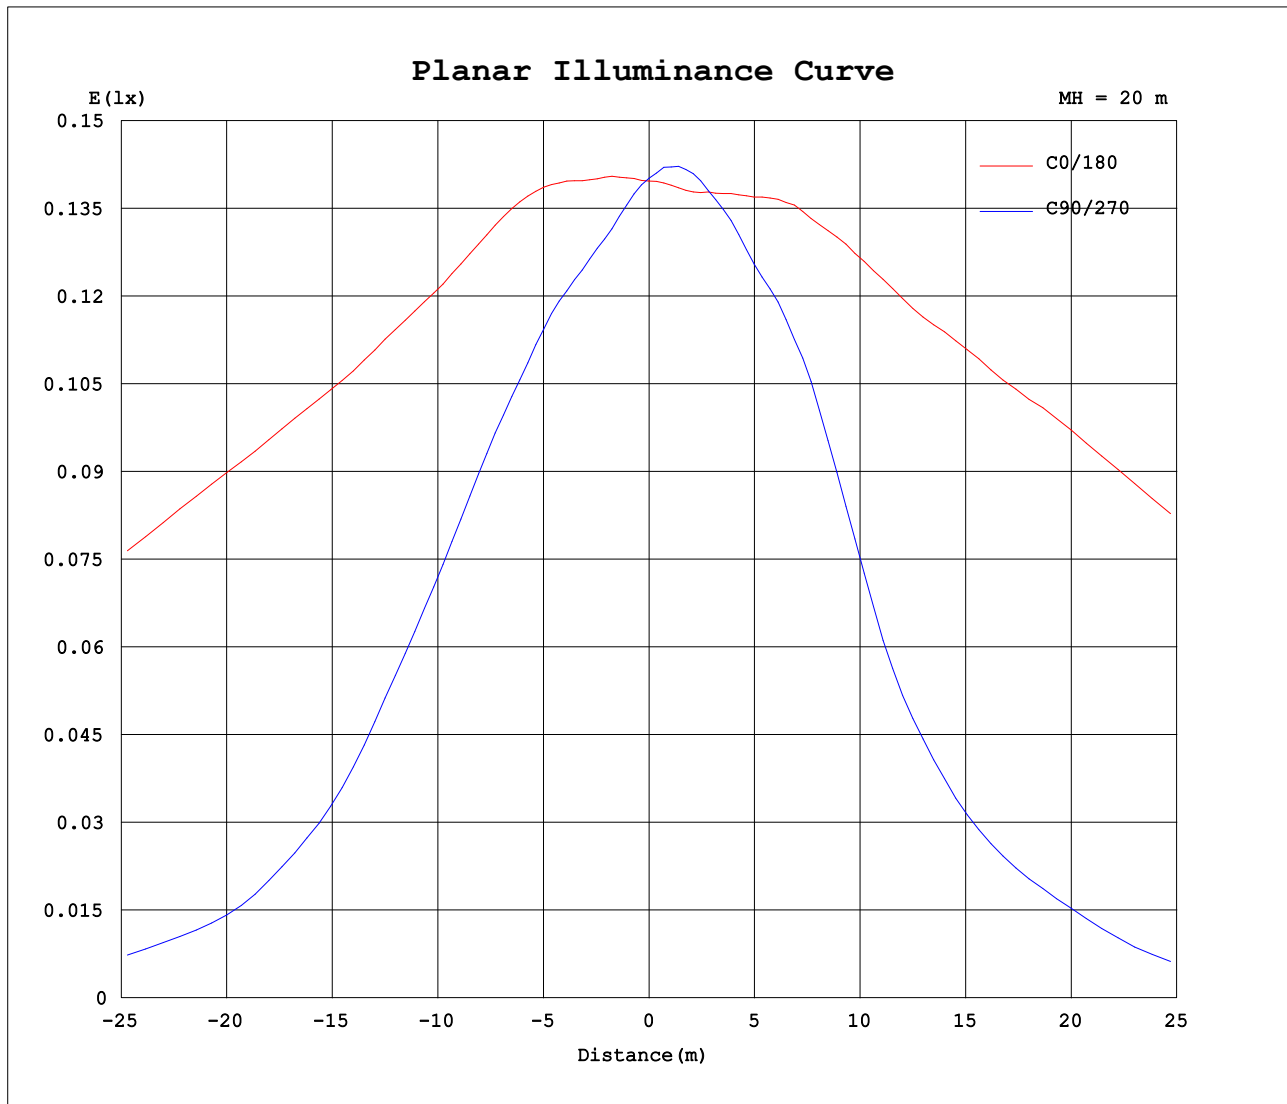

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2020-03-05

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
Humidity: 65.0%
Test Distance: 8.690m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:2.8600V I:0.5720A P:1.6350W PF:0.4000 Freq:0Hz Lamp Flux:260.007x1 lm		
NAME: 600-027_029_Oval Lens	TYPE:3W	WEIGHT:1
SPEC.:5000K	DIM.: 148mm*48mm	SERIAL No.:1
MFR.: Tronix Lighting	SUR.:19*11	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0
5	57.0	56.8	56.5	56.4	56.0	55.9	55.6	55.2	55.0	54.7	54.4	54.2	54.0	53.8	53.7	53.6	53.3	53.3	53.2
10	58.7	58.2	57.8	57.3	56.6	56.1	55.4	55.0	54.6	54.1	53.7	53.4	53.0	52.6	52.4	52.0	51.7	51.5	51.4
15	61.4	60.6	59.7	58.9	58.0	57.2	56.2	55.7	55.1	54.7	54.2	53.7	53.0	52.4	51.7	51.0	50.4	50.0	49.6
20	63.9	62.7	61.5	60.5	59.1	58.3	57.7	57.4	56.4	55.2	54.3	53.0	51.7	50.5	49.4	48.5	47.7	47.1	46.5
25	66.7	65.1	63.8	62.1	60.9	60.2	59.1	57.3	55.0	52.7	50.7	49.4	48.2	46.9	45.5	44.5	43.4	42.7	41.9
30	71.6	69.3	67.2	65.2	64.1	61.9	58.8	55.2	51.4	48.4	45.8	44.0	42.5	41.3	40.1	39.0	37.9	37.0	36.3
35	78.3	75.1	72.5	70.5	67.7	63.9	58.2	51.9	46.7	43.0	39.8	37.6	35.8	34.4	32.8	31.5	30.3	29.4	28.7
40	88.4	83.4	79.3	76.2	71.8	65.0	55.9	48.2	41.7	37.1	33.1	29.8	27.4	26.0	24.8	23.9	23.0	22.4	22.1
45	102	93.9	86.2	82.8	75.5	63.9	52.2	43.4	36.3	30.6	25.9	22.4	20.2	18.7	17.6	17.1	16.4	16.3	16.0
50	119	107	96.1	89.6	76.5	59.6	47.3	37.4	29.8	23.8	19.0	16.3	14.7	14.3	13.8	13.5	13.0	12.8	12.6
55	140	128	108	95.1	73.2	54.1	40.3	29.8	22.0	17.0	14.6	13.0	11.5	10.3	9.29	8.65	7.98	7.75	7.55
60	169	156	121	96.8	64.5	45.4	31.3	21.0	15.6	12.7	10.2	8.29	6.25	4.81	3.90	3.58	3.57	3.58	3.65
65	205	193	135	85.3	51.1	32.9	20.7	14.0	9.78	6.66	4.47	3.40	3.17	3.04	3.04	2.94	2.93	2.87	2.96
70	255	243	149	59.1	30.7	17.2	10.2	6.18	3.48	3.02	2.88	2.66	2.63	2.49	2.47	2.35	2.36	2.25	2.29
75	313	305	139	24.9	10.8	5.37	3.33	2.97	2.82	2.46	2.35	2.19	2.13	1.97	1.97	1.83	1.79	1.68	1.73
80	261	252	97.7	13.7	3.91	2.88	2.46	2.24	2.28	2.09	1.94	1.78	1.74	1.59	1.56	1.40	1.38	1.27	1.34
85	73.8	67.7	34.6	20.5	5.26	2.15	1.90	1.75	1.74	1.53	1.38	1.18	1.15	1.05	1.13	1.13	0.98	1.17	1.09
90	2.72	2.57	0.71	0.52	0.93	0.36	0.31	0.18	0.12	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
95	0.53	0.46	0.38	0.42	0.51	0.41	0.27	0.23	0.08	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.53	0.13	0.06	0.12	0.45	0.14	0.34	0.29	0.14	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2020-03-05

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:2.8600V I:0.5720A P:1.6350W PF:0.4000 Freq:0Hz Lamp Flux:260.007x1 lm		
NAME: 600-027_029_Oval Lens	TYPE:3W	WEIGHT:1
SPEC.:5000K	DIM.: 148mm*48mm	SERIAL No.:1
MFR.: Tronix Lighting	SUR.:19*11	Shielding Angle:

Table--2

UNIT: cd

C (DEG) γ (DEG)	95	100	105	110	115	120	125	130	135	140	145	150	155	160	165	170	175	180	185
0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0
5	53.2	53.2	53.3	53.3	53.4	53.5	53.6	53.7	53.9	54.1	54.3	54.5	54.8	55.1	55.3	55.5	55.8	56.0	56.1
10	51.3	51.2	51.2	51.2	51.3	51.5	51.7	51.9	52.2	52.6	53.1	53.8	54.6	55.2	56.0	56.7	57.3	57.8	58.1
15	49.3	49.3	49.5	49.7	50.1	50.6	51.2	51.8	52.5	53.1	53.8	54.4	55.5	56.5	57.8	58.9	60.1	60.9	61.4
20	46.2	46.1	46.2	46.6	47.1	47.9	49.3	50.9	52.8	54.7	56.2	56.9	57.8	58.6	60.1	61.7	63.5	65.0	65.7
25	41.5	41.3	41.5	41.8	42.6	43.8	45.7	47.8	50.6	53.8	56.7	59.0	60.7	61.7	63.0	65.0	67.1	69.5	70.7
30	35.8	35.7	35.9	36.5	37.6	39.0	41.2	43.6	46.7	50.5	54.9	59.5	63.2	65.5	67.1	69.2	71.9	74.9	77.0
35	28.4	28.3	28.5	29.3	30.8	33.0	35.8	38.9	42.4	46.7	52.6	58.9	64.9	69.1	72.4	75.0	79.1	83.1	85.9
40	21.9	21.6	21.9	22.2	23.1	25.5	29.1	33.3	37.6	42.6	49.6	57.8	66.7	73.9	78.9	82.1	88.0	94.3	96.7
45	16.1	16.1	16.5	16.9	17.8	19.4	22.3	26.1	31.4	37.9	45.7	54.9	67.1	78.9	86.8	92.0	101	110	111
50	12.9	13.1	13.4	13.6	14.0	14.7	16.7	20.0	24.8	31.4	40.5	51.2	65.4	82.6	96.2	103	116	129	131
55	7.83	8.18	8.80	9.36	10.1	10.9	12.0	14.3	18.4	24.5	33.2	45.3	60.8	81.3	103	117	137	152	155
60	3.56	3.61	3.65	3.94	4.60	5.46	6.77	8.32	11.4	17.0	24.9	36.0	51.9	73.5	105	131	165	183	187
65	2.97	3.03	3.02	3.09	3.10	3.22	3.28	3.58	5.01	8.24	14.3	24.7	37.8	57.6	94.7	144	200	221	223
70	2.24	2.33	2.31	2.42	2.43	2.59	2.64	2.87	3.02	3.40	5.57	10.4	19.7	36.0	65.9	147	253	272	274
75	1.68	1.78	1.81	1.95	1.93	2.07	2.10	2.31	2.46	2.80	2.99	3.40	4.96	11.3	28.6	130	298	318	320
80	1.28	1.38	1.44	1.55	1.55	1.73	1.75	1.90	2.02	2.28	2.22	2.43	2.89	3.79	7.73	76.9	244	260	262
85	1.17	0.90	1.12	1.17	1.05	1.14	1.13	1.35	1.43	1.62	1.62	1.83	2.02	3.53	15.5	26.3	42.1	37.9	39.6
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.11	0.20	0.27	0.35	0.39	0.45	5.08	0.43	0.46
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.13	0.22	0.34	0.35	0.29	0.26	2.97	0.25	0.42
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.04	0.05	0.12	0.41	0.08	0.07	0.85	0.07	0.44
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2020-03-05

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:2.8600V I:0.5720A P:1.6350W PF:0.4000 Freq:0Hz Lamp Flux:260.007x1 lm		
NAME: 600-027_029_Oval Lens	TYPE:3W	WEIGHT:1
SPEC.:5000K	DIM.: 148mm*48mm	SERIAL No.:1
MFR.: Tronix Lighting	SUR.:19*11	Shielding Angle:

Table--3

UNIT: cd

C (DEG) γ (DEG)	190	195	200	205	210	215	220	225	230	235	240	245	250	255	260	265	270	275	280
0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0
5	56.3	56.5	56.7	56.8	56.8	56.9	57.0	57.0	57.1	57.1	57.2	57.2	57.3	57.3	57.3	57.2	57.3	57.3	57.4
10	58.4	58.4	58.3	58.4	58.3	58.2	58.0	57.7	57.2	56.9	56.5	56.5	56.4	56.5	56.4	56.5	56.4	56.6	56.7
15	61.6	61.5	61.1	60.7	59.9	59.1	58.6	57.9	57.2	56.7	55.9	55.4	54.9	54.8	54.7	54.7	54.7	54.9	55.2
20	65.6	65.4	64.6	63.5	61.7	60.0	58.4	57.1	55.9	55.1	54.2	53.6	53.1	52.9	52.7	52.7	52.7	52.8	53.2
25	70.5	69.9	67.9	65.6	63.1	60.7	58.3	56.4	54.6	52.9	51.3	49.5	47.9	46.7	45.8	45.2	45.1	45.3	46.0
30	76.7	74.7	71.4	68.5	64.9	62.0	58.9	55.4	51.1	46.7	43.0	39.8	37.7	36.0	35.3	34.8	34.7	34.7	35.3
35	84.3	80.5	76.1	71.9	68.0	63.4	57.3	49.3	41.6	36.0	32.2	30.2	29.2	28.4	27.9	27.5	27.3	27.3	27.7
40	94.4	89.3	82.9	77.3	71.0	61.7	49.5	38.1	31.9	28.3	25.8	23.9	23.1	22.4	22.0	21.7	21.6	21.3	21.5
45	108	99.6	90.6	82.8	71.4	54.1	37.8	30.7	26.0	22.5	20.7	19.6	18.9	18.5	18.1	17.5	17.3	17.2	17.4
50	126	113	99.9	86.6	66.2	42.0	30.6	23.9	20.7	18.5	16.8	14.9	13.5	12.6	11.9	11.3	11.2	11.1	11.5
55	148	130	110	86.1	50.2	33.9	23.8	19.1	15.5	12.4	10.3	8.72	7.93	7.12	6.74	6.39	6.16	6.04	6.22
60	178	152	118	70.6	40.0	26.2	18.8	12.5	8.70	7.14	6.22	5.47	4.97	4.83	4.69	4.58	4.42	4.41	4.39
65	215	179	114	50.0	30.2	17.6	8.62	5.91	4.68	4.17	3.77	3.65	3.56	3.54	3.47	3.43	3.32	3.32	3.28
70	268	212	67.2	30.2	12.1	5.94	3.70	3.01	2.75	2.76	2.70	2.73	2.65	2.66	2.58	2.58	2.48	2.54	2.53
75	307	189	21.1	7.15	4.00	3.18	2.78	2.47	2.20	2.27	2.20	2.21	2.05	1.98	1.84	1.85	1.77	1.84	1.84
80	250	119	19.5	4.35	2.77	2.20	2.10	2.09	1.82	1.93	1.84	1.86	1.66	1.59	1.40	1.37	1.28	1.35	1.36
85	62.6	52.3	0.21	1.61	1.79	1.52	1.41	1.47	1.39	1.37	1.20	1.19	1.20	1.20	1.19	1.17	1.22	1.19	1.22
90	0.42	0.45	0.27	0.24	0.11	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
95	0.29	0.40	0.35	0.25	0.17	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.08	0.43	0.15	0.27	0.08	0.07	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2020-03-05

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:2.8600V I:0.5720A P:1.6350W PF:0.4000 Freq:0Hz Lamp Flux:260.007x1 lm																	
NAME: 600-027_029_Oval Lens									TYPE:3W						WEIGHT:1		
SPEC.:5000K									DIM.: 148mm*48mm						SERIAL No.:1		
MFR.: Tronix Lighting									SUR.:19*11						Shielding Angle:		

Table--4

UNIT: cd

γ (DEG)	C (DEG)																			
	285	290	295	300	305	310	315	320	325	330	335	340	345	350	355					
0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0					
5	57.4	57.5	57.5	57.6	57.7	57.8	57.8	57.7	57.8	57.7	57.7	57.6	57.6	57.3	57.1					
10	57.0	57.2	57.5	57.8	58.1	58.4	58.7	59.1	59.3	59.4	59.5	59.5	59.5	59.3	59.1					
15	55.7	56.1	56.7	57.3	58.0	58.8	59.5	59.7	59.9	60.7	61.5	62.0	62.2	62.0	61.9					
20	53.6	54.2	54.8	55.4	56.2	56.8	57.8	58.5	59.6	60.9	62.4	63.7	64.4	64.6	64.5					
25	47.0	48.6	50.3	52.1	53.5	54.8	56.1	57.1	58.5	60.2	62.4	64.7	66.6	67.3	67.7					
30	36.2	38.0	40.3	43.2	46.3	50.0	53.3	55.7	58.2	60.7	63.4	66.6	69.8	72.0	73.0					
35	28.3	29.3	30.5	32.1	34.7	39.7	45.7	52.7	57.8	61.9	65.8	70.1	74.7	78.6	80.4					
40	21.8	22.5	23.3	24.8	27.3	30.0	34.9	44.3	55.2	63.5	69.9	75.1	81.8	87.5	90.4					
45	17.7	18.1	18.7	19.7	20.9	23.2	27.3	33.6	46.5	63.5	74.3	81.6	90.2	98.7	102					
50	12.2	13.3	14.2	15.4	16.8	18.6	20.9	26.2	35.5	54.7	76.6	88.6	100	112	118					
55	6.49	7.02	7.93	9.61	12.2	14.5	17.2	21.0	27.5	40.6	72.1	95.8	113	131	141					
60	4.44	4.51	4.67	4.87	5.48	8.08	13.3	18.6	24.4	32.2	51.8	98.9	130	157	169					
65	3.30	3.23	3.34	3.39	3.48	3.66	4.00	10.1	18.2	27.0	41.0	82.2	154	196	204					
70	2.64	2.63	2.73	2.70	2.78	2.74	2.92	3.19	4.03	10.4	24.1	46.4	167	244	256					
75	1.98	2.10	2.25	2.26	2.36	2.28	2.41	2.66	2.96	3.61	5.30	13.0	101	283	305					
80	1.57	1.66	1.89	1.88	1.97	1.88	2.08	2.16	2.14	2.50	3.81	12.3	75.6	198	260					
85	1.23	1.24	1.25	1.22	1.36	1.43	1.56	1.50	1.55	1.71	3.03	0.88	0.35	82.8	75.5					
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.14	0.24	0.32	0.32	2.27	1.74					
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.06	0.21	0.24	0.39	0.37	0.49	0.95				
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.14	0.09	0.34	0.14	0.44	0.20	0.50				
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2020-03-05

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.405.8
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks: