


START Downlight Flat IP44 Dimmable 205mm Round Recessed

Start Downlight Flat 205 IP44 2200LM 830 DIM
0054124

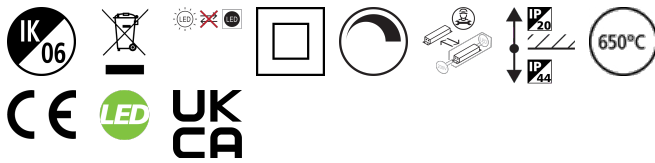


PRODUCT OVERVIEW

Product name	Start Downlight Flat 205 IP44 2200LM 830 DIM
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
E-number FI	4278501
Warranty	5 years
Fixture luminous flux (lm)	2200
Luminaire efficacy (lm/W)	92
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	24
Electrical protection	Class II
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK06
Product EAN number	5410288541242

PHOTOMETRY

START Downlight Flat IP44 Dimmable 205mm Round Recessed

Start Downlight Flat 205 IP44 2200LM 830 DIM
0054124



Distance [m]	Cone diameter [m]	E0° [lx]	E(C90) [lx]	E(C180) [lx]
0.5	1.41	3162	54.7*	308
	1.43		55.1*	296
1.0	2.82	790	54.7*	75
	2.87		55.1*	74
1.5	4.24	351	54.7*	34
	4.30		55.1*	33
2.0	5.65	198	54.7*	19
	5.73		55.1*	18
2.5	7.06	126	54.7*	12
	7.17		55.1*	12
3.0	8.47	88	54.7*	8
	8.60		55.1*	8

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 110.5°)
— C90 - C270 (Half beam angle: 105.4°)

TECHNICAL DRAWINGS

