


## VKEK-V-3P-GREEN: Synthetic Manifold 3X P Euroconus - Green

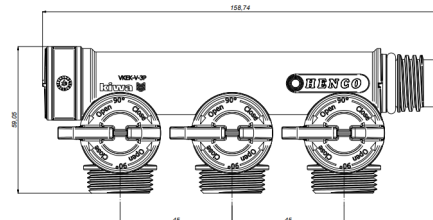

### Commercial information

With the Henco Pro-Flow Manifold, you benefit from the following features:

- Multifunctional, self-aligning design and modular: 3 circuits, downward
- A separate pipe circuit for each tap point; this avoids connections in the floor.
- 100% corrosion-free.
- Change in dew point results in a lower risk of condensation in cold water systems.
- Maximum number of connections in a very short construction length.
- Improves the balance in a system.
- Single circuit shut-off is possible, simplifying maintenance.
- Suitable for both press and push-fit applications.
- Supply in 20 mm and 26 mm - Henco dimensions internal thread x external thread.
- Drinking water certified.
- Various group connections in 3/4" Eurocone possible: Plastic screw coupling Plastic press coupling Brass press coupling Plastic push-fit coupling.
- Available with 4 different coloured handles, making it easy to mark different applications.

#### Basic unit dimensions

|            |          |
|------------|----------|
| Height     | 58 mm    |
| Length     | 159 mm   |
| Width      | 52 mm    |
| Net weight | 0.151 kg |

#### Certificates

#### Applications

Potable water, Heating, Cooling, Sanitary

#### Solutions

Building installations, Industry, Utility

## Technical characteristics

|                                    |                                    |                                      |                    |
|------------------------------------|------------------------------------|--------------------------------------|--------------------|
| Suitable for tap water             | ✓                                  | Number of branches                   | 3                  |
| Suitable for central heating water | ✓                                  | Number of branching directions       | 3                  |
| Suitable for cooling water         | ✓                                  | Distance between offset              | 45 Millimetre      |
| Suitable for compressed air        | ✗                                  | Max. medium temperature (continuous) | 95 Degrees celsius |
| Suitable for glycol                | ✓                                  | Width                                | 158.74 Millimetre  |
| Suitable for ethanol               | ✗                                  | Height                               | 88.5 Millimetre    |
| Suitable for gas                   | ✗                                  | Depth                                | 52.23 Millimetre   |
| Mounting method                    | Surface mounting                   | Length distributor                   | 158.74 Millimetre  |
| Model                              | Distributor/collector              |                                      |                    |
| Material                           | Plastic                            |                                      |                    |
| Material quality                   | Polyphenylsulfone (PPSU)           |                                      |                    |
| Surface protection                 | Untreated                          |                                      |                    |
| Shape                              | Throughflow with straight branches |                                      |                    |
| System specific                    | ✓                                  |                                      |                    |
| With fill- and drain valve         | ✗                                  |                                      |                    |
| With backflow safeguard            | ✗                                  |                                      |                    |
| With shut-off valve                | ✓                                  |                                      |                    |
| With de-aeration                   | ✗                                  |                                      |                    |
| With wall-mounting bracket         | ✗                                  |                                      |                    |
| With mounting material             | ✗                                  |                                      |                    |
| With legs                          | ✗                                  |                                      |                    |
| With adjustable floor legs         | ✗                                  |                                      |                    |
| With insulation                    | ✗                                  |                                      |                    |
| KOMO certified                     | ✗                                  |                                      |                    |
| Type approval according to BBR/EKS | ✗                                  |                                      |                    |