


START Downlight Flat IP44 Dimmable 205mm Round Recessed

Start Downlight Flat 205 IP44 2250LM 840 DIM
0054125

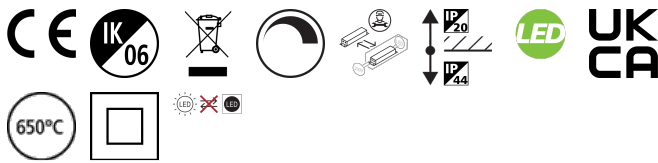

PRODUCT OVERVIEW


Product name	Start Downlight Flat 205 IP44 2250LM 840 DIM
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
E-number FI	4278502
Warranty	5 years
Fixture luminous flux (lm)	2250
Luminaire efficacy (lm/W)	94
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	24
Electrical protection	Class II
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK06
Product EAN number	5410288541259

PHOTOMETRY

START Downlight Flat IP44 Dimmable 205mm Round Recessed

Start Downlight Flat 205 IP44 2250LM 840 DIM
0054125

0.5	1.44	E(0°) E(C0)	88.2°	3211 338
1.0	2.88	E(0°) E(C0)	88.2°	803 78
1.5	4.32	E(0°) E(C0)	88.2°	387 33
2.0	5.76	E(0°) E(C0)	88.2°	201 19
2.5	7.19	E(0°) E(C0)	88.2°	133 12
3.0	8.63	E(0°) E(C0)	88.2°	89 8
Distance [m] Cone diameter [m]		Illuminance [lx]		
C0 - C180 (Half beam angle: 110.4°)				



TECHNICAL DRAWINGS

