


## Walraven RapidStrut® Connector 90° Rigid (BUP1000)

(H2825)

for rigid angle connections

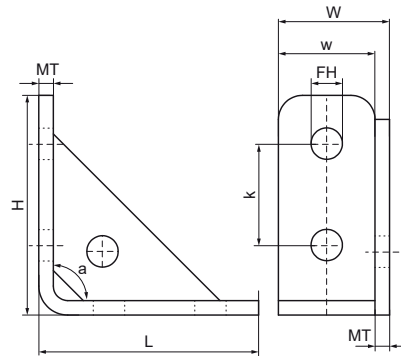

### Features & benefits

- reinforced connector to make rigid fabrications with Walraven RapidStrut® rails
- easy fitting due to rounded edges
- material: steel 1.0332
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227



| Product Number   | For Rail Type                     | Angle | Total Height | Total Width | Total Length | Material Thickness | Width | Fixing Hole | Heart To Heart Distance | Torque Moment For Installation | Maximum Allowed Load Faz | Maximum Allowed Load Fax |
|------------------|-----------------------------------|-------|--------------|-------------|--------------|--------------------|-------|-------------|-------------------------|--------------------------------|--------------------------|--------------------------|
| Reference Letter |                                   | $a$   | $H$          | $W$         | $L$          | $MT$               | $w$   | $FH$        | $k$                     | $T_{inst}$                     | $F_{a,z}$                | $F_{a,x}$                |
| Unit description |                                   | °     | mm           | mm          | mm           | mm                 | mm    | mm          | mm                      | Nm                             | N                        | N                        |
| 66588291         | 41x21, 41x41, 41x51, 41x62, 41x82 | 90    | 91           | 46          | 91           | 6.00               | 40    | 13.3        | 41                      | 30                             | 4,000                    | 3,000                    |