


Walraven RapidStrut® Connector 90° Rigid (BUP1000)

(H2825)

for rigid angle connections

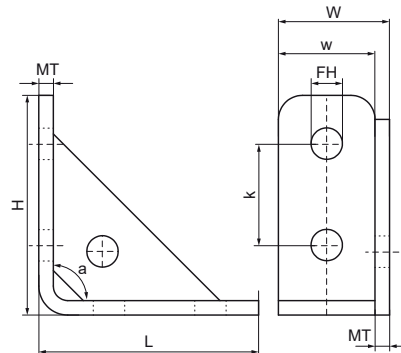

Features & benefits

- reinforced connector to make rigid fabrications with Walraven RapidStrut® rails
- easy fitting due to rounded edges
- material: steel 1.0332
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227



Product Number	NRF Number	For Rail Type	Angle	Total Height	Total Width	Total Length	Material Thickness	Width	Fixing Hole	Heart To Heart Distance	Torque Moment For Installation	Maximum Allowed Load Faz	Maximum Allowed Load Fax
Reference Letter			<i>a</i>	<i>H</i>	<i>W</i>	<i>L</i>	<i>MT</i>	<i>w</i>	<i>FH</i>	<i>k</i>	<i>T inst.</i>	<i>Fa,z</i>	<i>Fa,x</i>
Unit description			°	mm	mm	mm	mm	mm	mm	mm	Nm	N	N
66588291	3486313	41x21, 41x41, 41x51, 41x62, 41x82	90	91	46	91	6.00	40	13.3	41	30	4,000	3,000