

# Motion detector, HF, 230 V, 10 m, white

351-27360

4 year warranty

The HF motion detector with one channel is suitable for switching indoor lighting on and off. The detector is equipped with an integrated light sensor.  
Finishing colour: white


- Separate setting for the lux, the switch-off delay and the sensitivity
- 360° detection for ceiling mounting, 160° for wall mounting

Motion detector for use in light fittings, etc.

- Use of HF technology for optimal detection.
- Can easily be integrated into different devices or walls thanks to its HF detection.



### Detection range

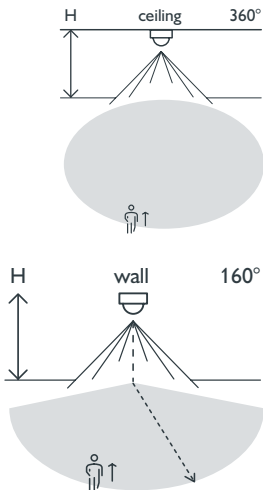

H ↓ D	Towards	
	Ceiling ↓ ↑	Wall ↑ ↑
2 m	∅ 10 m	5 m
3 m	∅ 10 m	5 m
4 m	∅ 10 m	5 m
5 m	∅ 10 m	5 m

  
230 V

  
stand-alone

  
360 °


  
2 – 5 m

**niko**

## Technical data

Article number	351-27360
Input voltage	230 Vac $\pm$ 10 %, 50 Hz
Detector output	230 V (ON/OFF)
Maximum MCB rating	10 A (limited by national installation rules)
Relay contact	N.O. (max. 4.35 A)
Maximum load incandescent and halogen lamps ( $\cos\phi=1$ )	1000 W
Maximum load economy lamps (CFLi)	100 W
Maximum load LED lamps 230 V	100 W
Light intensity range	5 lux – 2000 lux
Number of channels	1 channel
Switch-off delay	10 s – 5 min
Detection angle	360 °
Detection range (HF)	ø 10 m for ceiling mounting, 5 m for wall mounting
Ambient temperature	-20 – +70 °C
Mounting height	2 – 5 m
Dimensions (HxWxD)	90 x 52 x 35 mm
Protection degree	IP20
Marking	CE

## Dimensions

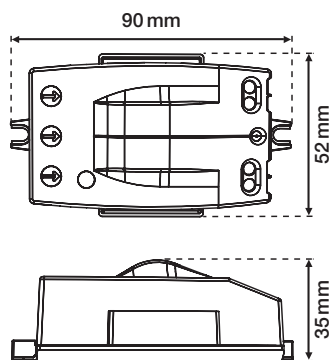

## Wiring diagram

