


START Downlight Flat Dimmable 226mm Round Surface

Start Downlight Flat 226 1700LM 830 DIM SM
0054128

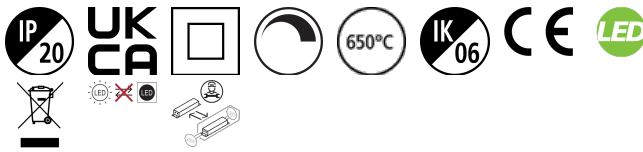


PRODUCT OVERVIEW

Product name	Start Downlight Flat 226 1700LM 830 DIM SM
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting
E-number FI	4278503
Warranty	5 years
Fixture luminous flux (lm)	1700
Luminaire efficacy (lm/W)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	17
Electrical protection	Class II
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK06
Product EAN number	5410288541280

PHOTOMETRY

START Downlight Flat Dimmable 226mm Round Surface

Start Downlight Flat 226 1700LM 830 DIM SM
0054128



Distance [m]	Cone diameter [m]	E0° [lx]	E15° [lx]	E30° [lx]	E45° [lx]	E60° [lx]	E75° [lx]	E90° [lx]
0.5	1.44 1.42	2400	228	228	228	228	228	228
1.0	2.89 2.86	610	56	56	56	56	56	56
1.5	4.33 4.28	271	25	25	25	25	25	25
2.0	5.78 5.71	162	14	14	14	14	14	14
2.5	7.22 7.14	98	9	9	9	9	9	9
3.0	8.67 8.57	68	6	6	6	6	6	6

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 110.0°)
— C90 - C270 (Half beam angle: 110.0°)

TECHNICAL DRAWINGS

