


16AX double pole and two way switches

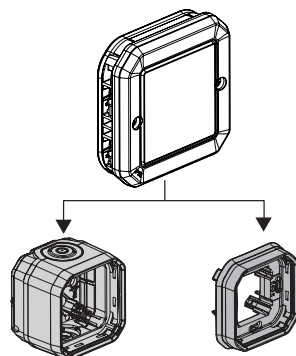


1. USE

Waterproof equipment system intended for residential and professional technical locations (garages, cellars, car parks, workshops and industrial kitchens, etc.) as well as outdoor environments (terraces, gardens, campsites, etc.).


Lighting control mechanisms with or without identification elements (indicators) or signaling elements (markings).

All illuminated and indicator products are delivered with their lamps mounted.

2. RANGE

	References : Designations
Configurable	 0 695 23L: Two-way switch 0 695 27L: Double pole switch 0 695 28L: Double pole switch indicator function

3. OVERALL DIMENSIONS (mm)

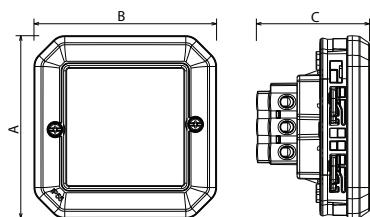

	A	B	C	D
Configurable	70.3	70.3	43.7	-

4. CONNECTION

Type of terminals: screw

Terminal capacity: 1x 6 mm²; 2x 4 mm²; 4x 2, 5 mm²

Stripping length: 10 mm

5. TECHNICAL CHARACTERISTICS

■ 5.1 Protection index

Protection against solid bodies and liquids: IP 55

Protection against impact: IK 08

■ 5.2 Material characteristics

Front plate, rocker: ABS

Membrane cover plate: PP + SEBS

Mechanism: PC

UV-resistant

Halogen-free

Resistance to salt spray: 7 days (168 h)

Self-extinguishing:

850°C/30 s for insulating components holding live parts in place.

650°C/30 s for other insulating components.

■ 5.3 Electrical characteristics


Voltage: 250 V~

Current: 16 AX

Maximum power on lamps with integrated ballast

(LED lamps and compact fluorescent): 200 W

Frequency: 50 Hz



■ 5.4 Climate characteristics

Usage temperature: - 10° à + 40° C

Storage temperature: - 25° C à + 60° C

6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Maintenance with the following products: Hexane (EN 60669-1), Methylated spirit, Soapy water, Diluted ammonia, Bleach diluted to 10%, Window-cleaning products, Pre-saturated wipes.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.
Refer to e. catalogue.