


START Downlight Flat Dimmable 226mm Round Surface

Start Downlight Flat 226 1750LM 840 DIM SM
0054129

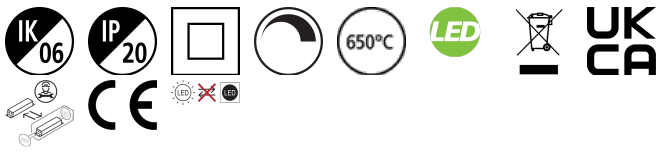

PRODUCT OVERVIEW



Product name	Start Downlight Flat 226 1750LM 840 DIM SM
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting
E-number FI	4278504
Warranty	5 years
Fixture luminous flux (lm)	1750
Luminaire efficacy (lm/W)	103
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	17
Electrical protection	Class II
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK06
Product EAN number	5410288541297

PHOTOMETRY

START Downlight Flat Dimmable 226mm Round Surface

Start Downlight Flat 226 1750LM 840 DIM SM

0054129

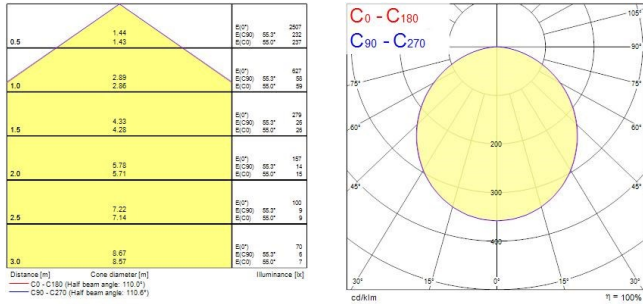

TECHNICAL DRAWINGS

