

Resisto SylSmart

Resisto 1500 IP65 4200lm 840 SSC S
0010264



Product features

- Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 4200lm; 34W; 124lm/W; 4000K; SDCM<5; CRI80; IP65; IK08 (sensor IK03); Class I; 69,000hrs (L80B20) lifespan; 1588mm x 87mm x 80mm; D-mark; SylSmart Standalone enabled, with batten mount PIR sensor.




PRODUCT OVERVIEW

| | |
|-----------------------------------|---|
| Product name | Resisto 1500 IP65 4200lm 840 SSC S |
| Technology | LED |
| Cap/Base | N/A |
| Housing | PC Polycarbonate |
| Mount | Ceiling surface mounting, Suspended, Wall surface mounted |
| General application | Logistics & Industry |
| ETIM Class | EC002892 |
| Warranty | 5 years |
| Useful luminous flux (Fuse) | 4200 |
| Fixture luminous flux (lm) | 4200 |
| Luminaire efficacy (lm/W) | 124 |
| Correlated colour temperature (k) | 4000 |
| CRI (Ra) | 80 |
| Colour Consistency (SDCM) | 5 |
| Colour Variation Initial (SDCM) | SDCM5 |
| Beam Angle (°) | 110 |
| Glare control | < 23 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 34 |
| Electrical protection | Class I |
| Control gear type | LED driver constant current |
| Dimmable | Yes |
| Dimming method | SylSmart SSC |
| Minimum dimming level (%) | 1 |
| LED Flickering Rate | Ultra low (5% or less) |
| Housing colour | Grey |
| IP rating | IP65 |
| IK rating | IK08 |
| Product EAN number | 5410288102641 |

Resisto SyISmart

Resisto 1500 IP65 4200lm 840 SSC S
0010264

PHOTOMETRY

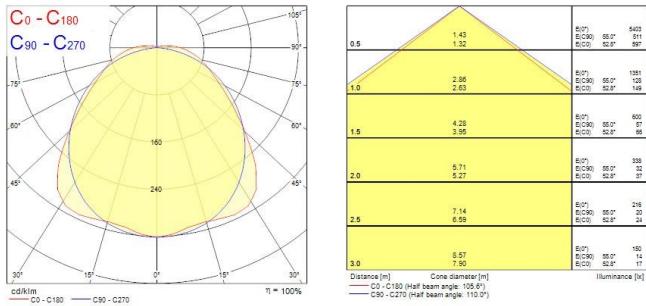

TECHNICAL DRAWINGS

