
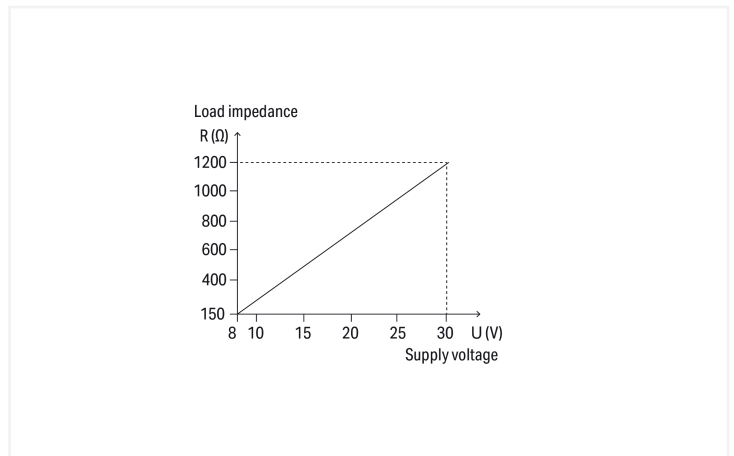




Data Sheet | Item Number: 857-815

Temperature signal conditioner for RTD sensors; Current output signal; Power via output; 6 mm module width

<https://www.wago.com/857-815>

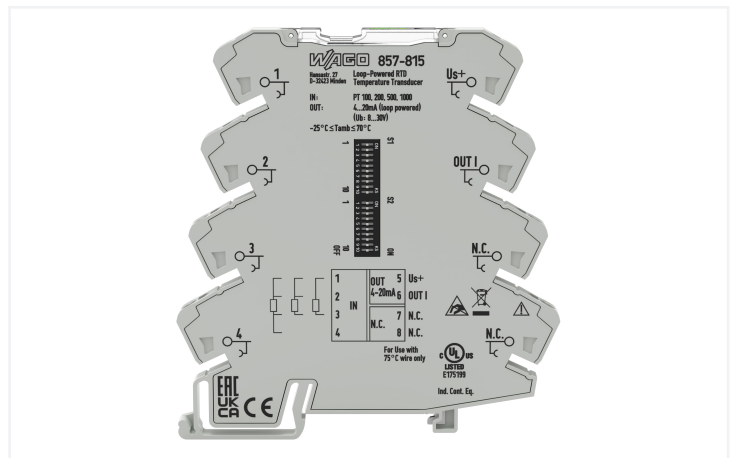

Derating

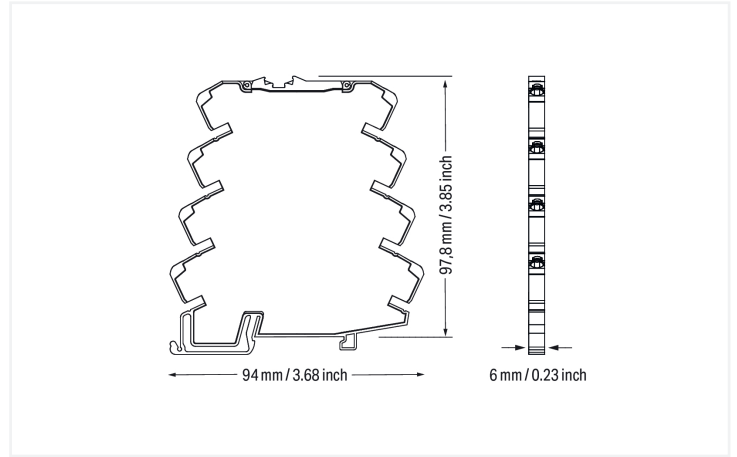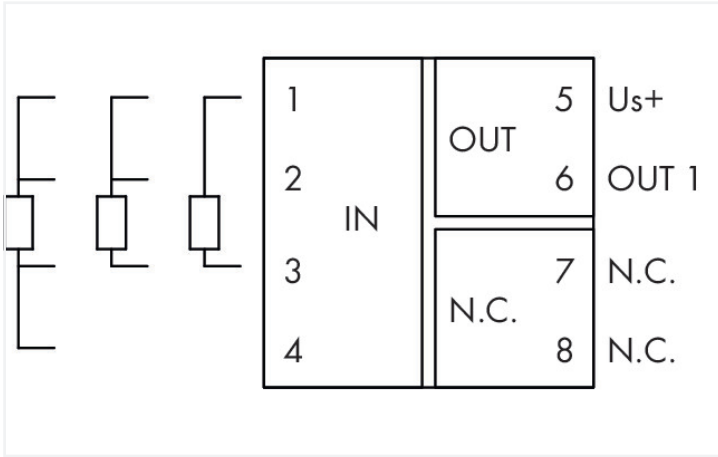

857-815
DIP Switch Adjustability

• ON **Default**

DIP Switch S1		Sensor Connection	Sensor Type	Output Signal	N.C.	Measurement Range	Measurement Range	Wire Break	Short Circuit
1	2	3	4	5	6	7	8	9	10
•	•	3-wire	Pt100	0...100	•	Lower limit of output range ± 5%	Upper limit of output range ± 2.5%	Upper limit of output range ± 5%	Upper limit of output range ± 5%
•	•	4-wire	Pt500	0...100	•	Lower limit of output range	Upper limit of output range ± 2.5%	Upper limit of output range ± 5%	Lower limit of output range
•	•	2-wire	Pt1000	0...100	•	Lower limit of output range	Upper limit of output range	Upper limit of output range ± 5%	Upper limit of output range ± 5%
•	•		1 kΩ	0...100	•	Lower limit of output range	Upper limit of output range	Upper limit of output range	Lower limit of output range
•	•		4.5 kΩ	0...100	•	Lower limit of output range	Upper limit of output range	Upper limit of output range	Lower limit of output range

*acc. to NAMUR NE 43

DIP Switch S2		Output Signal	Start Temperature	End Temperature																	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
•	•	0	50	150	•	75	167	•	210	410	•	475	887	•	500	932	•	525	997		
•	•	-175	-283	•	5	41	•	85	185	•	230	446	•	550	1022	•	575	1087	•	600	1112
•	•	-150	-238	•	10	50	•	90	194	•	240	484	•	625	1157	•	650	1202	•	675	1247
•	•	-125	-193	•	15	59	•	95	202	•	250	492	•	650	1202	•	675	1247	•	700	1292
•	•	-100	-148	•	20	68	•	100	212	•	260	500	•	675	1247	•	700	1292	•	725	1337
•	•	-80	-130	•	25	77	•	110	220	•	270	518	•	700	1292	•	725	1337	•	750	1382
•	•	-60	-112	•	30	86	•	120	248	•	280	536	•	725	1337	•	750	1382	•	775	1427
•	•	-40	-94	•	35	95	•	130	265	•	290	554	•	750	1382	•	775	1427	•	800	1472
•	•	-20	-76	•	40	104	•	140	284	•	300	572	•	800	1472	•	825	1517	•	850	1562
•	•	0	-58	•	45	113	•	150	302	•	325	617	•	825	1517	•	850	1562	•	875	1607
•	•	20	-40	•	50	122	•	160	320	•	350	662	•	850	1562	•	875	1607	•	900	1652
•	•	40	-22	•	55	131	•	170	338	•	375	707	•	875	1607	•	900	1652	•	925	1697
•	•	60	-4	•	60	140	•	180	356	•	400	752	•	900	1652	•	925	1697	•	950	1742
•	•	80	14	•	65	149	•	190	374	•	425	797	•	925	1697	•	950	1742	•	975	1787
•	•	100	32	•	70	158	•	200	392	•	450	842	•	950	1742	•	975	1787	•	1000	1832

This measurement span must have the following min. magnitude:
 • in the Celsius scale (°C): 50 K
 • in the Fahrenheit scale (°F): 90 K

Short description:

WAGO's loop-powered RTD temperature signal conditioner records sensors (Pt100, Pt200, Pt500, Pt1000) and resistors up to 4.5 kΩ, converting the temperature signal into a standard analog signal at the output.

The loop-powered RTD temperature signal conditioner provides safe isolation between input and output with 3 kV test voltage per EN 61010-1.

Features:

- No additional supply voltage required
- For Pt100, Pt200, Pt500 and Pt1000 sensors, as well as resistors up to 4.5 kΩ
- 2-, 3- and 4-wire connection technology
- Calibrated measurement range switching
- Detects a sensor wire break/short circuit

Notes

Safety Information

The signal conditioner must only be configured with the DIP switch in the de-energized state.

Note

Use shielded signal cables!

Only use shielded signal cables for analog input and output signals. This ensures the device maintains its specified accuracy and immunity to interference, even when external disturbances affect the signal cable.

Technical data	
Configuration	
Configuration options	DIP switch
Input	
Input signal type	Pt sensors Resistance

Input (RTD sensors)

Sensor types (RTD)	Pt100 Pt200 Pt500 Pt1000
Sensor connection	2-wire; 3-wire; 4-wire (switchable)
Sensor power supply (RTD) max.	≤ 0.5 mA
Temperature measurement range (RTD)	-200 ... +850 °C
Measurement span (RTD) min.	50 K

Input (resistors)

Input range (resistor)	0 ... 1 kΩ; 0 ... 4.5 kΩ
------------------------	--------------------------

Output (analog)

Output signal type	Current
Output signal (current)	4 ... 20 mA 20 ... 4 mA
Load impedance (current output)	See derating graphic

Signal Processing

Step response (typ.)	1000 ms
----------------------	---------

Measurement Error

Transmission error (typ.)	≤ 0.1 % at full measurement span
Transmission error for the set measurement range	≤ ((40 K/set measurement range [K]) + 0.1) %
Transmission error (under interference)	≤ 5 %
Temperature coefficient	≤ 0.02 %/K

Power Supply

Power supply type	Loop-powered (via output)
Supply voltage	8 ... 30 VDC (Power is derived from the output circuit.)
Power loss (max.) $P_{I(max)}$	0.7 W

Safety and protection

Rated Voltage	300 V; 150 V (UL)
Measurement category per EN/UL 61010-2-030	CAT II (input)
Protection type	IP20

Test voltage

Test voltage (input/analog output)	3 kVAC; 50 ... 60 Hz; 1 min
------------------------------------	-----------------------------

Insulation coordination (UL)

Overvoltage category	II
Pollution degree	2
Insulation type (input/analog output)	Reinforced insulation (safe isolation)

Insulation coordination

Overvoltage category	II
Pollution degree	2
Insulation type (input/analog output/supply)	Reinforced insulation (safe isolation)

Connection Data

Connection technology	Push-in CAGE CLAMP®
Solid conductor	0.08 ... 2.5 mm ² / 28 ... 14 AWG
Fine-stranded conductor	0.34 ... 2.5 mm ² / 22 ... 14 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 inches

Physical data

Width	6 mm / 0.236 inches
Height	94 mm / 3.701 inches
Depth from upper-edge of DIN-rail	97.8 mm / 3.85 inches

Mechanical data

Mounting type	DIN-35 rail
---------------	-------------

Material data

Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.013 MJ
Weight	38.9 g

Environmental requirements

Ambient temperature (operation)	-25 ... +70 °C
Ambient temperature (storage)	-40 ... +85 °C
Temperature range of connection cable	$\geq (T_{\text{ambient}} + 10 \text{ K})$
Temperature range of the connection cable (UL)	75 °C
Relative humidity	5 ... 95 % (no condensation permissible)
Operating altitude (max.)	2000 m

Standards and Specifications

Conformity marking	CE
EMC immunity to interference	EN 61000-6-2; EN 61326-1; EN 50121-3-2
EMC emission of interference	EN 61000-6-3; EN 61326-1; EN 50121-3-2
Standards/specifications	EN 61010-1 EN 61373

Commercial data

PU (SPU)	1 pcs
Packaging type	Bag
Country of origin	DE
GTIN	4055143475648
Customs tariff number	85437090300

Product Classification

UNSPSC	41111970
eCl@ss 10.0	27-21-01-29
eCl@ss 9.0	27-21-01-29
ETIM 9.0	EC002919
ETIM 10.0	EC002919
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
SCIP notification number (Austria)	830a7e26-28ea-4705-ab6e-226f9c633520
SCIP notification number (Belgium)	63788937-7a1f-4563-936a-f01960202294
SCIP notification number (Bulgaria)	7573483d-d923-4363-9064-ce0784b75504
SCIP notification number (Czech Republic)	17fd5aa-0c9d-4035-8fac-fb4e34ddac7f
SCIP notification number (Denmark)	f6a88738-2c30-4e26-8f7e-78d92a8961e5
SCIP notification number (Finland)	b4ce184e-8252-4b06-b805-6aa2c771805f
SCIP notification number (France)	7d65f4e8-4b0d-4e4d-922c-5b4b37ec9f15
SCIP notification number (Germany)	7eda7375-97a9-4708-8499-ee382843832f
SCIP notification number (Hungary)	eef5d1bb-60c8-4a7b-815f-42f57a0b5106
SCIP notification number (Italy)	9d811551-d172-4095-9c09-acc10881822b
SCIP notification number (Netherlands)	5b4bce60-08c5-43bc-b361-c0de92c2e4da

Environmental Product Compliance

SCIP notification number (Poland)	05d900c2-b348-49b3-9862-d1595b7b0a8f
SCIP notification number (Romania)	5914960a-62a8-45a9-95fc-a9ee80aab951
SCIP notification number (Sweden)	d4592a7f-9ffa-4c4d-9de5-be795739849b

Approvals / Certificates

General approvals **Declarations of conformity and manufacturer's declarations**



Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 004/2011	EAC CoC 03078
EAC GZO Almaty Standart	TP TC 020/2011	EAC CoC 03081
UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	UL 61010-2-201	E175199

Approval	Standard	Certificate Name
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-
UK-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 857-815	↓
--	-------------------

Documentation

Manual

WAGO Temperature Signal Conditioners	↓
--------------------------------------	-------------------

Bid Text

857-815	19.02.2019	xml 5.60 KB	↓
857-815	20.02.2019	docx 17.98 KB	↓

Instruction Leaflet

Temperature signal conditioner for RTD sensors; Current output signal; Power via output	V 2.0.0 29.09.2020	pdf 2278.39 KB	↓
---	-----------------------	-------------------	-------------------

CAD/CAE-Data

CAD data	CAE data
2D/3D Models 857-815	EPLAN Data Portal 857-815
	WSCAD Universe 857-815
	ZUKEN Portal 857-815

1 Compatible Products

1.1 Optional Accessories

1.1.1 Installation

1.1.1.1 Mounting accessories



Item No.: 249-117
Screwless end stop; 10 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

Item No.: 249-197
Screwless end stop; 14 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

Item No.: 249-116
Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

1.1.2 Interface module

1.1.2.1 Interface adapters



Item No.: 857-980
Interface adapter; 16-pole; analog

1.1.3 Jumper

1.1.3.1 Jumper



Item No.: 281-482
Jumper; 2-way; insulated; gray



Item No.: 859-410/000-006
Jumper; for jumper slot; 10-way; insulated; blue



Item No.: 859-410
Jumper; for jumper slot; 10-way; insulated; light gray



Item No.: 859-410/000-005
Jumper; for jumper slot; 10-way; insulated; red



Item No.: 859-410/000-029
Jumper; for jumper slot; 10-way; insulated; yellow



Item No.: 859-402/000-006
Jumper; for jumper slot; 2-way; insulated; blue



Item No.: 859-402
Jumper; for jumper slot; 2-way; insulated; light gray



Item No.: 859-402/000-005
Jumper; for jumper slot; 2-way; insulated; red



Item No.: 859-402/000-029
Jumper; for jumper slot; 2-way; insulated; yellow



Item No.: 859-403/000-006
Jumper; for jumper slot; 3-way; insulated; blue



Item No.: 859-403
Jumper; for jumper slot; 3-way; insulated; light gray



Item No.: 859-403/000-005
Jumper; for jumper slot; 3-way; insulated; red



Item No.: 859-403/000-029
Jumper; for jumper slot; 3-way; insulated; yellow



Item No.: 859-404/000-006
Jumper; for jumper slot; 4-way; insulated; blue



Item No.: 859-404
Jumper; for jumper slot; 4-way; insulated; light gray



Item No.: 859-404/000-005
Jumper; for jumper slot; 4-way; insulated; red

1.1.3.1 Jumper



Item No.: 859-404/000-029
 Jumper; for jumper slot; 4-way; insulated; yellow



Item No.: 859-405/000-006
 Jumper; for jumper slot; 5-way; insulated; blue



Item No.: 859-405
 Jumper; for jumper slot; 5-way; insulated; light gray



Item No.: 859-405/000-005
 Jumper; for jumper slot; 5-way; insulated; red



Item No.: 859-405/000-029
 Jumper; for jumper slot; 5-way; insulated; yellow



Item No.: 859-406/000-006
 Jumper; for jumper slot; 6-way; insulated; blue



Item No.: 859-406
 Jumper; for jumper slot; 6-way; insulated; light gray



Item No.: 859-406/000-005
 Jumper; for jumper slot; 6-way; insulated; red



Item No.: 859-406/000-029
 Jumper; for jumper slot; 6-way; insulated; yellow



Item No.: 859-407/000-006
 Jumper; for jumper slot; 7-way; insulated; blue



Item No.: 859-407
 Jumper; for jumper slot; 7-way; insulated; light gray



Item No.: 859-407/000-005
 Jumper; for jumper slot; 7-way; insulated; red



Item No.: 859-407/000-029
 Jumper; for jumper slot; 7-way; insulated; yellow



Item No.: 859-408/000-006
 Jumper; for jumper slot; 8-way; insulated; blue



Item No.: 859-408
 Jumper; for jumper slot; 8-way; insulated; light gray



Item No.: 859-408/000-005
 Jumper; for jumper slot; 8-way; insulated; red



Item No.: 859-408/000-029
 Jumper; for jumper slot; 8-way; insulated; yellow



Item No.: 859-409/000-006
 Jumper; for jumper slot; 9-way; insulated; blue



Item No.: 859-409
 Jumper; for jumper slot; 9-way; insulated; light gray



Item No.: 859-409/000-005
 Jumper; for jumper slot; 9-way; insulated; red



Item No.: 859-409/000-029
 Jumper; for jumper slot; 9-way; insulated; yellow

1.1.4 Marking

1.1.4.1 Marker



Item No.: 793-5501
 WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white



Item No.: 793-502
 WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 793-566
 WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 793-503
 WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 793-504
 WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 793-505
 WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 793-506
 WMB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 793-501
 WMB marking card; as card; not stretchable; plain; snap-on type; white



Item No.: 2009-115
 WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

1.1.4.2 Marking strip



Item No.: 2009-110

Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

1.1.5 Power supply

1.1.5.1 Power Supply



Item No.: 787-2852

Switched-mode power supply; 1-phase; 24 VDC output voltage; 1 A output current

1.1.6 Terminal blocks

1.1.6.1 Supply module



Item No.: 857-979

Supply and through module

1.1.6.2 Through terminal block



Item No.: 857-979

Supply and through module

1.1.7 Tool

1.1.7.1 Operating tool




Item No.: 210-720

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured


Installation Notes

Configuring



Configuration via DIP switch

Commoning



Commoning, not discrete wiring – Same outline allows use of a single in-line, push-in jumper.