

ZEPHYR SML LANT 3700LM 4K 1M CLI GREY
0049390



Features

- LED Lantern complete with 48mm side entry spigot and supplied with 8 metres mains supply (H05RN-F) cable, die-cast aluminium housing, polycarbonate cover / lens, IP66, IK09, Class I, 4000K (Neutral White), Non-dimmable, 3700lm, 30W, 123lm/W, CRI70+, Type 1M distribution, 50,000hrs, (LxWxD) 359 x 161 x 78mm


Product Overview

Product name	ZEPHYR SML LANT 3700LM 4K 1M CLI GREY
Technology	LED
Housing	Aluminium
Mount	Side entry
General application	Education, Hospitality, Logistics & Industry, Office, Retail
ETIM Class	EC000062
E-number FI	4579413
Fixture luminous flux (lm)	3700
Luminaire efficacy (lm/W)	123
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	70
Colour Variation Initial (SDCM)	7
Photobiological Risk Group	RG1
Total power consumption (W)	30
Electrical protection	Class I
Control gear type	LED driver constant current
Housing colour	RAL9022
IP rating	IP66

ZEPHYR SML LANT 3700LM 4K 1M CLI GREY
0049390

IK rating	IK09
Product EAN number	5410288493909
Warranty	5 years
Useful luminous flux (#use)	3700

Photometry

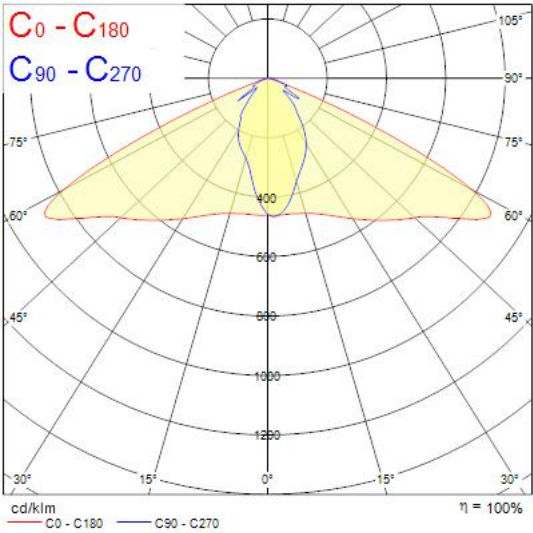

Technical drawings

