

Description

This high bay is designed with large size but light weight, dia.320mm heat sink helps the body better heat dessipation, and makes sure lifespan. Multiple beam angles adjustable for different installation height. The fixture is suitable for both wholesales and contract channel.

Key Features

- Equiv. to 300W Metal Halide lamps
- Superior temperature stability
- Adjustable light distributions for different project needs

Applications


- Warehouse
- Industrial Facility
- Exhibition Center
- Shopping Mall
- Gymnasium
- Airport
- Toll Station and so on.

UFO 950-120


Specifications

Model No.		950-120	
Power Consumption		Adjustabe 80W / 100W / 120W / 150W ±5%	
LED Type		SMD	
Luminous Flux (±5%)		Max 21000lm	
Efficacy (5000K, Ra70)		140 LM/W	
Correlated Color		5000K	
Color Rendering Index		Ra70	
Beam Angle		Adjustable 60° / 80° / 100°	
Power Supply		LED Driver	
Input Voltage		100-277 VAC	
Power Factor		≥0.92	
Frequency		50 / 60 Hz	
Surge Protection		L-N: 4KV; L/N-GND: 4KV	
Driver Type		Constant Current (CC)	
Product Dimension (mm)		φ320×174	
Luminaire Net Weight		3±0.3kg	3.2±0.3kg
Carton Size		377x377x230mm	
Gross Weight		4.7±0.3kg	5.0±0.3kg
Material	Housing	Aluminum Alloy	
	Optics	Polycarbonate Optical Lens	
Finish		Powder Coating	
Fixture Color		Black	
IP Rating		IP42	
Mounting Option		Loop Hanging	
Operating Temperature		-30°C to + 50°C	
Life Time		>50,000Hrs (Ta=30°C@L70)	
Warranty		3 Years	
Dimmable		Non-dimmable	


Photometry

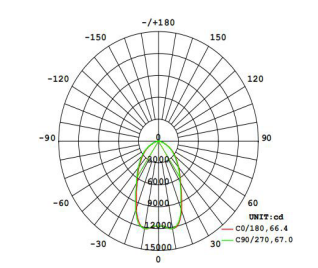

Lens adjust to 60deg

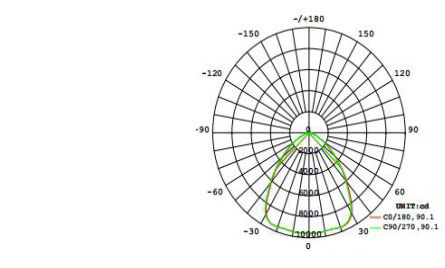

Lens adjust to 80deg

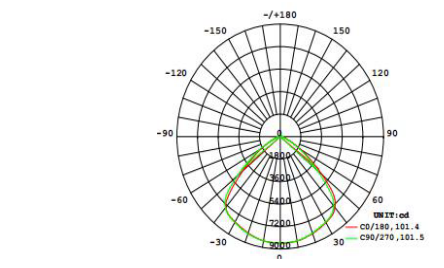

Lens adjust to 100deg

Mounting Options

Loop Hanging



Dimensions

