


Walraven Bifix® G2 with Lining (M10) (BUP1000)

(A0572)

for steel, copper, cast iron and plastic (multilayer) pipe

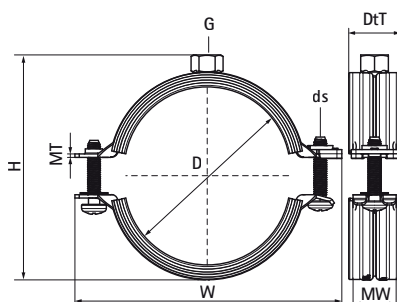

Features & benefits

- two-screw clamp
- quick closing mechanism for easy locking of the clamp with one hand
- 2 component rubber lining provides easy positioning of the pipe during installation
- when the clamp is closed, the pipe rests on soft black rubber lining for increased noise reduction
- material: steel
- product is part of the Walraven BIS UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- temperature resistance from -30 °C to +120 °C
- sound insulating lining according DIN 4109
- noise reduction according to ISO 3822-1 up to 23 dB(A)



EPD

Product Number	Outside Pipe Diameter	DN	Pipe Diameter Imperial	Connection Thread	Total Width x Total Height x Total Depth	Material Width x Material Thickness	Screw Size	Approvals	Maximum Allowed Load Faz
Reference letter	D	D	D	G	W x H x DtT	MW x MT	ds		F _{0,z}
Unit description	mm		"		mm x mm x mm	mm x mm			N
31285014	10 - 14	DN 8	1/4	M10	59 x 34 x 24	20 x 1.25	M6	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	800
31285019	15 - 19	DN 10	3/8	M10	63 x 38 x 24	20 x 1.25	M6	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	800
31285023	20 - 23	DN 15	1/2	M10	68 x 43 x 24	20 x 1.25	M6	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	800
31285028	25 - 28	DN 20	3/4	M10	74 x 49 x 24	20 x 1.25	M6	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	800
31285035	31 - 35	DN 25	1	M10	80 x 59 x 24	20 x 1.25	M6	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	800
31285039	36 - 39	-	-	M10	84 x 63 x 24	20 x 1.25	M6	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	800
31285045	40 - 45	DN 32	1 1/4	M10	91 x 68 x 24	20 x 1.25	M6	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	800
31285052	48 - 52	DN 40	1 1/2	M10	97 x 75 x 24	20 x 1.25	M6	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	800
31285058	54 - 58	-	-	M10	104 x 85 x 24	20 x 1.25	M6	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	800
31285064	60 - 64	DN 50	2	M10	109 x 93 x 24	20 x 1.25	M6	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	800
31285070	66 - 70	-	-	M10	118 x 101 x 24	20 x 1.50	M6	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	1,000
31285079	75 - 79	DN 65	2 1/2	M10	125 x 107 x 24	20 x 1.50	M6	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	1,000
31285083	80 - 83	-	-	M10	132 x 114 x 24	20 x 1.50	M6	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	1,000
31285091	88 - 91	DN 80	3	M10	142 x 124 x 27	23 x 2.00	M6	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	1,800
31285097	92 - 97	-	-	M10	148 x 128 x 27	23 x 2.00	M6	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	1,800
31285105	100 - 105	-	-	M10	155 x 135 x 27	23 x 2.00	M6	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	1,800
31285115	108 - 115	DN 100	4	M10	164 x 147 x 27	23 x 2.00	M6	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	1,800
31285130	125 - 130	-	-	M10	181 x 164 x 27	23 x 2.00	M6	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	1,800
31285140	133 - 140	DN 125	5	M10	189 x 172 x 27	23 x 2.00	M6	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	1,800
31285160	152 - 160	-	-	M10	209 x 190 x 27	23 x 2.00	M6	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	1,800
31285169	165 - 169	DN 150	6	M10	225 x 203 x 29	25 x 2.50	M8	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	2,500
31285180	176 - 180	-	-	M10	238 x 215 x 29	25 x 2.50	M8	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	2,500
31285200	192 - 200	-	-	M10	257 x 233 x 29	25 x 2.50	M8	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	2,500
31285210	205 - 210	-	-	M10	269 x 247 x 29	25 x 2.50	M8	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	2,500
31285225	219 - 225	DN 200	8	M10	283 x 260 x 29	25 x 2.50	M8	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	2,500