


Walraven Bifix® G2 with Lining (M8) (BUP1000)

(A0544)

for steel, copper, cast iron and plastic (multilayer) pipe

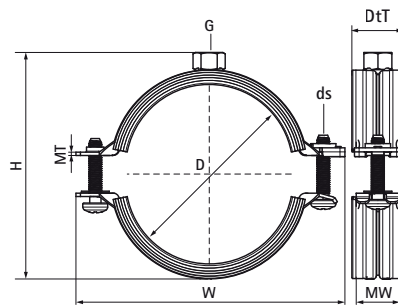

Features & benefits

- two-screw clamp
- quick closing mechanism for easy locking of the clamp with one hand
- 2 component rubber lining provides easy positioning of the pipe during installation
- when the clamp is closed, the pipe rests on soft black rubber lining for increased noise reduction
- suitable for steel, copper, cast iron and plastic (multilayer) pipe
- material: steel
- product is part of the Walraven BIS UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- temperature resistance from -30 °C to +120 °C
- sound insulating lining according DIN 4109
- noise reduction according to ISO 3822-1 up to 23 dB(A)



EPD

Product Number	Outside Pipe Diameter	DN	Pipe Diameter Imperial	Connection Thread	Total Width x Total Height x Total Depth	Material Width x Material Thickness	Screw Size	Approvals	Maximum Allowed Load Faz
Reference letter	D	D	D	G	W x H x DdT	MW x MT	ds		F _{0,z}
Unit description	mm		"		mm x mm x mm	mm x mm			N
31185014	10 - 14	DN 8	1/4	M8	59 x 33 x 24	20 x 1.25	M6	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	700
31185019	15 - 19	DN 10	3/8	M8	63 x 38 x 24	20 x 1.25	M6	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	700
31185023	20 - 23	DN 15	1/2	M8	68 x 43 x 24	20 x 1.25	M6	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	700
31185028	25 - 28	DN 20	3/4	M8	74 x 49 x 24	20 x 1.25	M6	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	700
31185035	31 - 35	DN 25	1	M8	80 x 59 x 24	20 x 1.25	M6	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	700
31185039	36 - 39	-	-	M8	84 x 63 x 24	20 x 1.25	M6	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	700
31185045	40 - 45	DN 32	1 1/4	M8	91 x 68 x 24	20 x 1.25	M6	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	700
31185052	48 - 52	DN 40	1 1/2	M8	97 x 75 x 24	20 x 1.25	M6	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	700
31185058	54 - 58	-	-	M8	104 x 85 x 24	20 x 1.25	M6	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	700
31185064	60 - 64	DN 50	2	M8	109 x 93 x 24	20 x 1.25	M6	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	700
31185070	66 - 70	-	-	M8	118 x 99 x 24	20 x 1.50	M6	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	800
31185079	75 - 76	DN 65	2 1/2	M8	125 x 105 x 24	20 x 1.50	M6	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	800
31185083	80 - 83	-	-	M8	132 x 112 x 24	20 x 1.50	M6	RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	800