

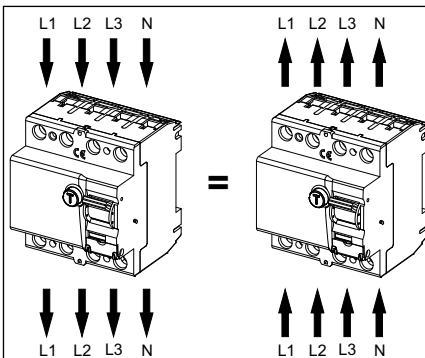
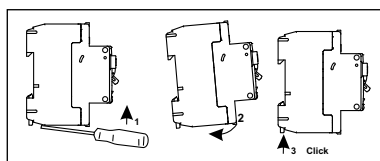


FRC_mM-NA

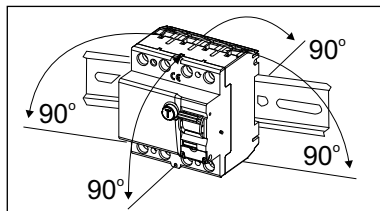






Maximum back-up fuse/Max. zulässige Vorsicherung
I_n = 25-63A 63 A gG/gL

1. 2. 3. 4. 5. 6. N. N:



Extension UL1053 RCD:


Supplementary Protector Technical Data	USA/Canada UL 1053
3 phase (series-fuse 63 A): 5 kA - 480Y/277V ~ 60 Hz (fault current)	at 30°C Cu 75°C, min. AWG 14, max. AWG 6, Nm 4

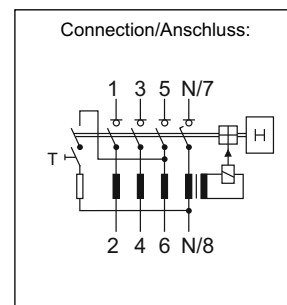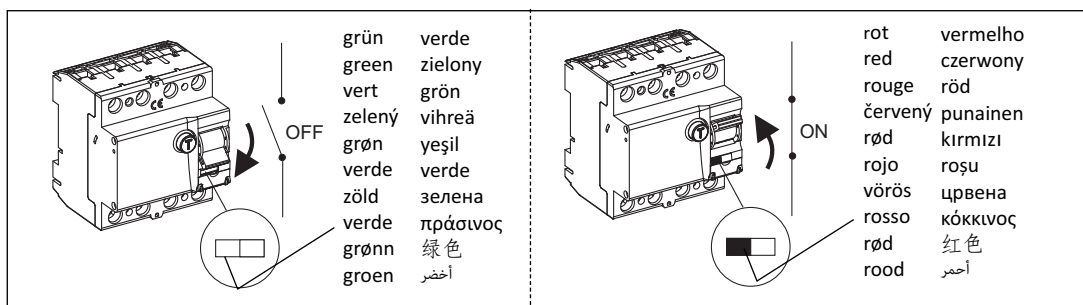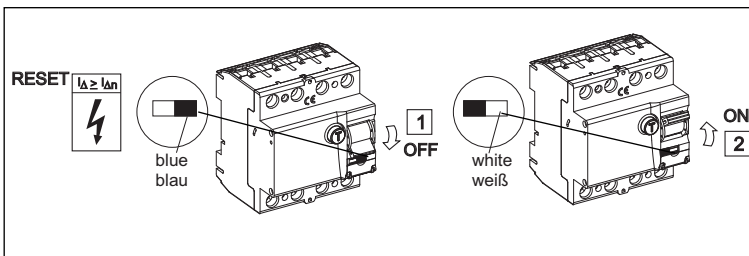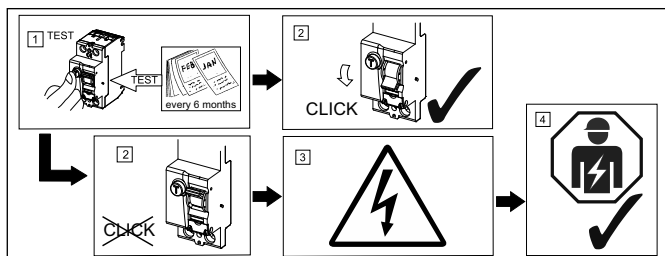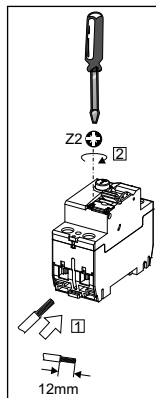


FRCmM-NA

4-pole acc. to IEC61008

30mA Types / Typen:

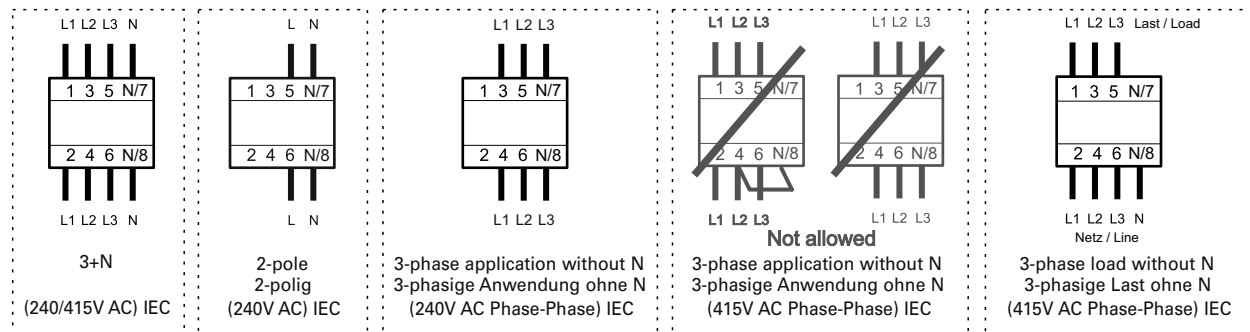


300mA Types / Typen:

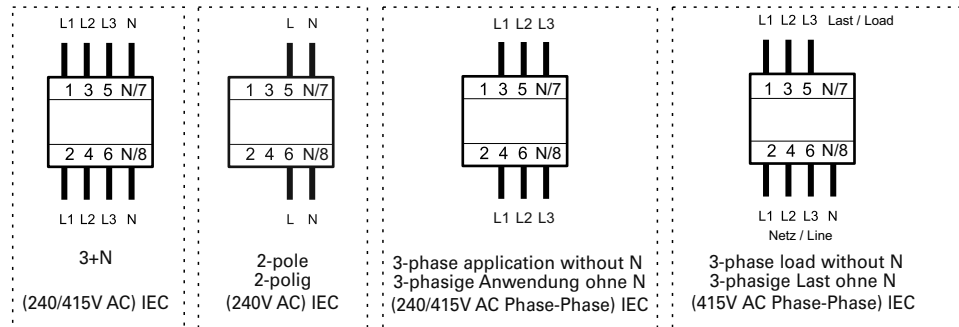

4-pole acc. to UL1053

30, 300mA Types / Typen:

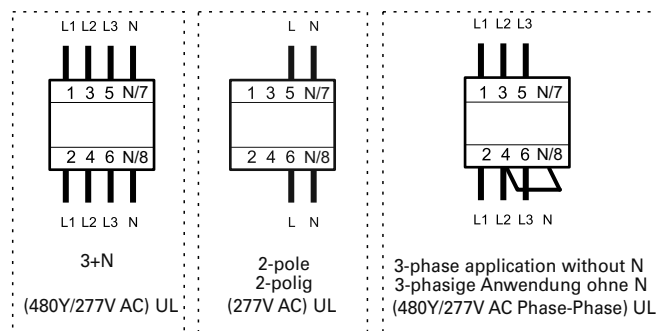

FRCmM-NA-110

30, 300mA Types / Typen:

