


Walraven Bifix® G2 with Lining (M8/10) (BUP1000)

(A0552)

for steel, copper, cast iron and plastic (multilayer) pipe

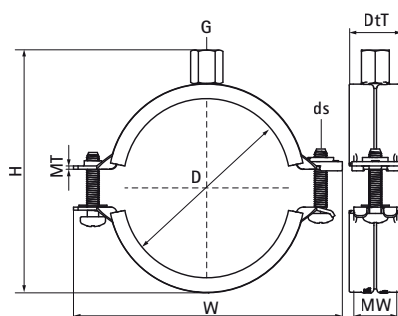

Features & benefits

- two-screw clamp
- quick closing mechanism for easy locking of the clamp with one hand
- 2 component rubber lining provides easy positioning of the pipe during installation
- when the clamp is closed, the pipe rests on soft black rubber lining for increased noise reduction
- material: steel
- product is part of the Walraven BIS UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- temperature resistance from -30 °C to +120 °C
- sound insulating lining according DIN 4109
- noise reduction according to ISO 3822-1 up to 23 dB(A)



EPD

Product Number	Outside Pipe Diameter	DN	Pipe Diameter Imperial	Connection Thread	Total Width x Total Height x Total Depth	Material Width x Material Thickness	Screw Size	Approvals	Maximum Allowed Load Faz
Reference letter	D	D	D	G	W x H x DtT	MW x MT	ds		F _{0,z}
Unit description	mm		"		mm x mm x mm	mm x mm			N
31085014	10 - 14	DN 8	1/4	M8/M10	59 x 43 x 24	20 x 1.25	M6	CE ETA RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	700
31085019	15 - 19	DN 10	3/8	M8/M10	63 x 46 x 24	20 x 1.25	M6	CE ETA RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	700
31085023	20 - 23	DN 15	1/2	M8/M10	68 x 50 x 24	20 x 1.25	M6	CE ETA RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	700
31085028	25 - 28	DN 20	3/4	M8/M10	74 x 56 x 24	20 x 1.25	M6	CE ETA RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	700
31085035	31 - 35	DN 25	1	M8/M10	80 x 62 x 24	20 x 1.25	M6	CE ETA RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	700
31085039	36 - 39	-	-	M8/M10	84 x 66 x 24	20 x 1.25	M6	CE ETA RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	700
31085045	40 - 45	DN 32	1 1/4	M8/M10	91 x 73 x 24	20 x 1.25	M6	CE ETA RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	700
31085052	48 - 52	DN 40	1 1/2	M8/M10	97 x 79 x 24	20 x 1.25	M6	CE ETA RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	700
31085058	54 - 58	-	-	M8/M10	104 x 86 x 24	20 x 1.25	M6	CE ETA RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	700
31085064	60 - 64	DN 50	2	M8/M10	109 x 91 x 24	20 x 1.25	M6	CE ETA RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	700
31085070	66 - 70	-	-	M8/M10	118 x 100 x 25	20 x 1.50	M6	CE ETA RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	800
31085079	75 - 79	DN 65	2 1/2	M8/M10	125 x 107 x 25	20 x 1.50	M6	CE ETA RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	800
31085083	80 - 83	-	-	M8/M10	132 x 114 x 25	20 x 1.50	M6	CE ETA RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	800
31085091	88 - 91	DN 80	3	M8/M10	142 x 123 x 29	23 x 2.00	M6	CE ETA RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	1,700
31085097	92 - 97	-	-	M8/M10	147 x 132 x 29	23 x 2.00	M6	CE ETA RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	1,700
31085105	100 - 105	-	-	M8/M10	155 x 137 x 29	23 x 2.00	M6	CE ETA RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	1,700
31085115	108 - 115	DN 100	4	M8/M10	164 x 145 x 29	23 x 2.00	M6	CE ETA RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	1,700
31085130	125 - 130	-	-	M8/M10	181 x 162 x 29	23 x 2.00	M6	CE ETA RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	1,700
31085140	133 - 140	DN 125	5	M8/M10	189 x 171 x 29	23 x 2.00	M6	CE ETA RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	1,700
31085160	152 - 160	-	-	M8/M10	209 x 187 x 29	23 x 2.00	M6	CE ETA RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	1,700

Walraven Bifix® G2 with Lining (M8/10) (BUP1000)

(A0552)

for steel, copper, cast iron and plastic (multilayer) pipe

Product Number	Outside Pipe Diameter	DN	Pipe Diameter Imperial	Connection Thread	Total Width x Total Height x Total Depth	Material Width x Material Thickness	Screw Size	Approvals	Maximum Allowed Load Faz
Reference letter	D	D	D	G	W x H x DtT	MW x MT	ds		F _{0,z}
Unit description	mm		"		mm x mm x mm	mm x mm			N
31085169	165 - 169	DN 150	6	M8/M10	225 x 203 x 31	25 x 2.50	M8	CE ETA RAL-GZ 655/B ITB (KOT) ISO 3822-1 EPD	2,000
31085180	176 - 180	-	-	M8/M10	238 x 209 x 31	25 x 2.50	M8	CE ETA ITB (KOT) ISO 3822-1 EPD	2,500
31085200	192 - 200	-	-	M8/M10	257 x 238 x 31	25 x 2.50	M8	CE ETA ITB (KOT) ISO 3822-1 EPD	2,500
31085210	205 - 210	-	-	M8/M10	269 x 249 x 31	25 x 2.50	M8	CE ETA ITB (KOT) ISO 3822-1 EPD	2,500
31085225	219 - 225	DN 200	8	M8/M10	283 x 265 x 31	25 x 2.50	M8	CE ETA ITB (KOT) ISO 3822-1 EPD	2,500