


## Walraven BISMAT® 2000 (M8/10) 2-screw

(A0524)

for steel, copper, cast iron and plastic (multilayer) pipe

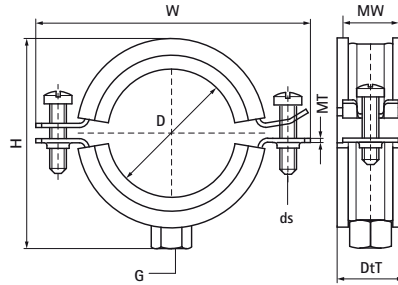

### Features & benefits

- two-screw clamp
- with Walraven BISMAT® quick locking system
- material: steel
- zinc plated
- sound insulating lining according DIN 4109
- noise reduction according to ISO 3822-1 up to 23 dB(A)
- tested for fire safety



| Product Number   | Outside Pipe Diameter | DN     | Pipe Diameter Imperial | Connection Thread | Total Width x Total Height x Total Depth | Material Width x Material Thickness | Screw Size | Approvals                                                           | Maximum Allowed Load Faz |
|------------------|-----------------------|--------|------------------------|-------------------|------------------------------------------|-------------------------------------|------------|---------------------------------------------------------------------|--------------------------|
| Reference letter | D                     | D      | D                      | G                 | W x H x DtT                              | MW x MT                             | ds         |                                                                     | F <sub>0,z</sub>         |
| Unit description | mm                    |        | "                      |                   | mm x mm x mm                             | mm x mm                             |            |                                                                     | N                        |
| 3403064          | 57 - 64               | DN 50  | 2                      | M8/M10            | 107 x 90 x 23                            | 23 x 2.00                           | M6         | RAL-GZ 656   ITB (KOT)   CE   ETA   ISO 3822-1   RAL-GZ 655/B   EPD | 520                      |
| 3403070          | 64 - 70               | -      | -                      | M8/M10            | 115 x 56 x 23                            | 23 x 2.00                           | M6         | RAL-GZ 656   ITB (KOT)   CE   ETA   ISO 3822-1   RAL-GZ 655/B   EPD | 520                      |
| 3403080          | 73 - 80               | DN 65  | 2½                     | M8/M10            | 125 x 108 x 23                           | 23 x 2.00                           | M6         | RAL-GZ 656   ITB (KOT)   CE   ETA   ISO 3822-1   RAL-GZ 655/B   EPD | 520                      |
| 3403091          | 83 - 91               | DN 80  | 3                      | M8/M10            | 136 x 120 x 25                           | 25 x 2.50                           | M6         | RAL-GZ 656   ITB (KOT)   CE   ETA   ISO 3822-1   RAL-GZ 655/B   EPD | 935                      |
| 3403105          | 100 - 105             | -      | -                      | M8/M10            | 152 x 136 x 25                           | 25 x 2.50                           | M6         | RAL-GZ 656   ITB (KOT)   CE   ETA   ISO 3822-1   RAL-GZ 655/B   EPD | 935                      |
| 3403114          | 114                   | DN 100 | 4                      | M8/M10            | 159 x 143 x 25                           | 25 x 2.50                           | M6         | RAL-GZ 656   ITB (KOT)   CE   ETA   ISO 3822-1   RAL-GZ 655/B   EPD | 935                      |
| 3403119          | 116 - 119             | -      | -                      | M8/M10            | 164 x 150 x 25                           | 25 x 2.50                           | M6         | ITB (KOT)   CE   ETA   ISO 3822-1   RAL-GZ 655/B   EPD              | 935                      |
| 3403125          | 122 - 125             | -      | -                      | M8/M10            | 172 x 159 x 25                           | 25 x 2.50                           | M6         | ITB (KOT)   CE   ETA   ISO 3822-1   RAL-GZ 655/B   EPD              | 935                      |
| 3403141          | 133 - 141             | DN 125 | 5                      | M8/M10            | 187 x 180 x 25                           | 25 x 2.50                           | M6         | ITB (KOT)   CE   ETA   ISO 3822-1   RAL-GZ 655/B   EPD              | 935                      |