



Henco **Flex**




HENCO FLEX

Why use Henco Flex?

Henco Flex is the pre-insulated solution to connect your heat pump, ensuring the safe and simple supply of water into your house. The two Henco standard multilayer pipes integrated centrally in the insulation allow the installer to choose the connection himself: Henco Press, Henco Brass Press or Henco Compression Fittings. The closed-cell structure of the PE foam which is extruded simultaneously with the outer jacket ensures an optimal insulation.

Unique advantages

- ✓ Sturdy and extremely flexible
- ✓ No moisture segmentation in case of a damaged outer jacket
- ✓ Excellent insulation values thanks to the PE foam's closed-cell structure (0,028 - 0,038 W/m*K)
- ✓ Minimum heat loss thanks to the homogeneous insulating material
- ✓ Various application possibilities: heat pumps, sanitary, heating/cooling...
- ✓ UV-resistant
- ✓ Easy to handle, lightweight material

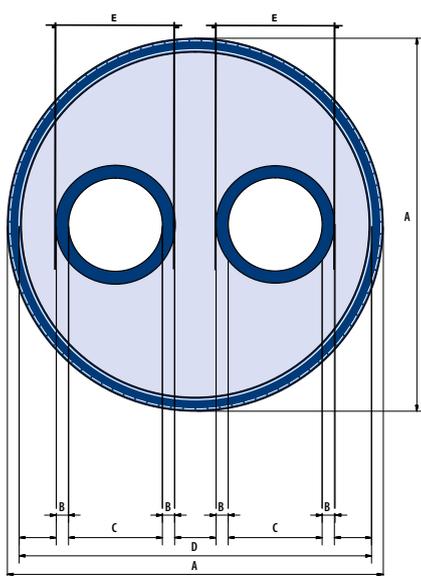

	1-FLEX32	HFMAN125
A (mm)	125	125
B (mm)	3	/
C, (mm)	26	/
D (mm)	108	/
E (mm)	32	/
PER COIL (m)	1	/

**Always cut to size in multiples of 1 m,
with a maximum length of 15m.**

Accessories

The rubber end caps create a watertight connection between the Henco multilayer pipe and the insulated jacket.



Flex 32



HFMAN125 - Rubber end cap

WE CARE TO CONNECT