



GIOTTO 235 4000K SURFACE DALI

Item No: 3034760

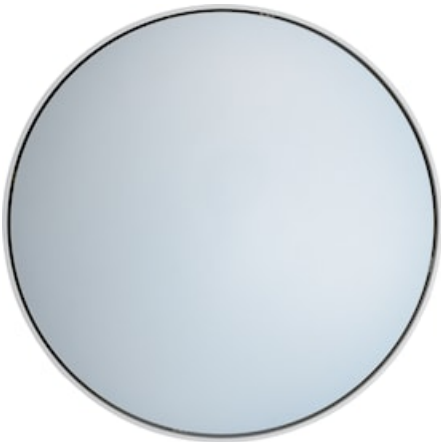

PRO

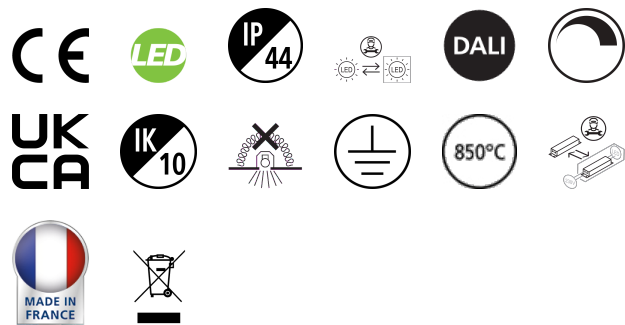


Ambient and decorative round, surface mounted LED bulkhead luminaire. White robust polycarbonate body with opal diffuser, 1150lm, 10.1W, 114lm/W, 4000K, CRI 80, DALI, 120,000 hours lumen maintenance (L70:B50). Drive current: 275mA, IP44, IK10, Class I, 220-240V.

Technical Assets


Dimensions (mm)

Giotto 235 surface mounted

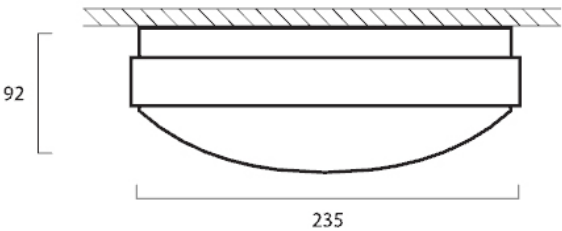

Photometrics

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Beam area [m²]	Beam volume [m³]	Beam length [m]	Beam width [m]	Beam height [m]	Beam depth [m]
0.5	1.61	115.2°	1.61	2.05	1.61	1.61	1.61	1.61	1.61
1.0	3.21	115.2°	3.21	8.12	6.45	3.21	3.21	3.21	3.21
1.5	4.82	115.2°	4.82	18.31	14.47	4.82	4.82	4.82	4.82
2.0	6.43	115.2°	6.43	32.62	25.94	6.43	6.43	6.43	6.43
2.5	8.03	115.2°	8.03	50.93	40.91	8.03	8.03	8.03	8.03
3.0	9.64	115.2°	9.64	73.24	58.28	9.64	9.64	9.64	9.64



GIOTTO 235 4000K SURFACE DALI

Item No: 3034760



General data

Product name	GIOTTO 235 4000K SURFACE DALI
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
Environment	Indoor
General application	Hospitality, Logistics & Industry
Operating temperature range (°C)	-25°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4270117
Warranty	5 years

Optical data

Useful luminous flux (Φuse)	1150
Fixture luminous flux (lm)	1150
Luminous flux (lm)	1150
Luminaire efficacy (lm/W)	114
Correlated colour temperature (k)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Beam Angle (°)	120
Distribution type	Symmetric
Glare control	< 25
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	80

Electrical data

Total power consumption (W)	10.1
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Control gear mounting	Integrated
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
Drive current (mA)	275
Inrush Current (A)	20
Inrush Duration (µs)	200
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	30
Max. products per 16A C Breaker	45
Max. products per 20A C Breaker	54
Max. products per 10A B Breaker	20
Max. products per 16A B Breaker	30
Max. products per 20A B Breaker	36
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	2.5

Lifetime data

Lifespan L70 B10	120000
Lifespan L80 B50	120000
Lifespan L90 B50	73500

GIOTTO 235 4000K SURFACE DALI

Item No: 3034760



Physical data

Housing colour	White
IP rating	IP44
IK rating	IK10
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Height (mm)	92
Nominal Product Diameter (mm)	235
Weight (kg)	0.86

Packaging

Product EAN number	8711971347606
Packaging single length / height (cm)	26.5
Packaging single width (cm)	26.5
Packaging single depth (cm)	9.5
DUN14 (inner)	08711971347606
Units per outer package	1
Packaging outer length / height (cm)	26.5
Packaging outer width (cm)	26.5
Packaging outer depth (cm)	9.5

Safety data

Glow Wire Test (°C)	850
Optimal operating condition (°C)	-25-25