

Data Sheet | Item Number: 713-1426/117-000




THR male header, 2-row; 0.8 x 0.8 mm solder pin; angled; 100% protected against mismatching; Threaded flange; Pin spacing 3.5 mm; 12-pole; black

<https://www.wago.com/713-1426/117-000>



Color: ■ black

Similar to illustration

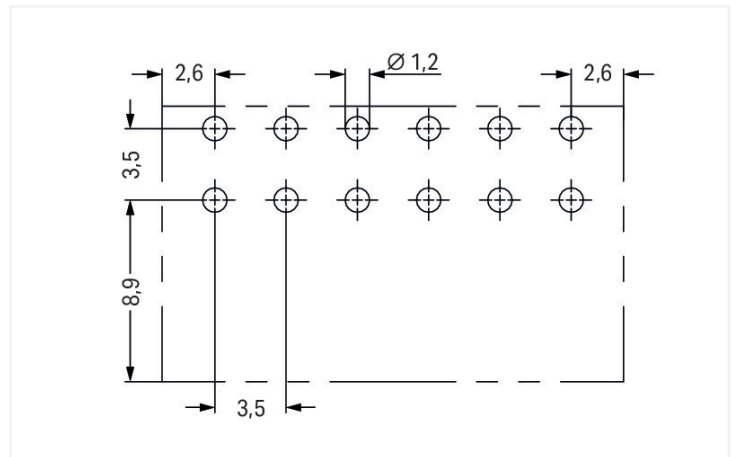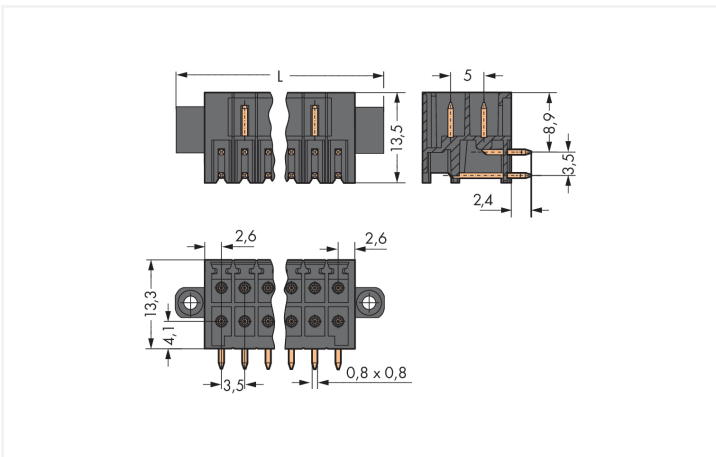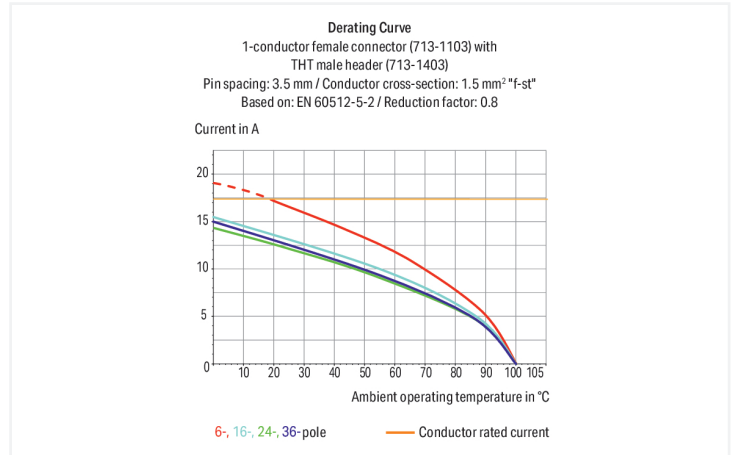

Dimensions in mm

$L = [(pole\ no./2) - 1] \times pin\ spacing + 13.6\ mm$

Male connector, 713 Series, with 3.5 mm pin spacing

Our male connector (item number 713-1426/117-000) ensures effortless electrical installations. The item's dimensions are (31.1 x 15.7 x 13.5) mm (width x height x depth).

Tin is used for coating the contact surfaces. THR is used to solder the pcb connector.

Notes

Safety Information

The MCS – MULTI CONNECTION SYSTEM includes connectors without breaking capacity in accordance with DIN EN 61984. When used as intended, these connectors must not be connected/disconnected when live or under load. When used as intended, these connectors must not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.

Variants:

Other pole numbers
Other solder pin lengths
Gold-plated or partially gold-plated contact surfaces
Other versions (or variants) can be requested from WAGO Sales or configured at <https://configurator.wago.com/>.

Electrical data

Ratings per	IEC/EN 60664-1			Approvals per	UL 1059		
Overvoltage category	III	III	II	Use group	B	C	D
Pollution degree	3	2	2	Rated voltage	150 V	50 V	-
Nominal voltage	80 V	160 V	250 V	Rated current	10 A	10 A	-
Rated impulse withstand voltage	2.5 kV	2.5 kV	2.5 kV				
Rated current	10 A	10 A	10 A				

Approvals per	CSA		
Use group	B	C	D
Rated voltage	150 V	-	-
Rated current	12 A	-	-

Connection Data

Total number of potentials	12	Connection 1	
Number of connection types	1	Pole number	12
Number of levels	2		

Physical data

Pin spacing	3.5 mm / 0.138 inches
Width	31.1 mm / 1.224 inches
Height	15.7 mm / 0.618 inches
Height from the surface	13.3 mm / 0.524 inches
Depth	13.5 mm / 0.531 inches
Solder pin length	2.4 mm
Solder pin dimensions	0.8 x 0.8 mm
Plated through-hole diameter (THR)	1.3 ^(±0.1) mm

Mechanical data

Variable coding	Yes
Anti-rotation protection	Yes

Plug-in connection

Contact type (pluggable connector)	Male connector/plug
Connector (connection type)	for PCB
Mismating protection	Yes
Mating direction to the PCB	0°
Locking of plug-in connection	Threaded flange

PCB contact

PCB contact	THR
Solder pin arrangement	over the entire male connector (in-line)
Number of solder pins per potential	1

Material data

Note (material data)	Information on material specifications can be found here
Color	black
Material group	I
Insulation material (main housing)	Polyphthalamide (PPA GF)
Flammability class per UL94	V0
Contact material	Electrolytic copper (E _{Cu})
Contact Plating	Tin
Fire load	0.076 MJ
Weight	4.2 g
MSL per J-STD 020D	1

Environmental requirements

Limit temperature range	-60 ... +100 °C
Processing temperature	-35 ... +60 °C

Commercial data

Product Group	3 (Multi Conn. System)
PU (SPU)	25 pcs
Packaging type	Box
Country of origin	PL
GTIN	4050821156598
Customs tariff number	85366930000

Product Classification

UNSPSC	39121409
eCl@ss 10.0	27-44-04-02
eCl@ss 9.0	27-44-04-02
ETIM 9.0	EC002637
ETIM 10.0	EC002637
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	a96f2e90-f768-4bec-8362-281da8fe4b2a
SCIP notification number (Belgium)	8be1b5b5-cf61-4340-bd7f-d2c0d2c6c991
SCIP notification number (Bulgaria)	965c6925-2299-4dd6-9887-0cbe4cc2ec0b
SCIP notification number (Czech Republic)	241d4812-89f2-4e38-aca4-ad08b1330178
SCIP notification number (Denmark)	c5fee6ae-264a-4f7c-8c58-8100375c47d3
SCIP notification number (Finland)	e6becd66-16b9-4fce-822e-c5bf4ddd5c8d
SCIP notification number (France)	cb74f9f4-612a-47c4-b821-264fdc0ce9bc
SCIP notification number (Germany)	8efb71ee-8df4-45db-a929-a3e333696bdf
SCIP notification number (Hungary)	ff226486-e14a-48d4-85f6-39287a0a19ae
SCIP notification number (Italy)	c83502cd-9cb5-41d8-9f2f-c9ec5df028cf
SCIP notification number (Netherlands)	a567b21a-3d84-4da4-855e-b0c837c0e21c
SCIP notification number (Poland)	56b024fc-2527-4bcb-a994-38fe06e3e134
SCIP notification number (Romania)	2f296646-71b2-418c-8666-e21f787b1e07
SCIP notification number (Sweden)	c1accd5b-ffaa-4d41-97f6-3f5d3324b58a

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CB DEKRA Certification B.V.	IEC 61984	NL-102427
CSA CSA Group	C22.2	2315087
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-133740

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 713-1426/117-000	↓

Documentation

Additional Information			
Technical Section	03.04.2019	pdf 2027.26 KB	↓
		pdf 535.32 KB	↓

CAD/CAE-Data

CAD data

2D/3D Models
713-1426/117-000



CAE data

ZUKEN Portal
713-1426/117-000



PCB Design

Symbol and Footprint
via SamacSys
713-1426/117-000



Symbol and Footprint
via Ultra Librarian
713-1426/117-000



1 Compatible Products

1.1 System counterpart

1.1.1 Female connector/socket



Item No.: [713-1106/107-000](#)

1-conductor female connector, 2-row; CA-GE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 12-pole; 100% protected against mismatching; Screw flange; black

1.2 Optional Accessories

1.2.1 Coding

1.2.1.1 Coding




Item No.: [714-101](#)

Coding key; orange

Installation Notes

Coding



Coding a male header by inserting a coding pin.