

START SURFACE IP66 2400LM 830 MW SENS IK10 WHT
0049020



Features

- Sensor Dim LED exterior surface mounted luminaire, 350mm diameter, 2400lm as max. lumen output, can be adjusted down to 1650lm by internal switch, 25W max. power consumption, 96lm/W efficacy, 3000K color temperature, CRI80, IP66, IK10, 50,000 hours (L70), white housing, vandal resistant. Integrated Microwave occupancy sensor with daylight harvest, dimming and corridor function, supplied with anti-theft screws


Product Overview

Product name	START SURFACE IP66 2400LM 830 MW SENS IK10 WHT
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Environment	Indoor, Outdoor
General application	Hospitality
ETIM Class	EC002892
E-number FI	4579495
Fixture luminous flux (lm)	2400
Luminaire efficacy (lm/W)	96
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	120
Glare control	< 26
Photobiological Risk Group	RG0
Total power consumption (W)	25
Electrical protection	Class II


START SURFACE IP66 2400LM 830 MW SENS IK10 WHT
0049020

Control gear type	LED driver constant current
Control gear mounting	Integrated
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9003
IP rating	IP66
IK rating	IK10
Product EAN number	5410288490205
Warranty	5 years
Dimming method	Other
Colour Code	830


Photometry

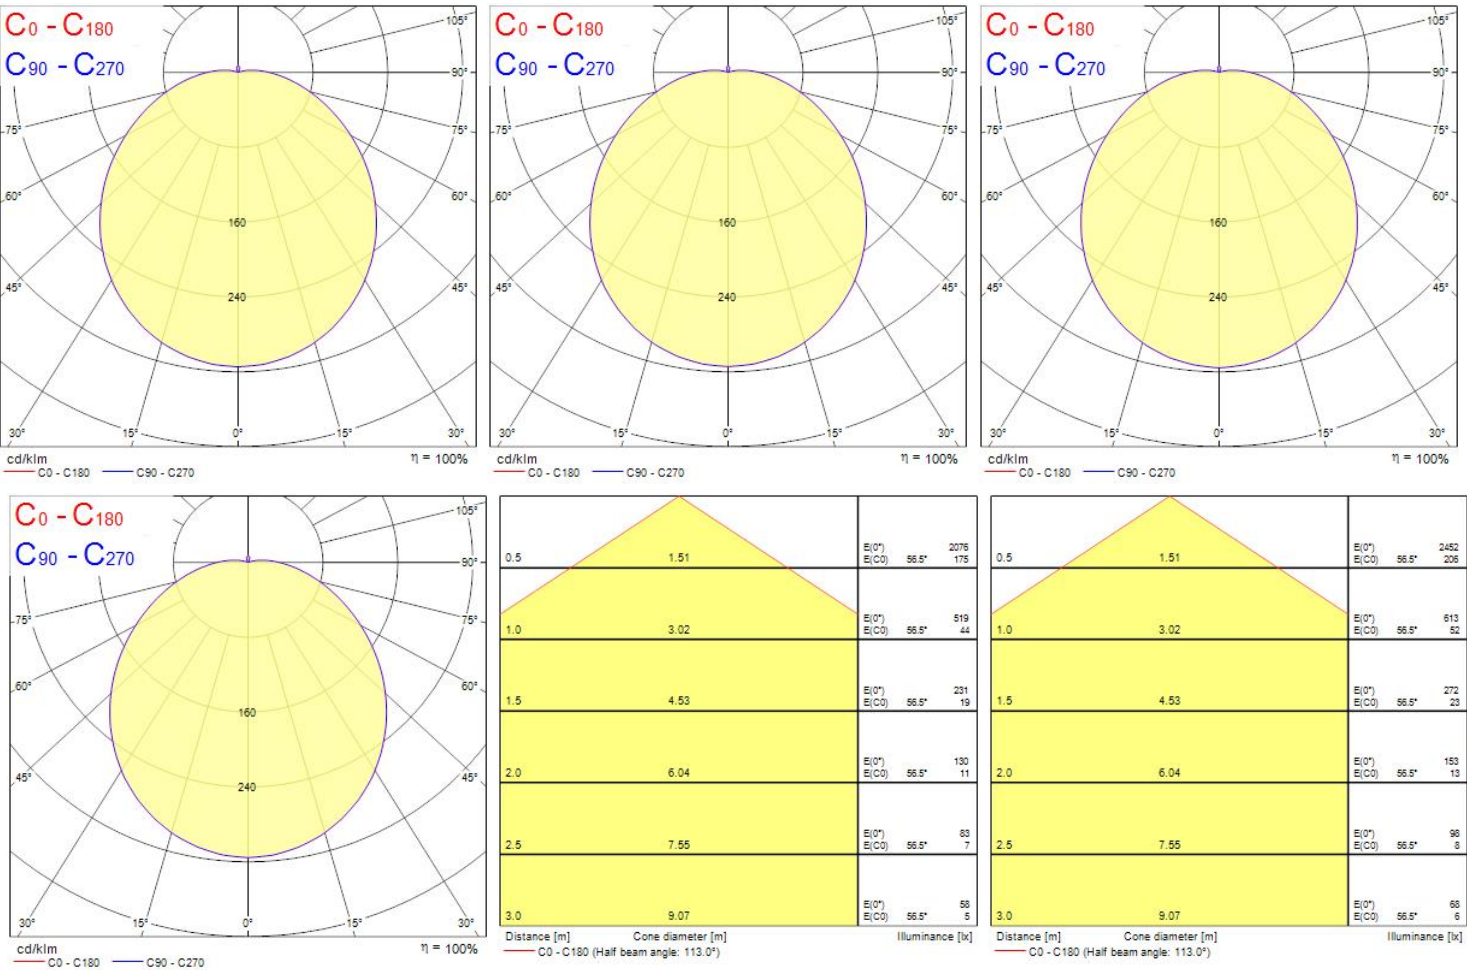

START SURFACE IP66 2400LM 830 MW SENS IK10 WHT
0049020

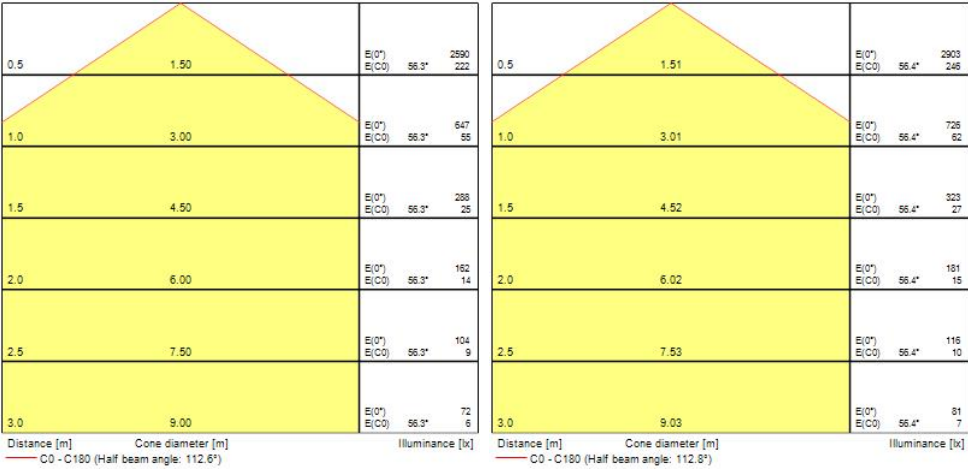

Technical drawings

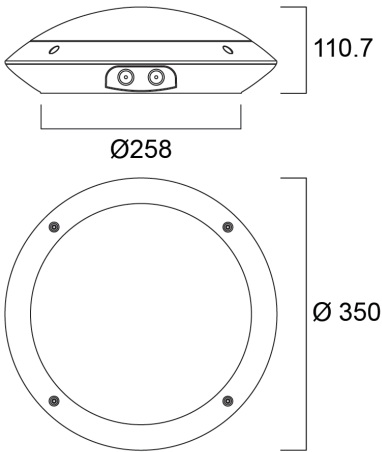

Data table

GENERAL DATA

Product name	START SURFACE IP66 2400LM 830 MW SENS IK10 WHT
Technology	LED
Cap/Base	N/A

START SURFACE IP66 2400LM 830 MW SENS IK10 WHT 0049020

Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Environment	Indoor, Outdoor
General application	Hospitality
Operating temperature range (°C)	0°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4579495
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	2400
Luminaire efficacy (lm/W)	96
LOR (%)	100
Correlated colour temperature (k)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Adjustable chromaticity	N
Beam Angle (°)	120
Glare control	< 26
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	70

ELECTRICAL DATA

Total power consumption (W)	25
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	1
Electrical protection	Class II
Control gear required	No

START SURFACE IP66 2400LM 830 MW SENS IK10 WHT 0049020

Control gear type	LED driver constant current
Control gear mounting	Integrated
Dimmable	Yes
Dimming method	Other
Drive current (mA)	700
Inrush Current (A)	49
Inrush Duration (µs)	31
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	41
Max. products per 13A C Breaker	53
Max. products per 16A C Breaker	66
Max. products per 20A C Breaker	82
Max. products per 10A B Breaker	20
Max. products per 13A B Breaker	31
Max. products per 16A B Breaker	39
Max. products per 20A B Breaker	48
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	2.5

LIFETIME DATA

Lifespan L70 B50	50000
------------------	-------

PHYSICAL DATA

Housing colour	RAL9003
IP rating	IP66
IK rating	IK10
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Height (mm)	111



START SURFACE IP66 2400LM 830 MW SENS IK10 WHT
0049020

Nominal Product Diameter (mm)	350
Weight (kg)	1.2

PACKAGING

Product EAN number	5410288490205
Packaging single length / height (cm)	40.0
Packaging single width (cm)	40.0
Packaging single depth (cm)	11.0
DUN14 (inner)	05410288490205
Units per outer package	1
Packaging outer length / height (cm)	40.0
Packaging outer width (cm)	40.0
Packaging outer depth (cm)	11.0

SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No