
# Technical data sheet

## Screw-in spacer clip

## Item number: 1366254

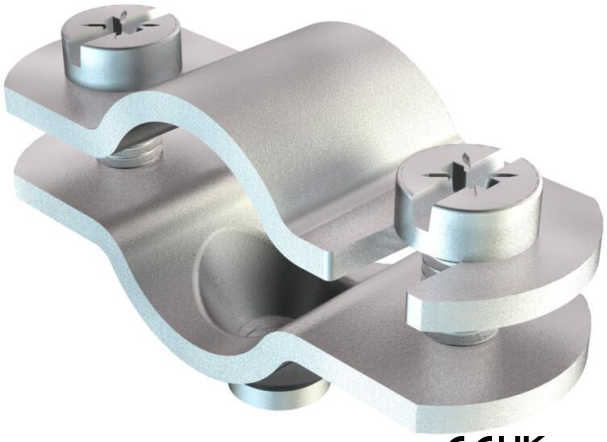

With M6 thread.

| | |
|---|---|
| St | Steel |
| G | Electrogalvanised |

### Master data


| | |
|---|---|
| Item number | 1366254 |
| Type | 731 W 25 G |
| Description 1 | Distance saddle |
| Description 2 | with threaded connection M6 |
| Manufacturer | OBO |
| Dimension | 20-25mm |
| Material | Steel |
| Surface | Electrogalvanised |
| Surface standard | EN ISO 19598 / EN ISO 4042 |
| Smallest sales unit | 50 |
| Unit of quantity | Piece |
| Weight | 3.48 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,0861 kg CO2e / 1 Piece |

# Technical data sheet

## Screw-in spacer clip

## Item number: 1366254

### Dimensions

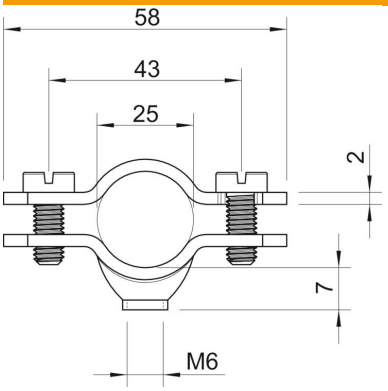


| | |
|---|---|
| Length | 58 mm |
| Dimension A | 58 mm |
| Dimension B | 43 mm |
| Dimension D | 25 mm |
| Dimension d min. | 25 mm |
| Dimension t | 2 mm |

### Technical data

| | |
|---|---|
| Number of cables/pipes | 1 |
| Version for | Closed |
| Fastening type | Screw hole |
| Suitable in fire protection area | no |
| Halogen-free | no |
| Plastic-covered | no |
| Hole size | M6 |
| Material thickness | 2 mm |
| ROHS-conformant | yes |
| Bolt | M5 x 14 |
| Clamping range D, max. | 25 mm |
| Clamping range D, min. | 20 mm |
| UV-resistant | yes |