


Walraven BISMAT® 1000 Stand Pipe Clamp

(A3010)

for stand pipes

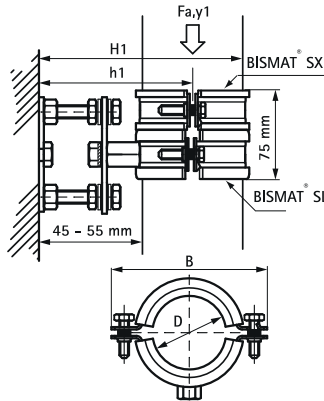

Features & benefits

- adjustable wall plate with Walraven BISMAT® SL Guidance clamp and Walraven BISMAT® SX Socket clamp
- unique set for the installation of cast iron or plastic stand pipes
- to be mounted every second floor, height 3.0 m (from Ø 125 mm, one each floor)
- fixing free of tension throughout infinite adjustment
- adjustable distance between pipe and wall
- material: steel
- zinc plated
- noise insulation tested according to DIN 4109 (insulation exceeds standards)



EPD

Product Number	Outside Pipe Diameter	DN	Total Width x Total Height Distance 1 x Total Depth		Distance 2	Material Thickness	Maximum Allowed Load Faz
Reference letter	D	D	W x H x DtT	Dist 1	Dist 2	MT	Fa,z
Unit description	mm		mm x mm x mm	mm	mm	mm	N
3363070	75	DN 70	144 x 150 x 75	31.5	73.6	3.00	650
3363075	78	DN 70	154 x 150 x 75	31.5	76	3.00	650
3363080	83	DN 80	144 x 153 x 75	31.5	78.5	3.00	820
3363090	89	DN 80	164 x 147 x 75	31.5	80.55	3.00	820
3363100	110	DN 100	176 x 185 x 75	31.5	91.1	3.00	820
3363125	125	DN 125	192 x 200 x 75	31.5	98.5	3.00	820
3363150	160	DN 150	233 x 245 x 75	31.5	116	3.00	820
3363200	210	DN 200	284 x 290 x 75	31.5	141	3.00	820