
finder
RELAYING INNOVATION

REPORT


18 SERIES
PIR movement detectors



NEW









All-in-one
The package contains accessories for surface and recess mounting

PIR movement detectors in anthracite gray

New codes - Type 18.31.8.230.0022: standard
Type 18.31.8.230.0322: with volt-free output contact
Type 18.31.8.230.0032: high ceiling applications (up to 6 meters)


- **Indoor installations 1 NO (SPST-NO) 10 A**
- **Ceiling mounting - Surface and recess mounting**


CE UKCA EAC according to type

findernet.com


Codes	Color	Volt-rated contact	Volt-free contact	Supply	Surface ceiling mounting	Recess ceiling mounting	High ceiling applications (6 meters)
18.21.0.024.0300	white		✓	24 V AC/DC	✓		
18.21.8.230.0000	white	✓		230 V AC	✓		
18.21.8.230.0300	white		✓	230 V AC	✓		
18.31.0.024.0300	white		✓	24 V AC/DC		✓	
18.31.8.230.0000	white	✓		230 V AC		✓	
18.31.8.230.0022	anthracite gray	✓		230 V AC	✓	✓	
18.31.8.230.0300	white		✓	230 V AC		✓	
18.31.8.230.0322	anthracite gray		✓	230 V AC	✓	✓	
18.31.8.230.0031	white	✓		230 V AC	✓	✓	✓
18.31.8.230.0032	anthracite gray	✓		230 V AC	✓	✓	✓


Sensing area
Standard lens

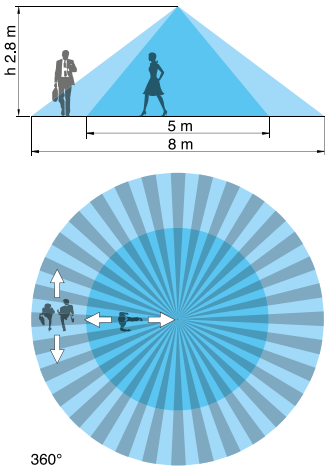

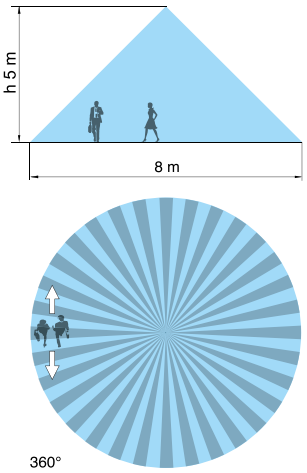


Sensing area
Lens for high ceilings

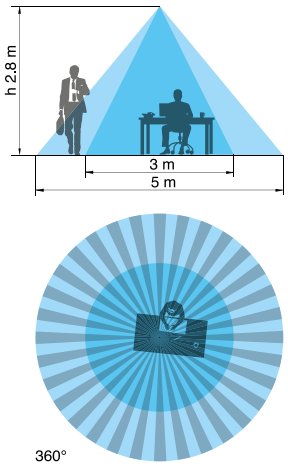

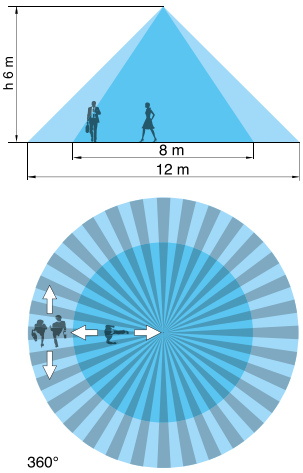


Accessories



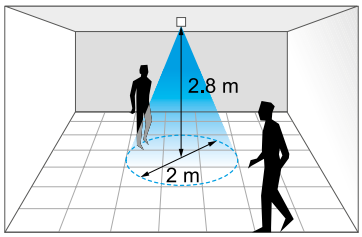


Beam limiter (included in the package)
At an installation height of 2.8 meters the area of survey will reduce at diameter 2 meters.

Wiring diagram

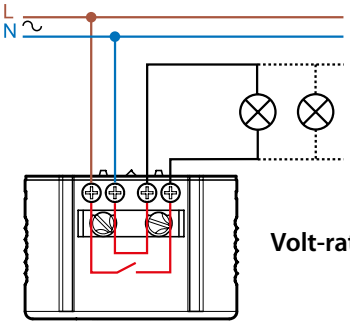

Volt-rated contact

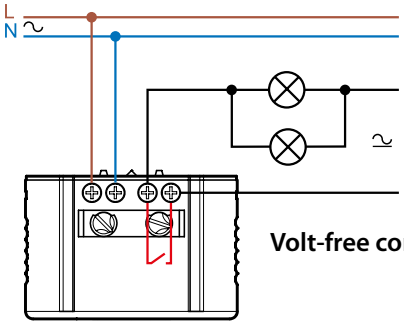

Volt-free contact

Finder reserves the right to make changes to its products and their technical specifications at any time and without prior notice, as part of its policy of continuous improvement. The information contained in this document is provided for indicative purposes only and does not constitute a contractual obligation; errors and omissions excepted. In the event of any discrepancy between the printed and online versions, the latter, available at findernet.com, shall prevail.