


TF96 - 84...96A

Therm. Überlastrelais / Therm. Overload Relay

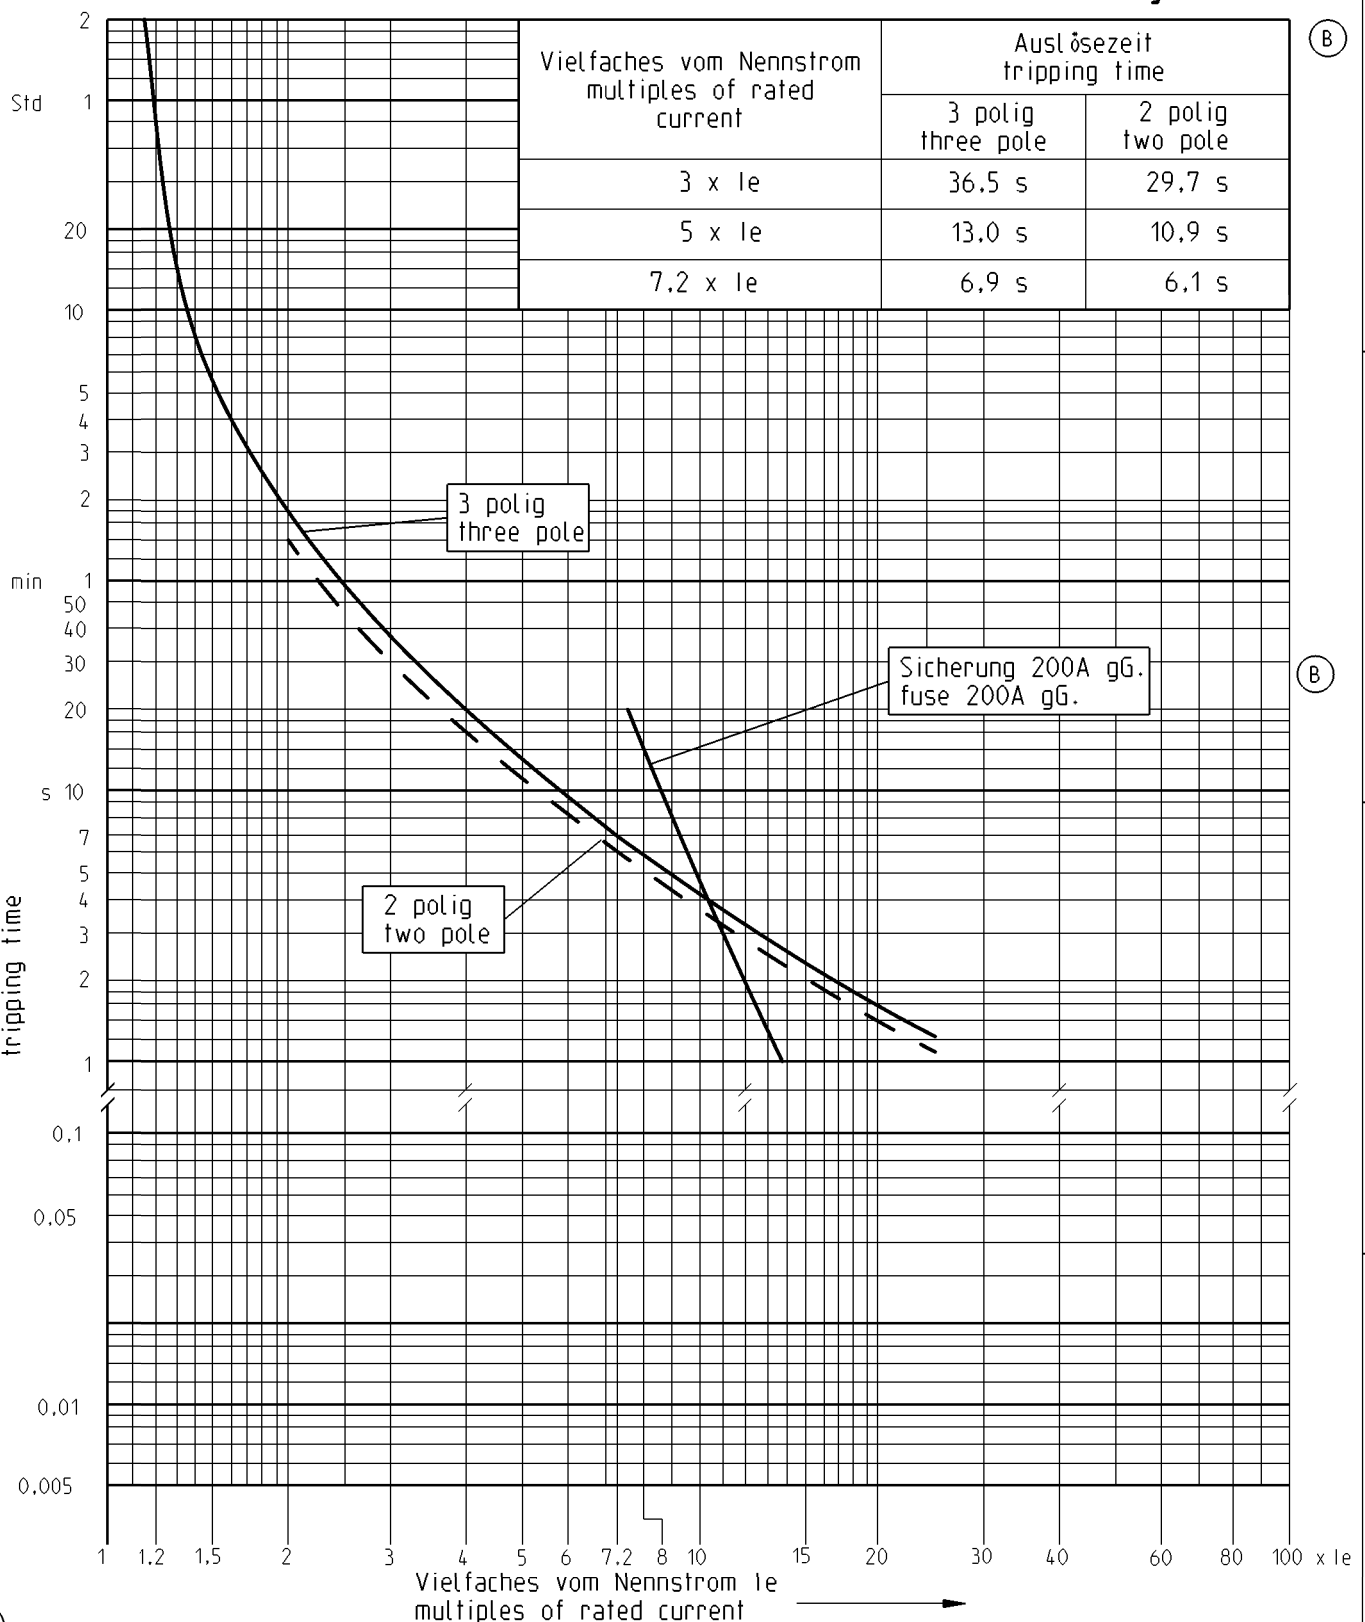

We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden. © Copyright 2015 ABB.

Für dieses Dokument und den darin dargestellten Gegenstand behalten wir uns alle Rechte vor. Vervielfältigung, Bekanntgabe an Dritte oder Verwertung seines Inhalts sind ohne unsere ausdrückliche Zustimmung verboten. © Copyright 2015 ABB.

(B)

Austösekenlinie (aus kaltem Zustand)
Für Nennströme (3-polig) zwischen dem 3- und 8-fachen des Einstellwertes beträgt die Toleranz der Austösezeit $\pm 20\%$
Gültig für Geräte mit Produktionsdatum ab 15183 / 2.7.2015.
Tripping characteristic (from cold state)
For currents (3-pole) between 3 and 8 times the current setting the tolerance of the tripping time is $\pm 20\%$
Valid for devices with production date from 15183 / 2.7.2015.

F6

Proprietary and
Secret Information

Created by	Corinna Raule		Checked by	Gregor Beisel		Approved by	Richard Kommert		
Created on	2015-08-26		Checked on	2015-09-17		Approved on	2015-09-17		
ECN number	ECN000034493	ECN date	25-09-15	Department	CLD	Scale	-		
Revision index	B 3	PRU	DESTO						
Partname	MODEL NAME B.4			Drawing	1SAZ900502_06 B.4				
	Title (DE)		Auslösekenlinie TF96			Format	Language	Sheet No.	No. Sheets
	Title (en)		Tripping characteristic TF96			A4	DE/EN	06	06
					1SAZ900502				